

SANYO

No.2973

2SA1699

PNP Epitaxial Planar Silicon Transistor

High-Voltage Driver Applications

Features

- High breakdown voltage
- Adoption of MBIT process
- Excellent h_{FE} linearity

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector to Base Voltage	V_{CBO}	-400	V
Collector to Emitter Voltage	V_{CEO}	-400	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-200	mA
Collector Current(Pulse)	I_{CP}	-400	mA
Collector Dissipation	P_C	600	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$


Electrical Characteristics at $T_a = 25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = -300\text{V}, I_E = 0$			-0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = -4\text{V}, I_C = 0$			-0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = -10\text{V}, I_C = -50\text{mA}$	60*		200*	
Gain-Bandwidth Product	f_T	$V_{CE} = -30\text{V}, I_C = -10\text{mA}$		70		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = -50\text{mA}, I_B = -5\text{mA}$			-0.8	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = -50\text{mA}, I_B = -5\text{mA}$			-1.0	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -10\mu\text{A}, I_E = 0$	-400			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1\text{mA}, R_{BE} = \infty$	-400			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -10\mu\text{A}, I_C = 0$	-5			V

Continued on next page.

*: The 2SA1699 is classified by 50mA h_{FE} as follows:

60	D	120	100	E	200
----	---	-----	-----	---	-----

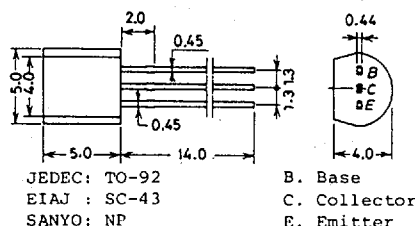Case Outline 2003A
(unit: mm)

Specifications and information herein are subject to change without notice.


SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg. 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110, JAPAN





Continued from preceding page.




Output Capacitance	C_{ob}	$V_{CB} = -30V, f = 1MHz$	min	typ	max	unit
Reverse Transfer Capacitance	C_{re}	$V_{CB} = -30V, f = 1MHz$			5	pF
Turn-ON Time	t_{on}	See specified Test Circuit.			4	pF
Turn-OFF Time	t_{off}				0.25	μs
					5	μs

Switching Time Test Circuit

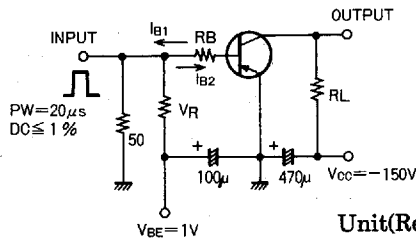Unit(Resistance : Ω , Capacitance : F)

$-10I_{B1} = 10I_{B2} = I_C = -50mA$
 $R_L = 3k\Omega, R_B = 200\Omega$ at $I_C = -50mA$

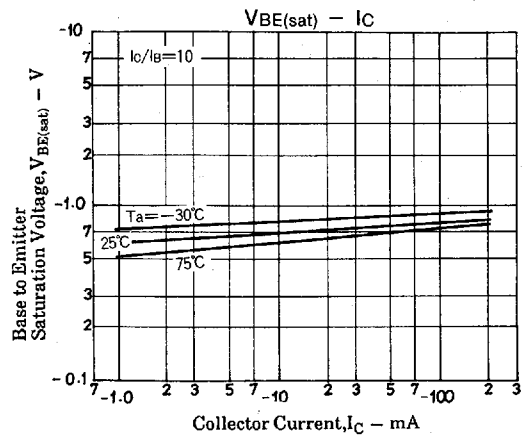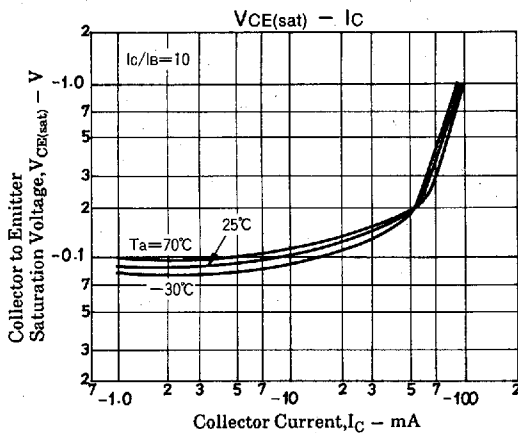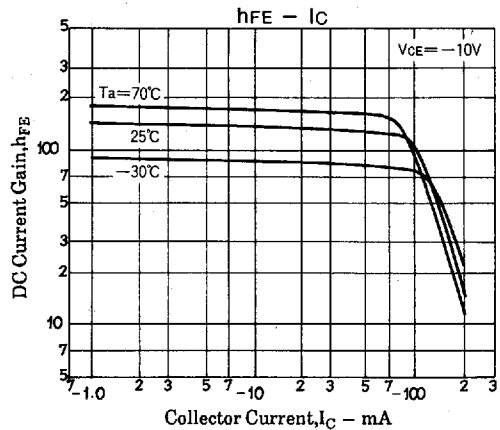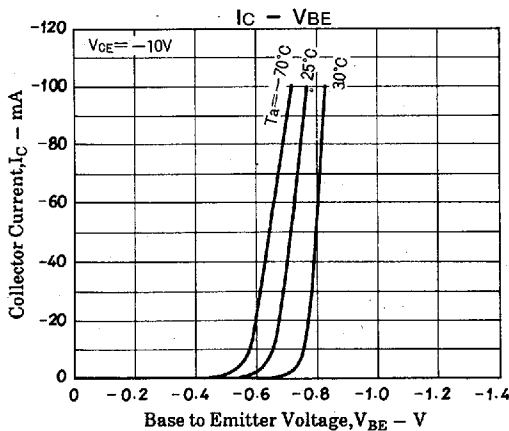


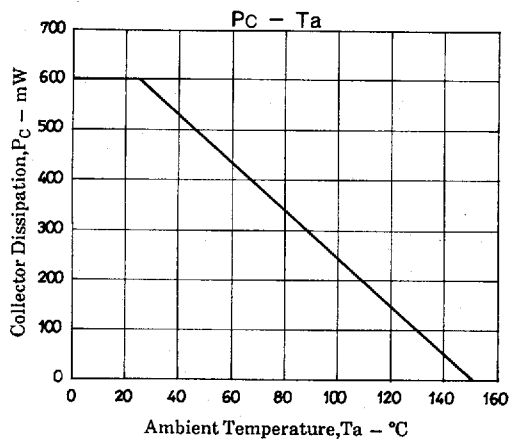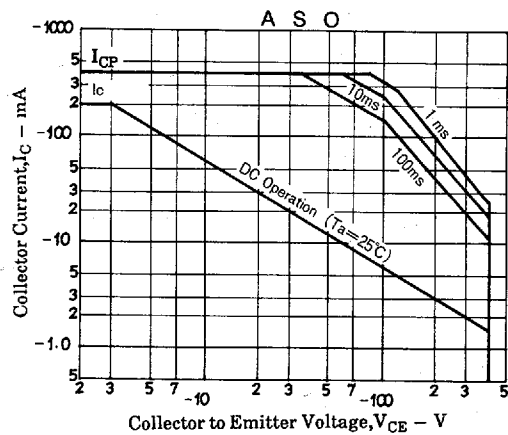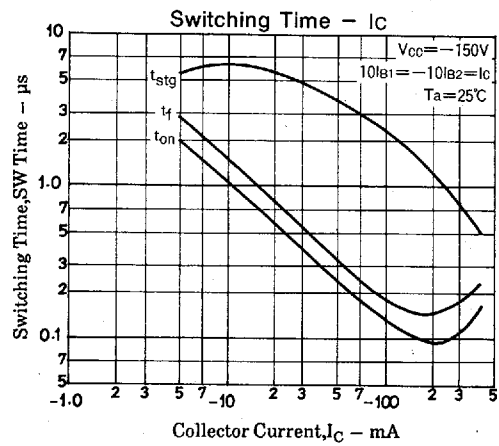


CASE OUTLINES OF LEAD FORMED SMALL SIGNAL TRANSISTORS

- All of Sanyo lead formed small signal transistor case outlines are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.


Case Outline 2003A/2003B (unit : mm)

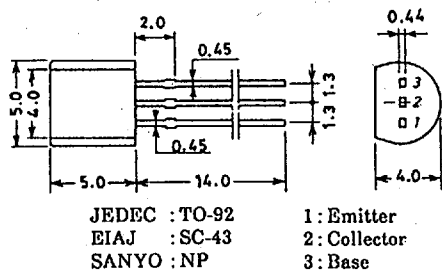


Case Outline 2019A/2019B (unit : mm)

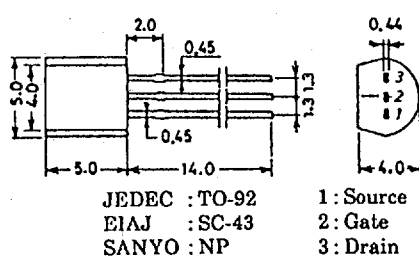


Case Outline 2004A (unit : mm)

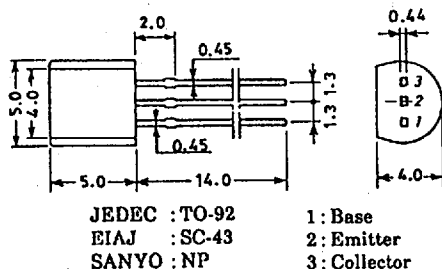


Case Outline 2033 (unit : mm)

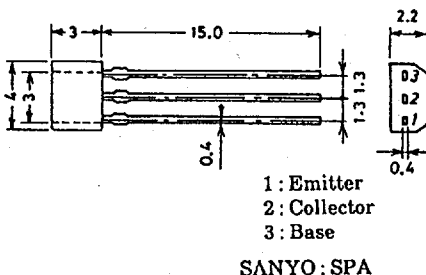


Case Outline 2005A (unit : mm)

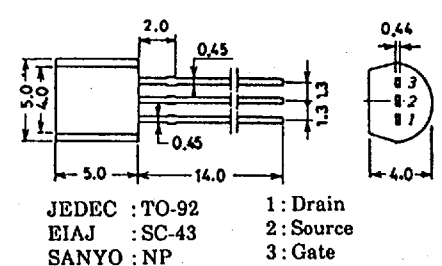


Case Outline 2034/2034A (unit : mm)

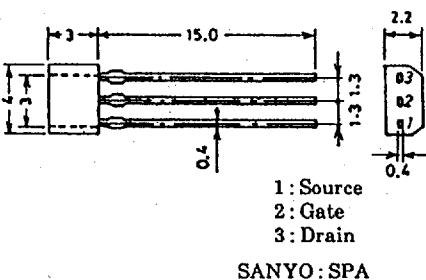


Case Outline 2006A (unit : mm)

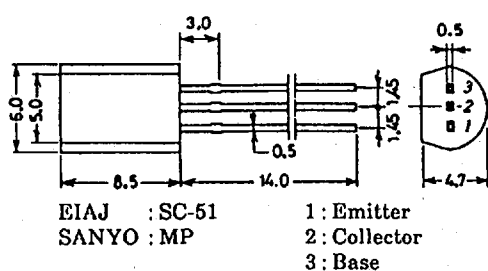

Case Outline 2040 (unit : mm)

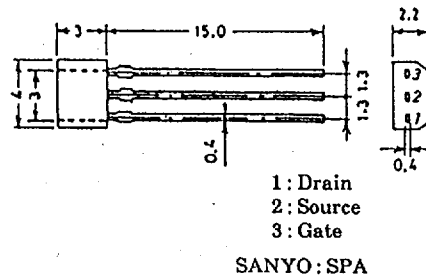

Case Outline 2061 (unit : mm)

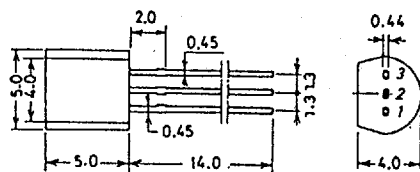


JEDEC : TO-92

EIAJ : SC-43

SANYO : NP

- 1: Emitter
- 2: Base
- 3: Collector


Case Outline 2064 (unit : mm)



- 1: Emitter
- 2: Collector
- 3: Base

SANYO : NMP

Case Outline 2084A (unit : mm)



- 1: Emitter
- 2: Collector
- 3: Base

SANYO : FLIP