


POWER TRANSISTORS



TO-114

TYPE NO.	PT @ 25°C Watts	MAXIMUM RATINGS				hFE		@		Sat Voltages		Test Conditions		
		BV _{CSO}	BV _{CEO}	BV _{ESD}	I _C									
		V	V	V	A	MIN	MAX	A	V	V	V	I _C	I _B	I _{ESD} *
2N2109	250	50	50	15	30	10		10	4	1.5	2.5	10	2	25
2N2110	250	100	100	15	30	10		10	4	1.5	2.5	10	2	25
2N2111	250	150	150	15	30	10		10	4	1.5	2.5	10	2	25
2N2112	250	200	200	15	30	10		10	4	1.5	2.5	10	2	25
2N2113	250	250	250	15	30	10		10	4	1.5	2.5	10	2	25
2N2114	250	300	300	15	30	10		10	4	1.5	2.5	10	2	25
2N2116	250	50	50	15	30	10		15	4	1.5	2.5	15	3	25
2N2117	250	100	100	15	30	10		15	4	1.5	2.5	15	3	25
2N2118	250	150	150	15	30	10		15	4	1.5	2.5	15	3	25
2N2119	250	200	200	15	30	10		15	4	1.5	2.5	15	3	25
2N2123	250	50	50	15	30	10		20	4	1.5	2.5	20	4	25
2N2124	250	100	100	15	30	10		20	4	1.5	2.5	20	4	25
2N2125	250	150	150	15	30	10		20	4	1.5	2.5	20	4	25
2N2126	250	200	200	15	30	10		20	4	1.5	2.5	20	4	25
2N2130	250	50	50	15	30	10		25	4	1.3	2.5	25	5	25
2N2131	250	100	100	15	30	10		25	4	1.3	2.5	25	5	25
2N2132	250	150	150	15	30	10		25	4	1.3	2.5	25	5	25
2N2133	250	200	200	15	30	10		25	4	1.3	2.5	25	5	25


*T_j = 125°C

Solid Power Corporation


■ 0043592 0000430 329 ■

CASE OUTLINES


TO-3

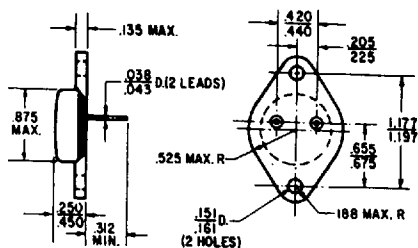


TO-57

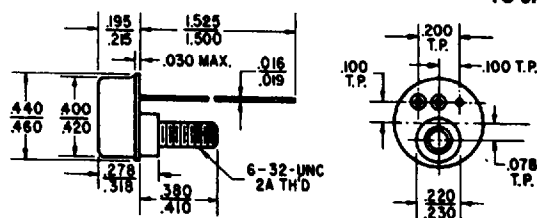


TO-8

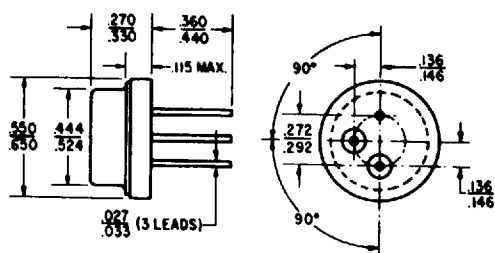


TO-59

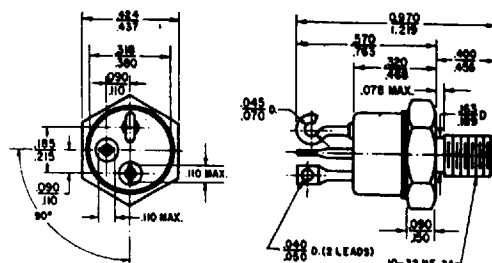


TO-5

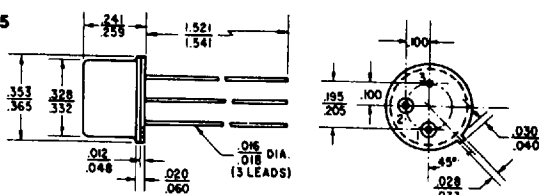


TO-51

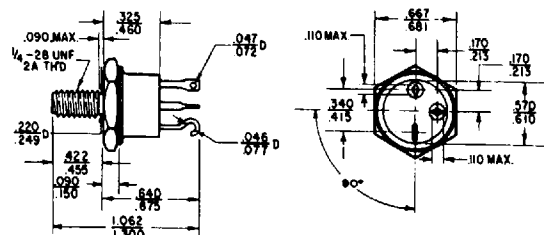


TO-36

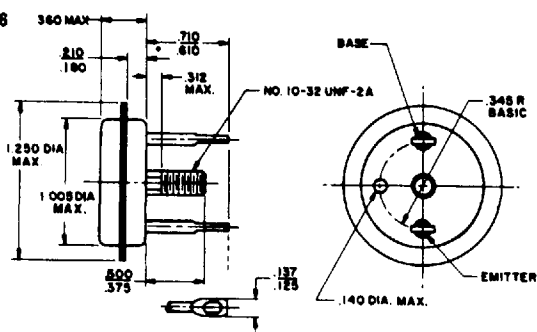


TO-63

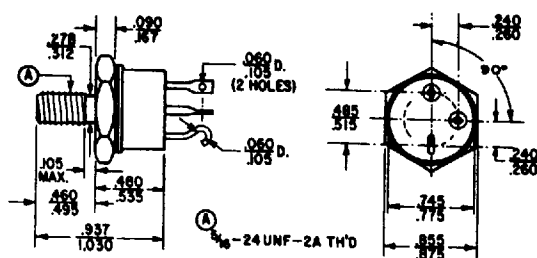

TO-53

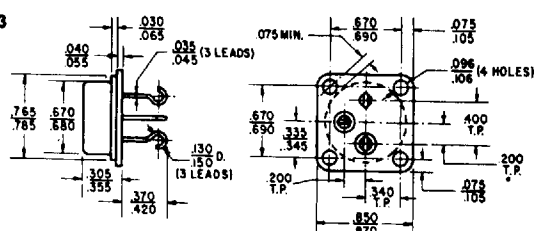

TO-82

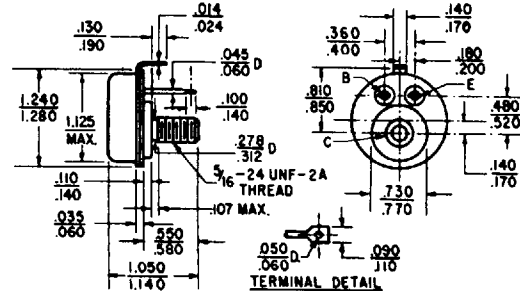

TO-114

