



MICROCHIP

28C16A

16K (2K x 8) CMOS EEPROM


FEATURES

- Fast Read Access Time—150 ns
- CMOS Technology for Low Power Dissipation
 - 30 mA Active
 - 100 μ A Standby
- Fast Byte Write Time—200 μ s or 1 ms
- Data Retention >10 years
- High Endurance - Minimum 10^4 Erase/Write Cycles
- Automatic Write Operation
 - Internal Control Timer
 - Auto-Clear Before Write Operation
 - On-Chip Address and Data Latches
- Data polling
- Chip Clear Operation
- Enhanced Data Protection
 - Vcc Detector
 - Pulse Filter
 - Write Inhibit
- Electronic Signature for Device Identification
- 5-Volt-Only Operation
- Organized 2Kx8 JEDEC Standard Pinout
 - 24-pin Dual-In-Line Package
 - 32-pin Chip Carrier (Leadless or Plastic)
 - 28-pin Thin Small Outline Package (TSOP)
 - 8x20mm
 - 28-pin Very Small Outline Package (VSOP)
 - 8x13.4mm
- Available for Extended Temperature Ranges:
 - Commercial: 0°C to 70°C
 - Industrial: -40°C to 85°C


DESCRIPTION

The Microchip Technology Inc. 28C16A is a CMOS 16K non-volatile electrically Erasable PROM. The 28C16A is accessed like a static RAM for the read or write cycles without the need of external components. During a "byte write", the address and data are latched internally, freeing the microprocessor address and data bus for other operations. Following the initiation of write cycle, the device will go to a busy state and automatically clear and write the latched data using an internal control timer. To determine when a write cycle is complete, the 28C16A uses Data polling. Data polling allows the user to read the location last written to when the write operation is complete. CMOS design and processing enables this part to be used in systems where reduced power consumption and reliability are required. A complete family of packages is offered to provide the utmost flexibility in applications.

BLOCK DIAGRAM

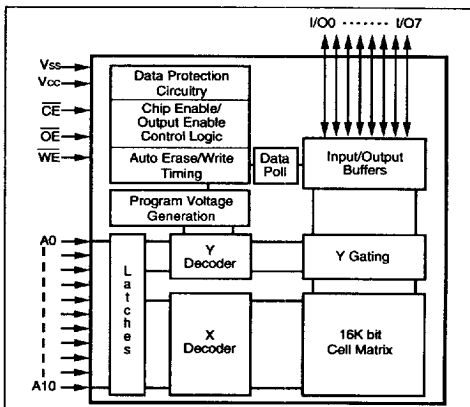

PIN CONFIGURATION

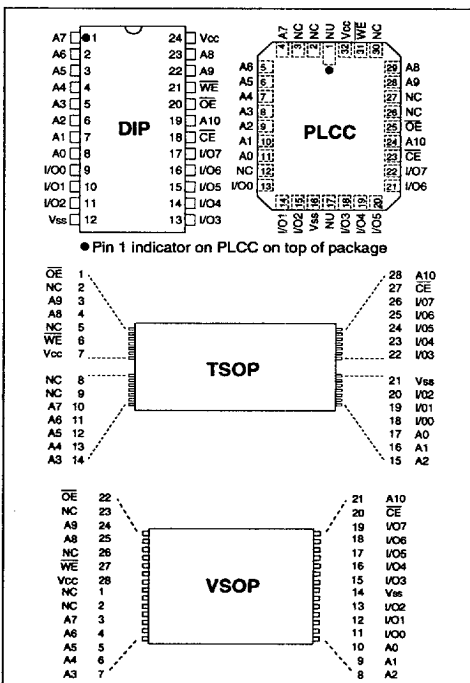

ELECTRICAL CHARACTERISTICS

MAXIMUM RATINGS*

V_{CC} and input voltages w.r.t. V_{SS}..... -0.6V to +6.25V
 Voltage on $\overline{OE}$ w.r.t. V_{SS}..... -0.6V to +13.5V
 Voltage on A₉ w.r.t. V_{SS}..... -0.6V to +13.5V
 Output Voltage w.r.t. V_{SS}..... -0.6V to V_{CC}+0.6V
 Storage temperature -65°C to 125°C
 Ambient temp. with power applied -50°C to 95°C

*Notice: Stresses above those listed under "Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

PIN FUNCTION TABLE

Name	Function
A0 - A10	Address Inputs
$\overline{CE}$	Chip Enable
$\overline{OE}$	Output Enable
$\overline{WE}$	Write Enable
I/O0 - I/O7	Data Inputs/Outputs
V _{CC}	+5V Power Supply
V _{SS}	Ground
NC	No Connect; No Internal Connection
NU	Not Used; No External Connection is Allowed

READ / WRITE OPERATION DC Characteristics

V_{CC} = +5V ±10%
 Commercial (C): Tamb = 0°C to 70°C
 Industrial (I): Tamb = -40°C to 85°C


Parameter	Status	Symbol	Min	Max	Units	Conditions
Input Voltages	Logic "1" Logic "0"	V _{IH} V _{IL}	2.0 -0.1	V _{CC} +1 0.8	V V	
Input Leakage	—	I _I	-10	10	μA	V _{IN} = -0.1V to V _{CC} +1
Input Capacitance	—	C _{IN}	—	10	pF	V _{IN} = 0V; Tamb = 25°C; f = 1 MHz
Output Voltages	Logic "1" Logic "0"	V _{OH} V _{OL}	2.4	0.45	V V	I _{OH} = -400 μA I _{OL} = 2.1 mA
Output Leakage	—	I _{LO}	-10	10	μA	V _{OUT} = -0.1V to V _{CC} +0.1V
Output Capacitance	—	C _{OUT}	—	12	pF	V _{IN} = 0V; Tamb = 25°C; f = 1 MHz
Power Supply Current, Active	TTL input	I _{CC}	—	30	mA	f = 5 MHz (Note 1) V _{CC} = 5.5V;
Power Supply Current, Standby	TTL input TTL input CMOS input	I _{CC(S)TTL} I _{CC(S)TTL} I _{CC(S)CMOS}	—	2 3 100	mA mA μA	$\overline{CE}$ = V _{IH} (0°C to 70°C) $\overline{CE}$ = V _{IH} (-40°C to 85°C) $\overline{CE}$ = V _{CC} -0.3 to V _{CC} +1

Note: (1) AC power supply current above 5 MHz: 1 mA/MHz


READ OPERATION
AC Characteristics

AC Testing Waveform: $V_{IH} = 2.4V$; $V_{IL} = 0.45V$; $V_{OH} = 2.0V$; $V_{OL} = 0.8V$
 Output Load: 1 TTL Load + 100 pF
 Input Rise and Fall Times: 20 ns
 Ambient Temperature: Commercial (C): $T_{amb} = 0^{\circ}C$ to $70^{\circ}C$
 Industrial (I): $T_{amb} = -40^{\circ}C$ to $85^{\circ}C$


Parameter	Sym	28C16A-15		28C16A-20		28C16A-25		Units	Conditions
		Min	Max	Min	Max	Min	Max		
Address to Output Delay	t_{ACC}	—	150	—	200	—	250	ns	$\overline{OE} = \overline{CE} = V_{IL}$
$\overline{CE}$ to Output Delay	t_{CE}	—	150	—	200	—	250	ns	$\overline{OE} = V_{IL}$
$\overline{OE}$ to Output Delay	t_{OE}	—	70	—	80	—	100	ns	$\overline{CE} = V_{IL}$
$\overline{CE}$ or $\overline{OE}$ High to Output Float	t_{OFF}	0	50	0	55	0	70	ns	
Output Hold from Address, $\overline{CE}$ or $\overline{OE}$, whichever occurs first.	t_{OH}	0	—	0	—	0	—	ns	

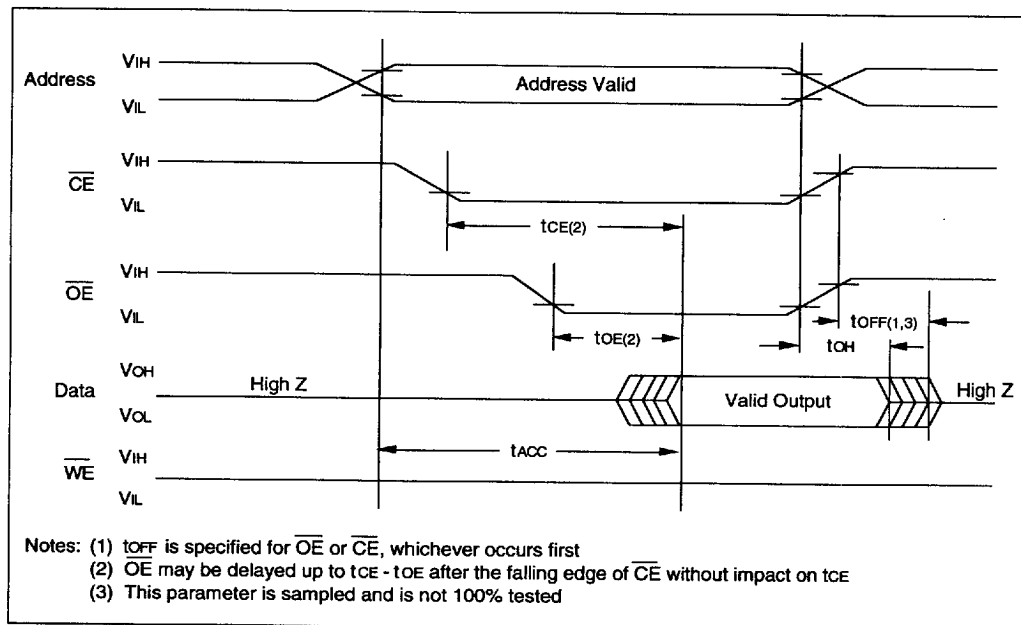READ WAVEFORMS


DATA POLLING WAVEFORMS

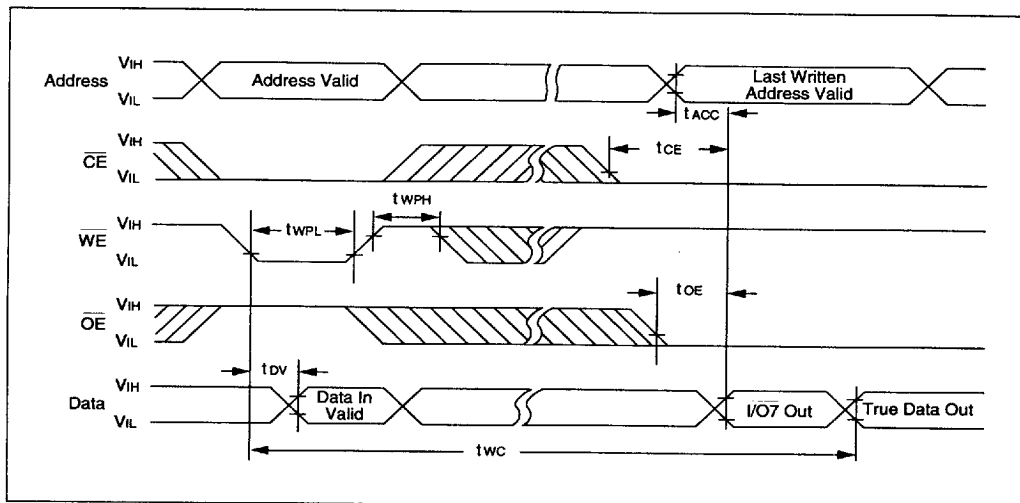

CHIP CLEAR WAVEFORMS

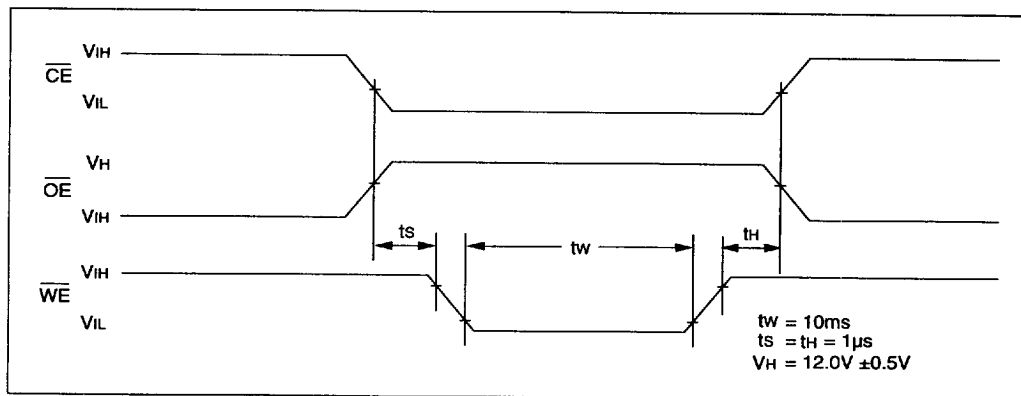

6

SUPPLEMENTARY CONTROL

Mode	$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	A9	Vcc	I/O
Chip Clear	V _{IL}	V _H	V _{IL}	X	Vcc	
Extra Row Read	V _{IL}	V _{IL}	V _H	A9 = V _H	Vcc	Data Out
Extra Row Write	*	V _H	*	A9 = V _H	Vcc	Data In

Note: V_H = 12.0V ± 0.5V * Pulsed per programming waveforms.

DEVICE OPERATION

The Microchip Technology Inc. 28C16A has four basic modes of operation—read, standby, write inhibit, and byte write—as outlined in the following table.

Operation Mode	$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	I/O
Read	L	L	H	Dout
Standby	H	X	X	High Z
Write Inhibit	H	X	X	High Z
Write Inhibit	X	L	X	High Z
Write Inhibit	X	X	H	High Z
Byte Write	L	H	L	Din
Byte Clear	Automatic Before Each "Write"			

X = Any TTL level.

Read Mode

The 28C16A has two control functions, both of which must be logically satisfied in order to obtain data at the outputs. Chip enable ($\overline{CE}$) is the power control and should be used for device selection. Output Enable ($\overline{OE}$) is the output control and is used to gate data to the output pins independent of device selection. Assuming that addresses are stable, address access time (t_{ACC}) is equal to the delay from $\overline{CE}$ to output (t_{CE}). Data is available at the output t_{OE} after the falling edge of $\overline{OE}$, assuming that $\overline{CE}$ has been low and addresses have been stable for at least $t_{ACC-t_{OE}}$.

Standby Mode

The 28C16A is placed in the standby mode by applying a high signal to the $\overline{CE}$ input. When in the standby mode, the outputs are in a high impedance state, independent of the $\overline{OE}$ input.

Data Protection

In order to ensure data integrity, especially during critical power-up and power-down transitions, the following enhanced data protection circuits are incorporated:

First, an internal V_{CC} detect (3.3 volts typical) will inhibit the initiation of non-volatile programming operation when V_{CC} is less than the V_{CC} detect circuit trip.

Second, there is a $\overline{WE}$ filtering circuit that prevents $\overline{WE}$ pulses of less than 10 ns duration from initiating a write cycle.

Third, holding $\overline{WE}$ or $\overline{CE}$ high or $\overline{OE}$ low, inhibits a write cycle during power-on and power-off (V_{CC}).

Write Mode

The 28C16A has a write cycle similar to that of a Static RAM. The write cycle is completely self-timed and initiated by a low going pulse on the $\overline{WE}$ pin. On the falling edge of $\overline{WE}$, the address information is latched. On rising edge, the data and the control pins ($\overline{CE}$ and $\overline{OE}$) are latched.

Data Polling

The 28C16A features Data polling to signal the completion of a byte write cycle. During a write cycle, an attempted read of the last byte written results in the data complement of I/O7 (I/O0 to I/O6 are indeterminable). After completion of the write cycle, true data is available. Data polling allows a simple read/compare operation to determine the status of the chip eliminating the need for external hardware.

Electronic Signature for Device Identification

An extra row of 32 bytes of EEPROM memory is available to the user for device identification. By raising A9 to 12V $\pm 0.5V$ and using address locations 7EO to 7FF, the additional bytes can be written to or read from in the same manner as the regular memory array.

Chip Clear

All data may be cleared to 1's in a chip clear cycle by raising $\overline{OE}$ to 12 volts and bringing the $\overline{WE}$ and $\overline{CE}$ low. This procedure clears all data, except for the extra row.

28C16A

SALES AND SUPPORT

To order or to obtain information, e.g., on pricing or delivery, please use the listed part numbers, and refer to the factory or the listed sales offices.

PART NUMBERS

28C16AF T - 15 I/P

Package:

J Cerdip
L Plastic Leaded Chip Carrier (PLCC)
P Plastic DIP
TS Thin Small Outline Package (TSOP) 8x20mm
VS Very Small Outline Package (VSOP) 8x13.4mm

Temperature Range:

Blank 0°C to 70°C
I -40°C to 85°C

Access Time:

15 150 ns
20 200 ns
25 250 ns

Shipping:

Blank Tube
T Tape and Reel "L" only

Option:

- = t_{WC} = 1 ms
F = t_{WC} = 200 μs

Device:

28C16A 2K x 8 CMOS EEPROM