


INDEXED HANDLES

TYPE PATTERN  **B** **C** **D** **E** **F** THREAD LENGTH OF
MALE THREAD

14 **Cranking handle with folding side handle - high impact resistant**


Matt finish reinforced thermoplastic

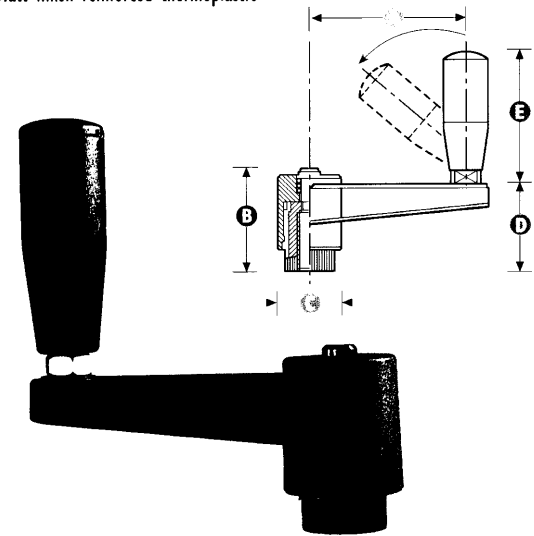

FEMALE	5465	65	45	27	36	56	M8	M10	M12
Plated steel insert	5480	80	52	34	46	75	M10	M12	M14
	54110	110	52	34	47	75	M12	M14	M16

Clamping handle - high impact resistant

Matt finish reinforced thermoplastic

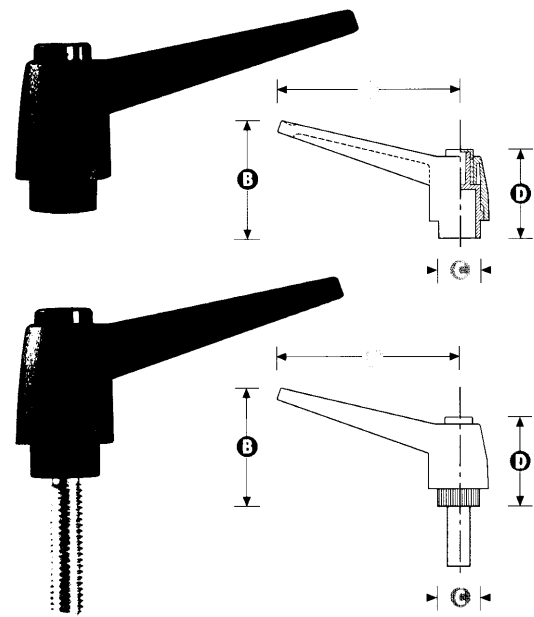

FEMALE	2843	43	32	12	26		M4	M5	M6
Brass insert	2865	65	46	15	37		M6	M8	
	2883	83	57	19	46		M8	M10	
	28104	104	68	24	51		M10	M12	M16
MALE	2843/M	43	32	12	26		M5	M6	15 20 25
Plated steel insert	2865/M	65	46	15	37		M8		20 30 40 50
	2883/M	83	57	19	46		M10		30 35 40 50
	28104/M	104	68	24	51		M12	M16	30 35 50

Also available:
Stainless steel
insert
Orange safety
handle



Operated by a simple lift and rotate movement, all handles include a ratchet for use in tight spaces and the clamping handles are supplied with a comfortable plastic cap as opposed to the usual steel set screw, offering complete electrical insulation for the operator - adjust by pushing the red button and then 'park' the handle in the desired safety position.

Most patterns are available with imperial threads (Whitworth) or bores

TYPE PATTERN  **B** **C** **D** **E** **F** THREAD LENGTH OF
MALE THREAD

Non standard thread diameters, lengths, insert materials and other modifications are available for minimum quantities.
The standard colour is black with a red button. Some patterns are available in a choice of colours. Contact our sales department for details.

All dimensions in mm and are approximate