

**PC Board Mountable Pressure Sensor**  
**0-100 mV Output**  
**Gage Pressure**  
**Wide Temperature Range**

- ▶ **Medical Instrumentation**
- ▶ **Calibration**
- ▶ **Process Control**
- ▶ **Factory Automation**
- ▶ **Air Flow Management**
- ▶ **Leak Detection**



## DESCRIPTION

The Models 26 and 27 are high performance, temperature compensated, piezoresistive silicon pressure sensors packaged in a bottom tube TO-8 configuration. They provide excellent performance and long-term stability.

Gage pressure ranges from 0-15 PSI to 0-250 PSI are available. Integral temperature compensation is provided over a range of -20°C to +85°C using laser-trimmed resistors. An additional laser-trimmed resistor is included in the Model 27 to normalize pressure sensitivity variations by programming the gain of an external differential amplifier. This provides sensitivity interchangeability of  $\pm 1\%$ .

Please refer to the low pressure section for information on products with operating pressures less than 0-2 PSI. For an uncompensated sensor (Model 25) please contact the factory for additional information.


## FEATURES

- ▶ TO-8 Package
- ▶ -20°C to +85°C Compensated Temperature Range
- ▶  $\pm 0.1\%$  Non-linearity
- ▶  $\pm 0.5\%$  Temperature Performance
- ▶ 1.0% Interchangeable Span (provided by gain set resistor)
- ▶ Solid State Reliability
- ▶ Low Power

## STANDARD RANGES

Range	psig
0 to 15	●
0 to 30	●
0 to 50	●
0 to 100	●
0 to 250	●

## DIMENSIONS

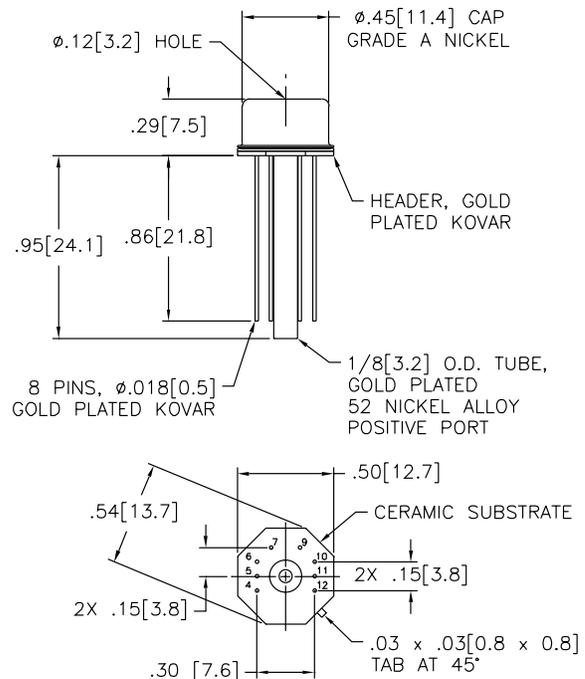

DIMENSIONS ARE IN INCHES [mm]

**PERFORMANCE SPECIFICATIONS**


Supply Current: 1.5mA  
 Ambient Temperature: 25°C (Unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Full Scale Output Span, (without gain set resistor)	75	100	150	mV	1
Zero Pressure Output			2	±mV	3
Pressure Non-linearity		0.05	0.1	±% Span	2
Pressure Hysteresis		0.01	0.1	±% Span	
Input Resistance	2500	3500	4500	Ω	
Temperature Error – Span		0.3	0.5	±% Span	3, 4
Temperature Error – Zero		0.1	0.5	±% Span	3, 4
Temperature Coefficient - Resistance		0.145		%/°C	4
Thermal Hysteresis – Zero		0.05		±% Span	4
Short Term Stability of Offset		0.05		±% Span	11
Short Term Stability of Span		0.05		±% Span	11
Long Term Stability of Offset		0.1		±% Span	12
Long Term Stability of span		0.1		±% Span	12
Supply Current	0.5	1.5	2.0	mA	5
Response Time (10% to 90%)		1.0		msec	6
Output Noise		1.0		μV p-p	7
Output Load Resistance	5			MΩ	8
Insulation Resistance (50 VDC)	50			MΩ	13
Pressure Overload			3X	Rated	9
Operating Temperature	-40°C to +125°C				
Storage Temperature	-50°C to +150°C				
Media	Non-corrosive Gases Compatible with Wetted Materials				10
Weight	3 Grams				


**Notes**

1. Output span of unamplified sensor.
2. Best Fit Straight Line.
3. For Models 26, 27, compensation resistors are an integral part of the sensor package; no additional external resistors are required. Pins 11 and 12 must be kept open. Model 27 is interchangeable only when used with a gain stage.
4. Temperature range: -20°C to +85°C in reference to 25°C.
5. Guarantees input/output ratiometricity.
6. For a zero-to-full scale pressure step change.
7. 10 Hz to 1 kHz.
8. Prevents increase of TC-Span due to output loading.
9. 3X or 500 psi maximum, whichever is less. 20 psi for 2 psi and 5 psi versions.
10. Wetted materials are glass, ceramic, silicon, RTV, nickel.
11. Normalized offset bridge voltage: 7 days.
12. 1 year.
13. Between case and sensing element.

**CONNECTIONS**

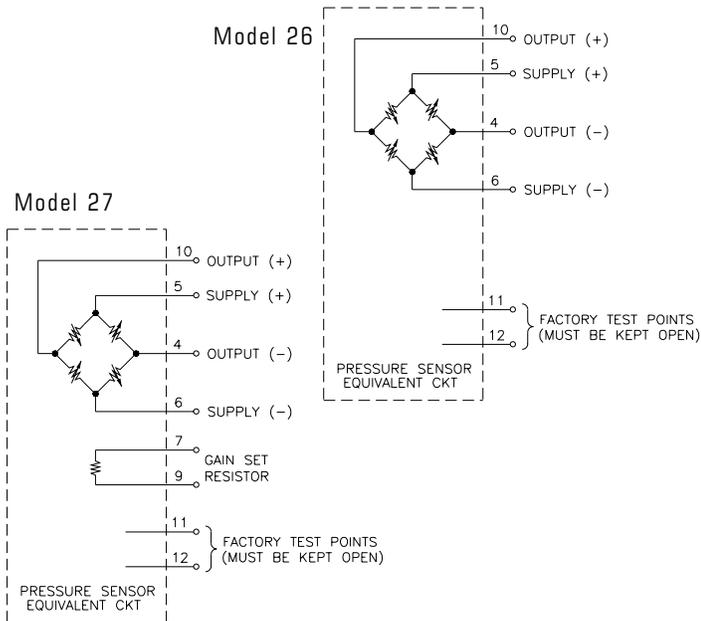

**ORDERING INFORMATION**



**APPLICATION SCHEMATIC**

