

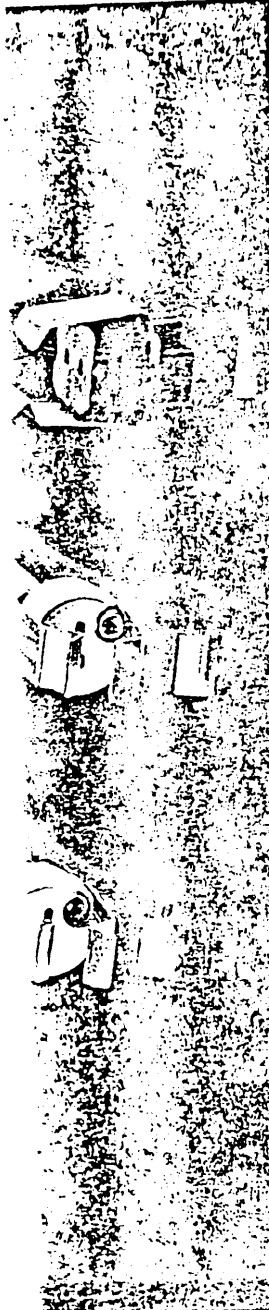


530-669



T200
T250



5 A /
10 A
50 V

i

see pages 500...

max. ϕ 1.8 mm

pkg. wt. part no.
500 20g 25.105.3101.00

Screw fixing

Rating 10 A / 50 V

Housing: ceramic

T 250 for the contacts:

(material Ni)

Wires: Cu, nickel plated





1.0 mm², insulation PTFE

(max. 250° C),

with ferrule

Free cable length: 140 mm

Rear cable entry

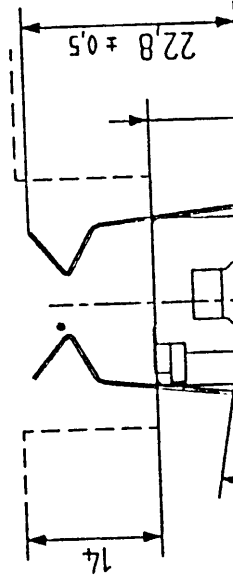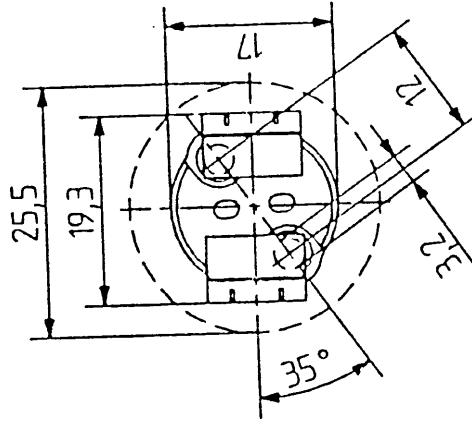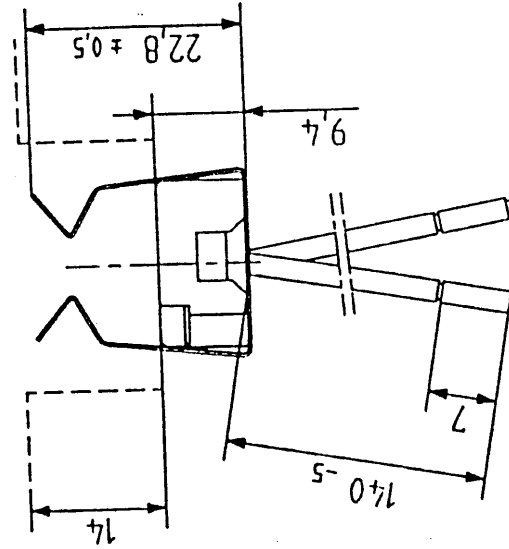

Screw fixing

thread inserts M 3

Rating 10 A / 50 V

Housing: ceramic

T 250 for the contacts:

(material Ni)

Wires: Cu, nickel plated

1.0 mm², insulation PTFE

(max. 250° C),

500 8g 25.105.4201.00