

3 Watt Single Output DC/DC Converters

3355 Vincent Road, Pleasant Hill, CA 94523-4389 800-542-3355 Telephone (415)932-3911 FAX: (415)932-6017



FEATURES

T-57-11

- Low Profile Copper Case (0.375" High)
- Six-Sided Shielded Case
- Low Input/Output Noise Operation
- 500 VDC Input/Output Isolation
- Short Circuit Protected Output
- Output Overvoltage Clamp
- Fixed Frequency Operation Independent of Line and Load
- Highly Regulated/Low Drift Output
- Rugged High Speed MOSFET Power Chopper
- 5 Year Warranty

DESCRIPTION

Ideal for industrial applications or other systems that require direct PCB mounting, these 3 Watt Single Output Converters yield low noise and highly stable DC outputs.

The converters are designed with an LC input filter, MOSFET push-pull power chopper and an isolation transformer. Excellent line and load regulation are achieved by incorporating a linear post regulator.


The transformer provides 500 VDC isolation between input and output allowing the converters output to be floated above ground. Radiated noise from these 3 Watt converters is significantly reduced by using a low profile, six-sided shielded copper case. The CALEX 5 Year Warranty covers all units in this series.

SELECTION CHART

MODEL	INPUT RANGE VDC		OUTPUTS VDC	OUTPUTS mA	CASE
	MIN	MAX			
12S5.600*	10.56	15.60	5.0	600	D
12S12.250*	10.56	15.60	12.0	250	D
12S15.200*	10.56	15.60	15.0	200	D
24S5.600*	21.12	31.20	5.0	600	D
24S12.250*	21.12	31.20	12.0	250	D
24S15.200*	21.12	31.20	15.0	200	D
28S5.600*	24.64	36.40	5.0	600	D
28S12.250*	24.64	36.40	12.0	250	D
28S15.200*	24.64	36.40	15.0	200	D
48S5.600*	42.24	62.40	5.0	600	D
48S12.250*	42.24	62.40	12.0	250	D
48S15.200*	42.24	62.40	15.0	200	D

*These units are Recognized to UL 1012 and 1459-2.

3 WATT SINGLE SERIES BLOCK DIAGRAM

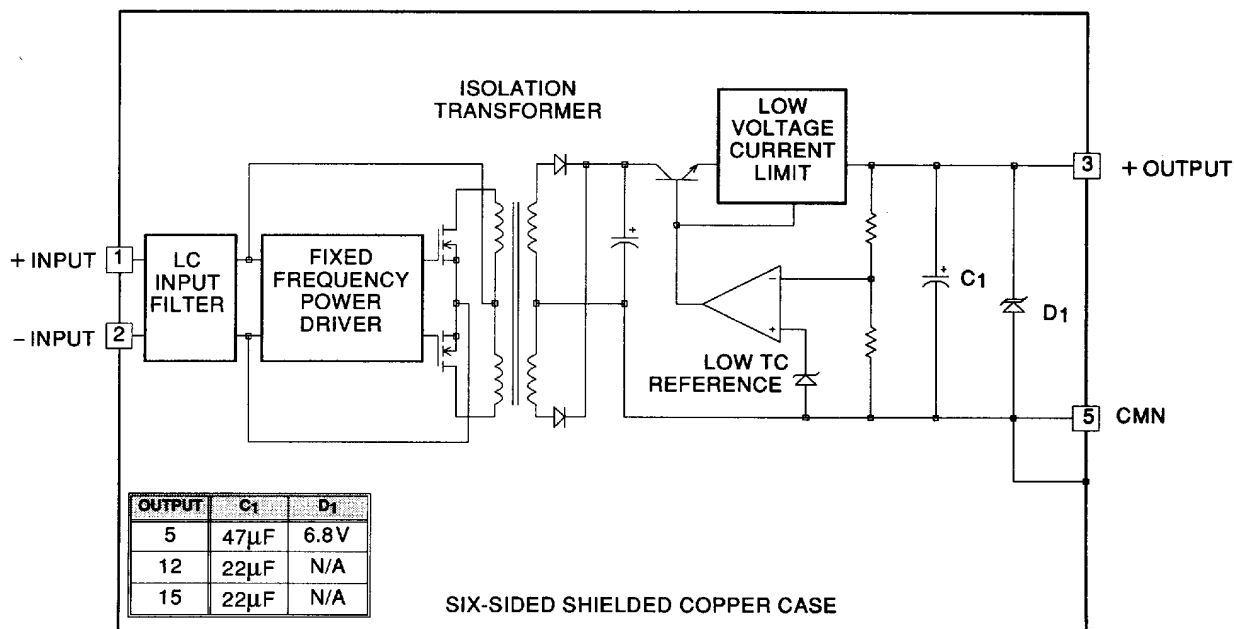

3 Watt Single Output DC/DC Converters



3355 Vincent Road, Pleasant Hill, CA 94523-4389 800-542-3355 Telephone (415)932-3911 FAX: (415)932-6017

T-57-11

INPUT PARAMETERS(1)									
MODEL		12S5.600		12S12.250	12S15.200	24S5.600	24S12.250	24S15.200	UNITS
Voltage Range		MIN	10.56			21.12			VDC
		MAX	15.60			31.20			
Reflected Ripple, 0-20MHz BW		TYP	5			5			mA p-p
		MAX	7			10			
Input Current Full Load		TYP	435	390	389	203	199	191	mA
No Load		TYP	43	43	54	20	23	27	
Efficiency		TYP	60			63			%
Switching Frequency		TYP				55			kHz
Maximum Input Overvoltage, 100mS No Damage		MAX	18.7			37.4			VDC
Turn-on Time, 1% Output Error			1			1			mSec
Recommended Fuse			Slow Blow Type (2)						
MODEL		28S5.600		28S12.250	28S15.200	48S5.600	48S12.250	48S15.200	UNITS
Voltage Range		MIN	24.64			42.24			VDC
		MAX	36.40			62.40			
Reflected Ripple (1), 0-20MHz BW		TYP	3			5			mA p-p
		MAX	10			15			
Input Current Full Load		TYP	180	168	164	107	103	100	mA
No Load		TYP	19	19	21	16	16	17	
Efficiency		TYP	64			60			%
Switching Frequency		TYP				55			kHz
Maximum Input Overvoltage 100mS No Damage		MAX	43.0			68.0			VDC
Turn-on Time, 1% Output Error		TYP	1			1			mSec
Recommended Fuse			Slow Blow Type (2)						

OUTPUT PARAMETERS(1)								
MODEL		12S5.600 28S5.600	24S5.600 48S5.600	12S12.250 28S12.250	24S12.250 48S12.200	12S15.200 28S15.200	24S15.200 48S15.200	UNITS
Output Voltage		5		12		15		VDC
Rated Current (3)	MIN MAX	0 600		0 250		0 200		mA
Voltage Range 100% Load	MIN TYP MAX	4.950 5.000 5.050		11.900 12.000 12.100		14.900 15.000 15.100		VDC
Load Regulation 0-100% Load	TYP MAX	0.02 0.10						%
Line Regulation Vin = Min-Max VDC	TYP MAX	0.02 0.10						%
Short Term Stability (4)	TYP	0.05						%
Long Term Stability	TYP	0.3						%/kHrs
Transient Response (5)	TYP	20						µSec
Dynamic Response (6)	TYP	120		45		40		mV peak
Input Ripple Rejection (7)	TYP	60						dB
Noise, 0-20MHz BW	TYP MAX	10 40						mV p-p
Temperature Coefficient	TYP MAX	50 200						ppm/°C
Overvoltage Clamp (8)	TYP	6.8		-		-		VDC
Short Circuit Protection to Common for all Outputs		Short Term, 1 Minute Maximum (2)						

NOTES:


- (1) All parameters measured at 25° C, nominal voltage and full rated load unless otherwise noted. Refer to the CALEX Application Notes for the definition of terms, measurement circuits and other information.
- (2) For long term short circuit protection of the converters, install a slow blow fuse in the input circuit. Choose a fuse size that is 125% of your applications actual input current and does not exceed 115% of the full load input current.
- (3) No minimum Load required.
- (4) Short term stability is specified after a 30 minute warm-up at full load and with constant line, load and ambient conditions.
- (5) The transient response is specified as the time required to settle from 100% step load change (rise time of step = 2μSec.) to a 1% error band.
- (6) Dynamic response is the peak overshoot voltage during the transient response time defined in note 5 above.
- (7) The input ripple rejection is specified for DC to 120Hz ripple with a modulation amplitude of 1% Vin.
- (8) For module protection only, see also note 2.

3 watt Single Output DC/DC Converters

3355 Vincent Road, Pleasant Hill, CA 94523-4389 800-542-3355 Telephone (415)932-3911 FAX: (415)932-6017



GENERAL SPECIFICATIONS (1)			
MODEL		ALL MODELS	UNITS
ISOLATION			
Isolation Voltage	MIN	500	VDC
Input-Output 10µA Leakage			
Input to Output Capacitance	TYP	75	pF
ENVIRONMENTAL			
Case Operating Range, No Derating	MIN MAX	-25 80	°C
Case Functional Range (9)	MIN MAX	-30 85	°C
Storage Range	MIN MAX	-55 100	°C
Thermal Impedance (10)	TYP	10	°C/Watt
Unit Weight	TYP	1.7	oz
Case		D	
Mounting Kits		MS15 & MS6	

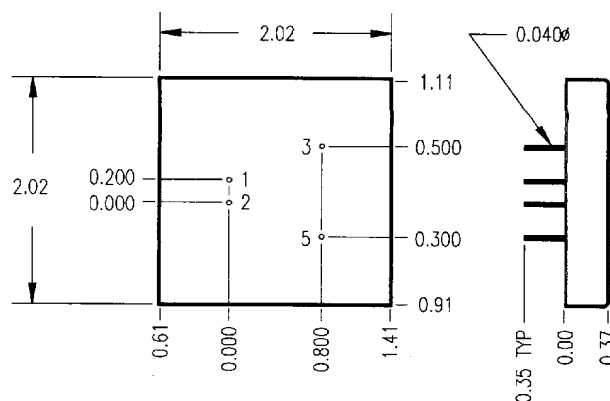

BOTTOM VIEW

Mechanical tolerances unless otherwise noted:

X.XX dimensions: ± 0.020 inches







X.XXX dimensions: ± 0.005 inches

Seal around terminals is not hermetic. Do not immerse units in any liquid.

(9) The functional temperature range is intended to give an additional data point for use in evaluating this power supply. At the low functional temperature the power supply will function with no side effects, however, sustained operation at the high functional temperature will reduce expected operational life. The data sheet specifications are not guaranteed over the functional temperature range.

(10) The case thermal impedance is specified as the case temperature rise over ambient per package watt dissipated.

PIN	FUNCTION
1	+INPUT
2	-INPUT
3	+OUTPUT
5	CMN

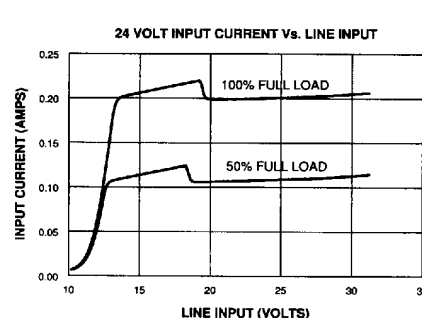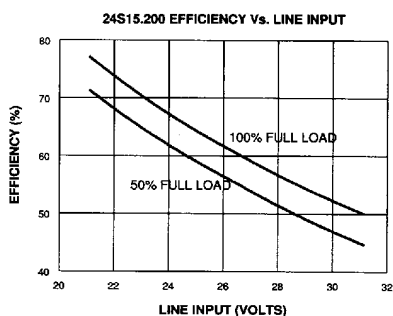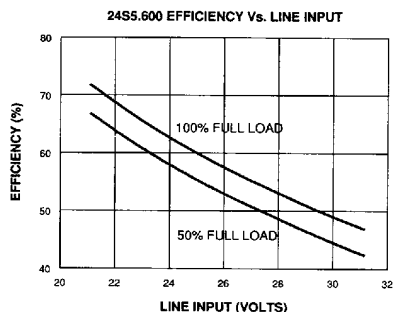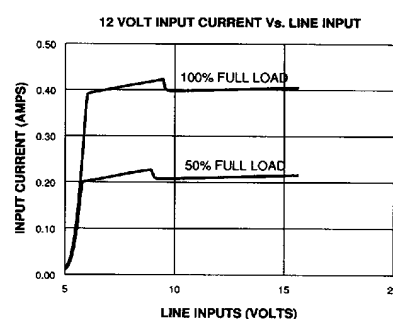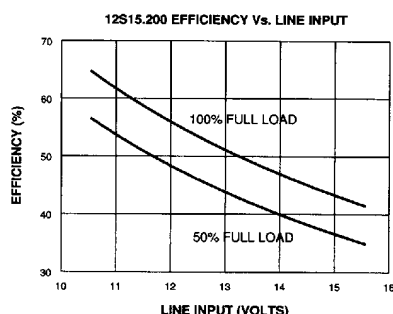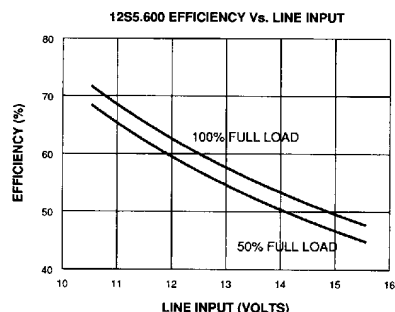

3 Watt Single Output DC/DC Converters

Typical Performance (Tc=25°C; Full Rated Load). 52E D ■ 1811250 0001121 T38 ■ CEX

T-57-11

