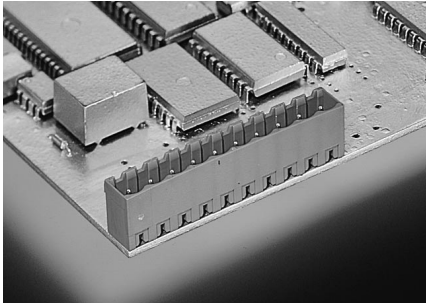
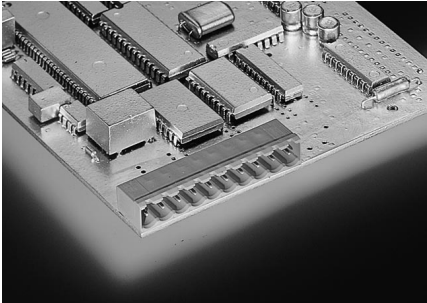
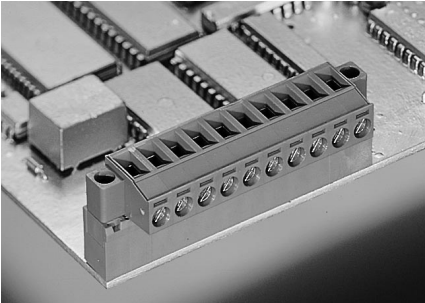
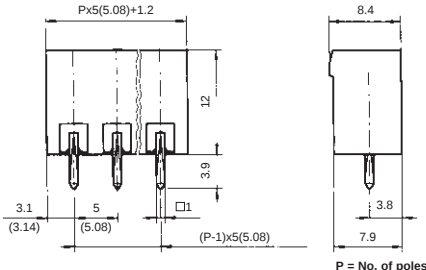
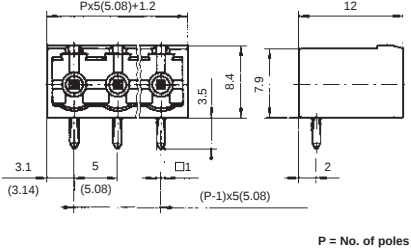
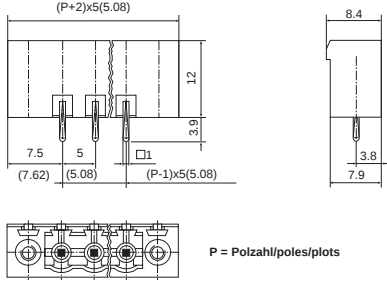


Vertical 95V Series	Horizontal 95H Series	Vertical 95FV Series
● Closed ended socket for 950/910 series ● 5.08mm pitch	● Closed ended socket for 950/910 series ● 5.08mm pitch	● Flanged socket for 950F series ● 5.08mm pitch
		
Part number 21.95V/** Number of poles 2-24 poles **Insert required No. of poles	Part number 21.95H/** Number of poles 2-24 poles **Insert required No. of poles	Part number 21.95FV/** Number of poles 2-10 poles **Insert required No. of poles
Ratings		
   UL 1059 CSA 22.2 No.158 DIN VDE 0627 Rated voltage 300 V 300 V 250 V Rated current 15 A 15 A 12 A (T60) Rating impulse voltage/dirt level 4.0 kV/3	   UL 1059 CSA 22.2 No.158 DIN VDE 0627 Rated voltage 300 V 300 V 250 V Rated current 15 A 15 A 12 A (T60) Rating impulse voltage/dirt level 4.0 kV/3	   UL 1059 CSA 22.2 No.158 DIN VDE 0627 Rated voltage 300 V 300 V 250 V Rated current 15 A 15 A 12 A (T60) Rating impulse voltage/dirt level 4.0 kV/3
Maximum rated cross section		
Materials		
Insulating material PA Flammability class UL94 V-0 Temperature range -30°C/+105°C Contact PIN Cu Colour Green RAL 6018	Insulating material PA Flammability class UL94 V-0 Temperature range -30°C/+105°C Contact PIN Cu Colour Green RAL 6018	Insulating material PA Flammability class UL94 V-0 Temperature range -30°C/+105°C Contact PIN Cu Colour Green RAL 6018
Dimensions		
Spacing 5.08mm (5.0mm) PCB hole diameter 1.4mm  Options: ● 5.0mm, 7.62mm PIN pitch ● Open ended ● Coding	Spacing 5.08mm (5.0mm) PCB hole diameter 1.4mm  Options: ● 5.0mm, 7.62mm PIN pitch ● Open ended ● Coding	Spacing 5.08mm (5.0mm) PCB hole diameter 1.4mm  Options: ● 5.0mm PIN pitch ● Coding