
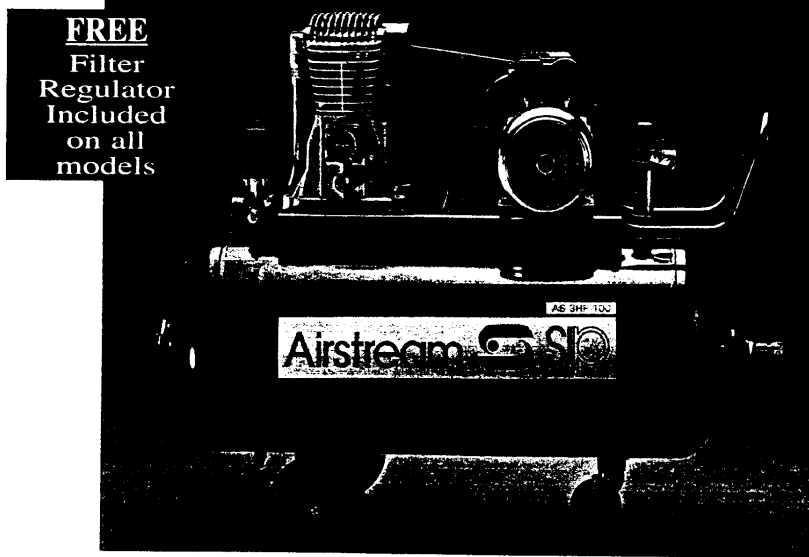


SIP AS2.5HP/50, AS2.5HP/100, AS3HP/50, AS3HP/100,  
AS3HP/150, AS3HP/200 Professional

714 7557  
**Airstream**



**HEAVY  
DUTY  
MOTOR**

**CAST IRON  
CYLINDER LINERS**

The SIP Professional Airstream range of air compressors is a sturdily constructed line up of belt driven models designed for use in factories, farms, workshops, garages, etc where highly reliable daily use is essential.



The AS2.5HP/50, AS2.5HP/100, AS3HP/50 and 3HP/100 are wheel mounted (and fitted with a pressure regulator) for maximum mobility. The other models are stationary units and also produced to the highest standards.

All models feature cast iron cylinder liners for maximum wear resistance and longer life, air receivers are built to the latest EEC requirements, heavy duty special UK specification motors (totally enclosed fan cooled - continuously rated) and special belt guards which channel cool air over the pump to maximise reliability and efficiency.

Maximum working pressure on all these quality units is 150 psi and every machine features automatic on/off pressure switch control and fitted filter regulator.

All models come with a full 12 months warranty. Excellent back up is ensured by our comprehensive SIP service agent network.

**Anti vibration mounts must be used on all stationary compressors.**



| MODEL                        | AS2.5HP/50   | AS2.5HP/100  | AS3HP/50     | AS3HP/100    | AS3HP/150     | AS3HP/200    |
|------------------------------|--------------|--------------|--------------|--------------|---------------|--------------|
| ITEM NO                      | 02031 (1 PH) | 02032 (1 PH) | 02025 (1 PH) | 02045 (1 PH) | 02030 (1 PH)  | 02037 (1 PH) |
| PISTON DISP. L/MIN           | 300          | 300          | 400          | 400          | 400           | 400          |
| PISTON DISP. CFM             | 10.5         | 10.5         | 14           | 14           | 14            | 14           |
| F.A.D. L/MIN                 | 200          | 200          | 255          | 255          | 255           | 255          |
| F.A.D. CFM                   | 7.0          | 7.0          | 9.0          | 9.0          | 9.0           | 9.0          |
| HP                           | 2.5          | 2.5          | 3            | 3            | 3             | 3            |
| PHASE                        | 1 - 13A      | 1 - 13A      | 1 - 15A      | 1 - 15A      | 1 - 15A       | 1 - 15A      |
| R.P.M                        | 1450         | 1450         | 1420         | 1420         | 1420          | 1420         |
| NO. CYLINDERS                | 2            | 2            | 2            | 2            | 2             | 2            |
| NO. STAGES                   | 1            | 1            | 1            | 1            | 1             | 1            |
| MAX. PRESSURE BAR            | 10.5         | 10.5         | 10.5         | 10.5         | 10.5          | 10.5         |
| MAX. PRESSURE PSI            | 150          | 150          | 150          | 150          | 150           | 150          |
| RECEIVER CAPACITY LITRES     | 50           | 100          | 50           | 100          | 150           | 200          |
| PACKED DIMENSIONS (HxWxL) MM | 770x420x850  | 850x420x1180 | 740x390x930  | 800x390x1070 | 1050x435x1380 | 110x450x1500 |
| WEIGHT KGS                   | 49           | 68           | 52           | 69           | 77            | 96           |