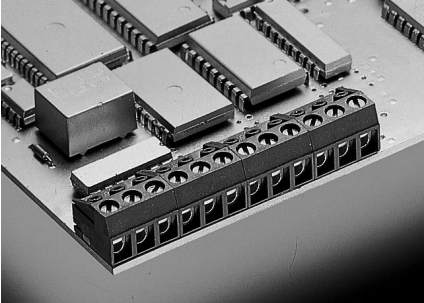
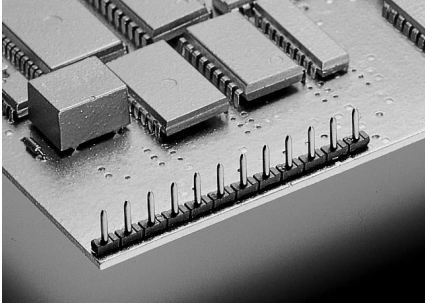
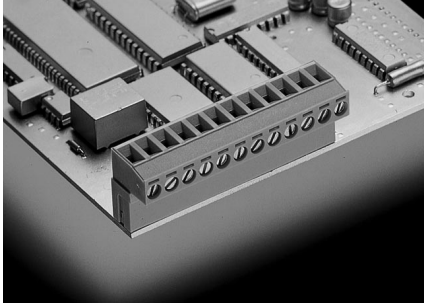
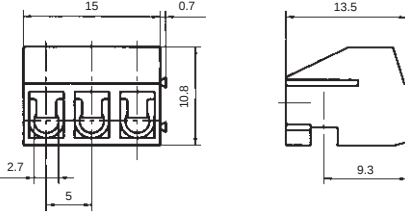
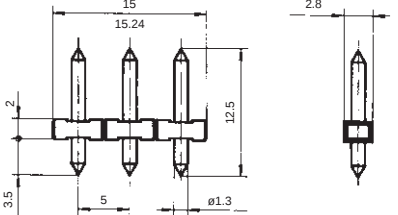
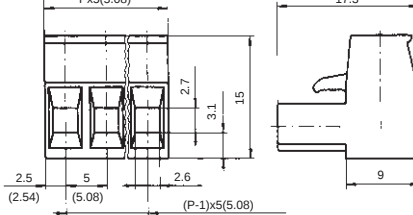


Plug-in 130 Series	Plug-in PIN-strip for 130 Series	In-line 950 Series
● Plug-in solution at low cost ● 5mm pitch ● Modular interlocking construction 	● Vertical mounting ● 5mm pitch 	● Plug-in headers ● 5.08mm pitch ● Rising clamp mechanism 
Part number 20.130/** Number of poles 2-12 poles **Insert required No. of poles	Part number 20.130/PS Number of poles Strips of 24	Part number 21.950/** Number of poles 2-24 poles **Insert required No. of poles
Ratings		
   UL 1059 CSA 22.2 No.158 DIN VDE 0627 Rated voltage 300 V 300 V 250 V Rated current 10 A 10 A 10 A (T60) Wire size AWG 22-14 AWG 22-14 1.5mm ² Rating impulse voltage/dirt level 4.0 kV/3 Rated torque/screw size 0.4 Nm/M2.6	   UL 1059 CSA 22.2 No.158 DIN VDE 0627 Rated voltage 300 V 300 V 250 V Rated current 10 A 10 A 10 A (T60) Rating impulse voltage/dirt level 4.0 kV/3	   UL 1059 CSA 22.2 No.158 DIN VDE 0627 Rated voltage 300 V 300 V 250 V Rated current 15 A 15 A 12 A (T60) Wire size AWG 22-12 AWG 22-12 2.5mm ² Rating impulse voltage/dirt level 4.0 kV/3 Rated torque/screw size 0.5 Nm/M3
Maximum rated cross section		
Single wire (solid) 1.5mm ² Stranded wire (flexible) 1.0mm ² Stranded wire with Ferrules 1.0mm ²		Single wire (solid) 2.5mm ² Stranded wire (flexible) 2.5mm ² Stranded wire with Ferrules 2.5mm ²
Materials		
Insulating material PA Flammability class UL94 V-0 Temperature range -30°C/+105°C Terminal block CuZn Wire guard CuBe Colour Grey RAL 7016	Insulating material PA Flammability class UL94 V-0 Temperature range -30°C/+105°C Contact PIN CuZn Colour Black RAL 9011	Insulating material PA Flammability class UL94 V-0 Temperature range -30°C/+105°C Terminal block CuZn Contact CuSn Colour Green RAL 6018
Dimensions		
Spacing 5.0mm Stripped length 6.0mm 	Spacing 5.0mm PCB hole diameter 1.5mm 	Spacing 5.08mm Stripped length 6.0mm 
Options: ● 10.0mm PIN pitch ● Printed terminals	Options: ● 10.0mm PIN pitch ● Horizontal mounts	Options: ● 5.0mm, 7.62mm PIN pitch ● Printed terminals ● Coding