
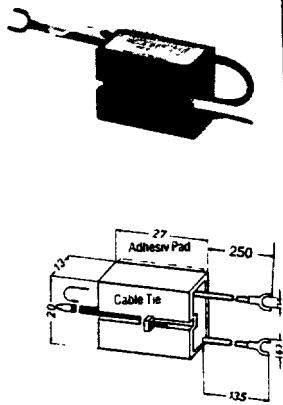




TRANSIENT SUPPRESSORS

Order Code 178-704, 178-705

Farnell
Technical
Data
Service

ORDER CODE	178-704	178-705		
Illustration	Universal RC-Suppressor RC-A 	RC-Module in „piggy-back“ housing HRC 		
		- Snaps onto DIN rail - Contactor snaps onto suppressor housing - Fits between the contactor and DIN-rail without losing the contactor DIN fixing. - flexible leads with spade termination for direct connection to contactor.		
	Type/Part No.	Type/Part-No.	RC-combination	Coil Rating (VA)
Nominal voltage AC DC 250 V~ 630 V=			1 μ F 100 Ω	10 VA
			1,2 μ F 22 Ω	15 VA
	RC-A 022/220 20 002	HRC 1-022/220 20 101	0,22 μ F 220 Ω	15 VA
General Data	Housing: Lexan, flame retardent, black, encapsulated Capacitors: metallised plastic foil capacitors to DIN standards, AC voltage resistant.		Potting compound PU 730 Resistors: Carbon resistors, wire-wound resistors.	
			Temperature range: -20° C...+70° C	

Farnell Electronic Components Limited

Sales (0532) 636311, Technical (0532) 799123, Dateline (0532) 310160, Fax (0532) 633411, Telex 55147