


C-174044

(NUMBER)







METRIC



DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

REV. 10/83

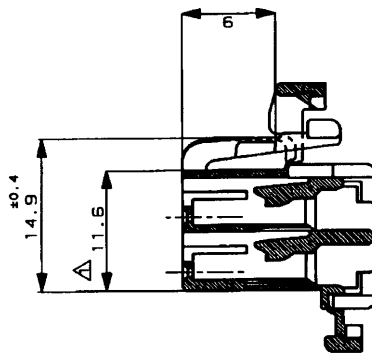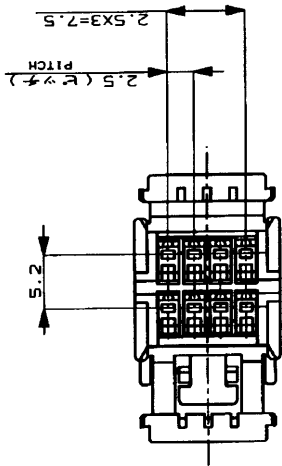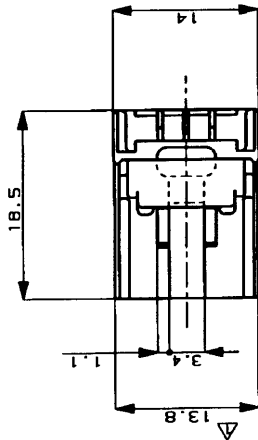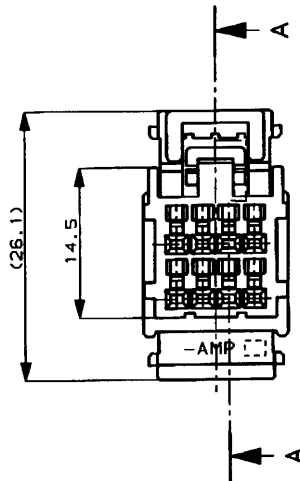

断面 A-A
SECT.

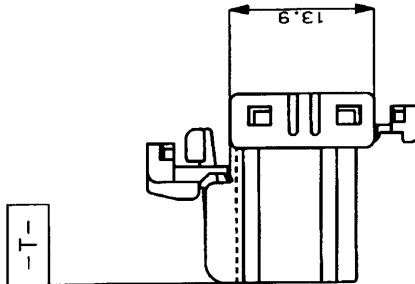

二重ロック時
DOUBLE LOCKED

- △ -T- 面より 2mm の範囲で測定。
- 2 通用品規格番号 108-5244
- 3 通用品取扱説明書番号 411-5883
- 4 通用品子型番 173681, 175180
- △ TO BE MEASURED WITHIN 2mm FROM
- 2 APPLICABLE PRODUCT SPEC. NO. 108-5244
- 3 APPLICABLE INSTRUCTION SHEET NO. 411-5883
- 4 APPLICABLE CONTACT P/N 173681, 175180

D2	ADDED	-5	FJ00-2181-99	K1	MT	DEC
D1	追加	-1	FJ00-2063-99	ES	MT	DEC
D	変更	FJ00-0962-94	YK	KO	YK	DEC
C	追加	ADDED	J-12509	K.A.	M.O	DEC
B	変更	J-10633	K.A.	Y.M	DEC	DEC
A	変更		K.A.	Y.M	DEC	DEC
O	作成		C.T	Y.M	DEC	DEC
LTR	REVISION RECORD	DR	CHK	DATE	CHK	DATE

Copyright ©1988年
AMP (Japan) LTD.
ALL RIGHTS RESERVED.

製造 (INSULATION DIA.)
mm
材料 (MATERIAL)
PBT
DR. 3/21/87 DE. B. Oguma
CHK. 3/21/88 APP. J. Matsuda

SIZE	LOG	番号 (NUMBER)
A3 J		C-174044
尺度 (SCALE)	REV.	SHEET
2-1	D2	1 OF 1

青 (BLUE)	174044-5
自然色 (NATURAL)	174044-1
黒 (BLACK)	174044-2
色 (COLOR)	製品型番 (PART NO.)


AMP
AMP (JAPAN), LTD.
Tokyo, Japan

8 POS. PLUG H56...040 SERIES MULTI-LOCK CONNECTOR
8極 プラグハウジング, .040シリーズ マルチロック コネクタ

CUSTOMER DRAWING 参考図面

3191734

o/c
319-1734

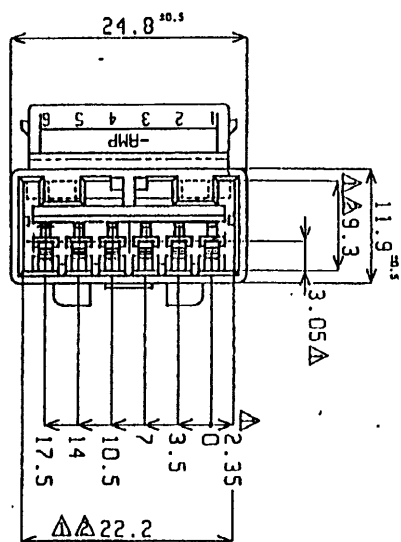

注、 $\triangle$ $\square$ 面より2面の範囲で測定。

- △ 相三ハカジツト示定の原簿を提出して提出すること。
3 内添するタメコソククト型番173633, 173645。
4 嵌合相三ハカジツト型番174923。

NOTE


Δ MUST BE KEPT BETWEEN -A- AND 2.

TO BE MATED WITH THE PLUG HSG SMOOTHLY.

3 APPLIED TAB. CONTACT P/N: 173633, 173645

4. APPLIED PLUG

HS6 PN; 174923, etc.

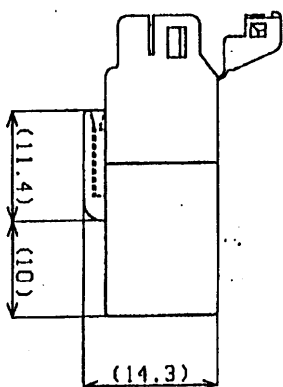

BLACK	774930-2
WHITE	1-174930-1
BROWN	174930-5
YELLOW	174930-7
GRAY	174930-6
WHITE	174930-1
白	6 Pos Cap Housing 6 1/2" x 7/8" x 3/8"
色 (Color)	名称 (Name)
	型号 (P/N)

3/9-209C

[illegible]

AMF-J 030-2
REV 0 B3


Customer Name: 姓名:

319 2179

PRINT DIST

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

METRIC



3rd ANGLE PROJECTION

NUMBER

C-175783