



HANDWHEELS

TYPE PATTERN  **B** **C** **D** **E** **F** THREAD OR BORE LENGTH OF MALE THREAD



Heavy duty handwheel

RENKOL 5



Gloss finish duroplast








FEMALE	141	50	29	25	17	12	6	8	10	12
Aluminium insert	141/5	63	35	30	22	13	8	10	12	
	141/2	75	44	35	27	17	10	12	16	
	141/3	100	54	47	36	18	10	12	16	20
MALE	141/M	50	29	25	17	12	M8			25 40
Plated steel insert	141/5/M	63	35	30	22	13	M10			25 40
	141/M	75	44	35	27	17	M12			25 40



Gloss finish duroplast



FEMALE	320	31	17	21	8	9	5	6	8	
Aluminium insert	321	44	20	29	10	10	8	10	12	
	322	44	17	23	8	9	6	8	10	
	323	63	27	25	15	12	8	10	12	
	324	76	29	31	16	13	8	10	12	
	325	87	33	36	20	13	10	12		
MALE	320/M	31	17	21	8	9	M5 M6 M8			12 20
Plated steel insert	321/M	44	20	29	10	10	M6 M8 M10			12 20
	322/M	44	17	23	8	9	M6 M8 M10			12 20
	323/M	63	27	25	15	12	M10 M12			20 30
THREADED RIGHT THROUGH	320/T	31	17	21	8	9	M6 M8			
	321/T	44	20	29	10	10	M6 M8 M10			
	322/T	44	17	23	8	9	M6 M8 M10			
	323/T	63	27	25	15	12	M10 M12			
	324/T	76	29	31	16	13	M10 M12			

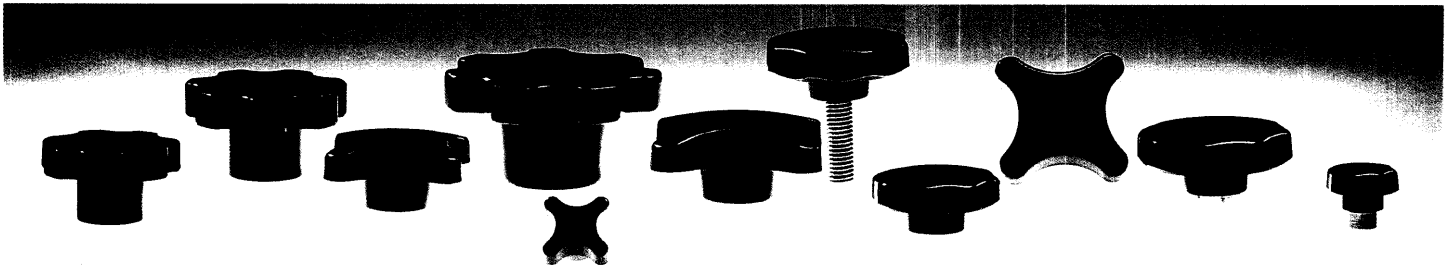

TYPE PATTERN  **B** **C** **D** **E** **F** THREAD OR BORE LENGTH OF MALE THREAD

Most patterns are available with imperial threads (Whitworth) or bores. Non standard thread diameters, lengths, insert materials and other modifications are available for minimum quantities. All dimensions in mm and are approximate