


713 9470 .




HCFE.

Oil circulation sights

- Special transparent polyamide **technopolymer**. Resistant to solvents, oils with additives, greases, acids and alkali. Avoid contact with alcohol and any detergents containing alcohol.
- NBR synthetic rubber **packing ring**.
- Maximum **working temperature** 110° C at normal pressure.

A moderate torque (from 5 to 15 Nm depending on diameter) is recommended when screwing oil circulation sight so as to guarantee optimal tightness without any elastic deformation.




HE.

Oil indicators push fit

- Transparent high mechanical resistance **polycarbonate**. Resistant to acids, alkali, greases and oils. Not suitable for use with oils with additives and solvents.
- White lacquered aluminium **contrast screen** with red level line.
- NBR synthetic rubber OR **packing ring**.
- Maximum **working temperature** 100° C.

Suitable ribbing makes installation possible even when there is limited pressure in the tank.
Chamfer hole 1x45° and grease outside surface of OR slightly to make assembly easier.

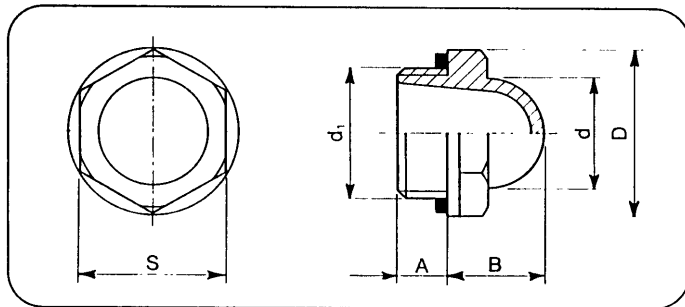


Elesa Standard		Main dimensions						Weight
Code	Description	d ₁	A	B	D	d	s	grams

108511	HCFE.12	3/8 Gas	8	13	22	15	19	4
109011	HCFE.15	1/2 Gas	10	16	26	19	22	5
110011	HCFE.20	3/4 Gas	10	20	31	25	27	8
111011	HCFE.24	1 Gas	10	24	42	31	36	18
111111	HCFE.30	1 1/4 Gas	12	27	47	38	41	22

7137746
7137758
7137760
7137771
—

7139470
7139482
7139494
7139500
7139512
—
—

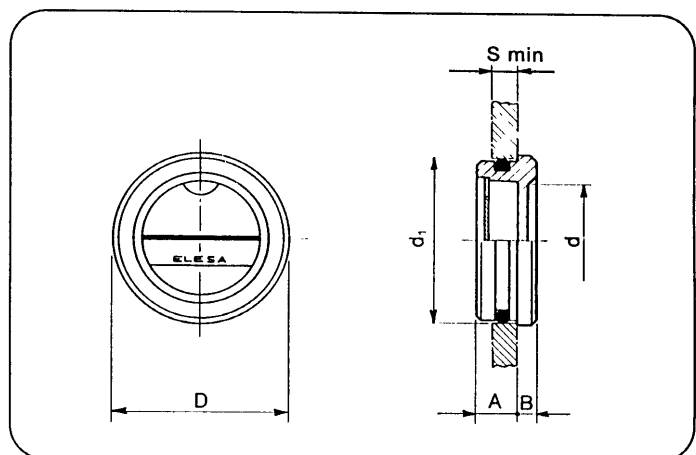

Elesa Standard		Main dimensions						Weight
Code	Description	d ₁	A	B	D	d	S _{min}	grams

114011	HE. 17	Ø17H11 ^{+0.110} / ₀	7	3	18	9	5	2
115011	HE. 20	Ø20H11 ^{+0.130} / ₀	7	3	21	12	6	3
116011	HE. 26	Ø26H11 ^{+0.130} / ₀	7	3	28	17	6	5
117011	HE. 30	Ø30H11 ^{+0.130} / ₀	8	4	32	20	7	7
118011	HE. 35	Ø35H11 ^{+0.160} / ₀	9	4	38	25	8	10
119011	HE. 40	Ø40H11 ^{+0.160} / ₀	10	4	43	28	9	13
120011	HE. 45	Ø45H11 ^{+0.160} / ₀	11	5	47	32	9	18