



V_BSERIES

GENERAL PURPOSE FILTERS



INTRODUCTIONS

1. Designed as general purpose filter providing effective EMI suppression.
2. All part numbers are UL recognized, CSA certified and VDE approved.


COMPONENTS

PART NO.	L (mH)	Cx (uF)	Cy (pF)	R (Ohm)
03VBAG5	1.3	0.033	2200	-
03VBAW5				
05VBAG5	0.6			
05VBAW5				
10VBAG5				
10VBAW5	0.8			
10VBAS5				
20VBAG5	0.7	0.1	4700	1M
20VBAS5				
30VBGS5	0.6			

INSERTION LOSS (TYPICAL)

COMMON MODE (L-G) IN 50 OHM SYSTEM						
CURRENT RATING	FREQUENCY-MHz					
	.15	.50	1.0	5.0	10	30
3A	20	30	38	45	45	
5A	10	20	28	45	45	50
10A	13	20	22	35	35	50
20A	13	20	25	40	45	48
30A	8	21	26	34	37	38
DIFFERENTIAL MODE (L-L) IN 50 OHM SYSTEM						
3A	2	8	40	35	30	
5A	2	8	30	35	30	
10A	2	8	30	30	30	
20A	2	8	35	35	40	
30A	10	15	45	50	42	

ELECTRICAL SCHEMATIC

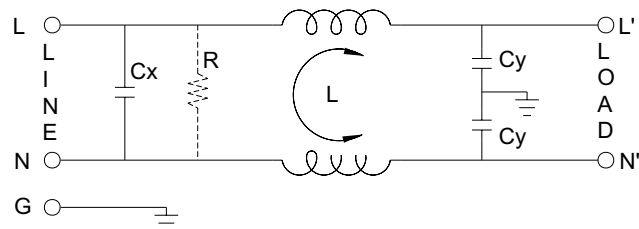

-----BLEEDER RESISTOR FOR PART NUMBER 30VBGS5 ONLY

SPECIFICATIONS


1. Maximum leakage current each
line-to-ground @ 115VAC 60Hz: 0.20mA
0.40mA (30VBGS5)
@ 250VAC 60Hz: 0.40mA
0.80mA (30VBGS5)
2. Hipot rating (one minute)
line-to-ground: 2250VDC
line-to-line: 1450VDC
3. Operating frequency: 50/60Hz
4. Rated voltage: 115/250VAC

SERIES DIMENSIONS

PAR NO.	DIMENSIONS IN INCHES/mm				
	A	B	C	D	E
03VBAG5	2.15	1.77 44.9	0.65 16.5	2.13 54.1	2.54 64.5
	54.61				
03VBAW5	0.96		0.79 20.0		
	24.38				
05VBAG5	2.54		1.16 29.5		
	64.52				
05VBAW5	1.33		2.38 60.5		
	33.78				
* 10VBAG5	2.54	1.52 38.6			
	64.52				
* 10VBAW5	1.33	3.40 86.36			
	33.78				
* 10VBAS5	3.10	1.52 38.6			
	78.74				
• 20VBAG5	3.25	1.52 38.6	3.75 95.25	4.14 105.2	
	82.55				
• 20VBAS5	3.37	1.52 38.6	3.75 95.25	4.14 105.2	
	85.6				
30VBGS5	5.25	3.40 86.36	1.52 38.6	3.75 95.25	4.14 105.2
	133.4				

- * VDE approved to 8A/250VAC
- VDE approved to 16A/250VAC


MINIMUM INSERTION LOSS IN dB

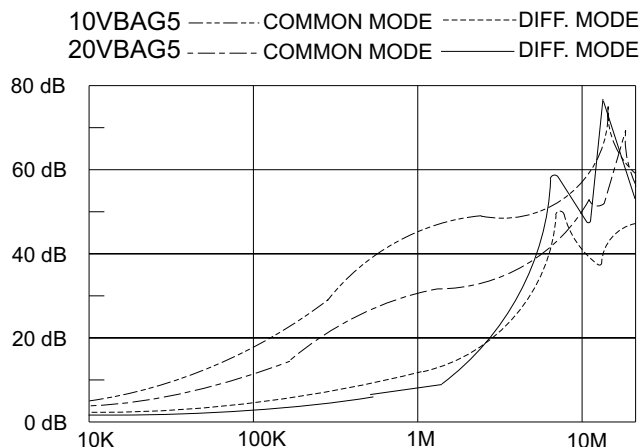

MECHANICAL CONSTRUCTION




AW5

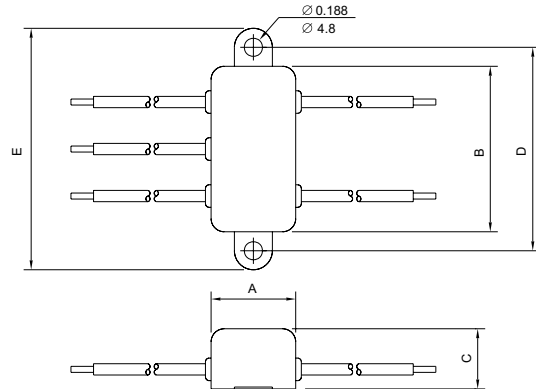


ALL WIRE LEADS 4.0" LONG MIN.




AG5

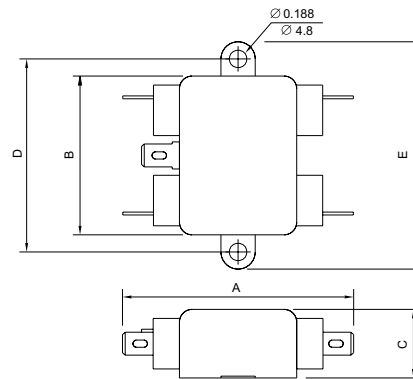

AS5

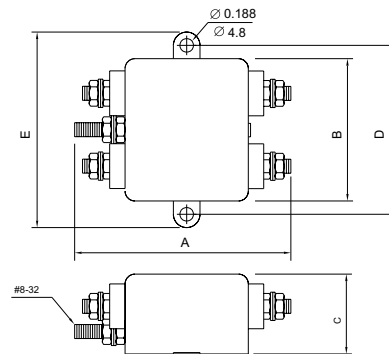

GS5



UNIT: $\frac{\text{INCH}}{\text{mm}}$