


TECHNICAL SPECIFICATIONS

Material
Bead: Boro Silicate Sintered Glass
Tag: Phosphor Bronze BS 384 Solder Tinned


GLASS BEAD

COEFF	DENSITY	VISCOSITY POISE °C			LOG (OHM.CM)			DIELECTRIC PROPERTIES	
TERM. EXPN × 10 ⁻⁶ /°C	g/cc	14.6	13	7.6	TR	DC. RESISTIVITY		AT 1 MHZ AT 20°C	
4.94	2.27	10	10	10	100	250°C	350°C	CONST	LOSS ANGLE
		475	515	719	365	10.1	8.2	5.7	0.003

NOTE: COEFFICIENT OF EXPANSION IS QUOTED FOR THE RANGE 50°-300°C

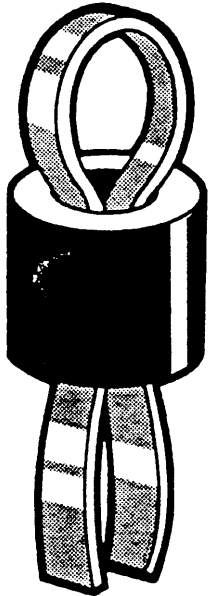

Dimensions	TYPE 100 (Large)		TYPE 200 (Small)		TYPE 300 (Long legged)	
	mm	inches	mm	inches	mm	inches
A	2.84-3.10	0.112-0.122	3.05-3.30	0.120-0.130	2.84-3.10	0.112-0.122
B	2.03-2.16	0.080-0.085	1.30-1.50	0.051-0.059	2.03-2.16	0.080-0.085
C	2.87-3.12	0.113-0.123	2.21-2.47	0.087-0.097	2.87-3.12	0.113-0.123
D	1.50-1.75	0.059-0.069	1.07-1.32	0.042-0.052	1.50-1.75	0.059-0.069
E	0.8	0.032	0.5	0.020	0.8	0.032
F	2.78	7/64	2.78	7/64	3.57	9/64
Board Size	1.59	1/16	1.59	1/16	2.38	3/32
Hole Size	1.32	0.052	1.0	0.40	1.32	0.052
Hole Centre	3.20	0.125	2.5	0.100	3.20	0.125
Order Code						
White	101		201		301	
Yellow	102		202		302	
Black	103		203		303	
Brown	104		204		304	
Blue	105		205		305	
Pink	106		206		306	



HOW TO ORDER

When ordering, please refer to the order code above which will determine the type and colour required, i.e. 1.59mm (1/16") board with 1.32mm (0.052") hole in black, please quote code 103.

MoD approved

Your local agent is:

ESTABLISHED 1790

WILLIAM HUGHES
LIMITED

Deane House, 27 Greenwood Place, London NW5 1NN England. Tel: 01 485 5574 Telex: 264200