

INTEGRATED CONNECTOR MODULES

Gigabit belStick™ with LEDs

BM02830


- Four port shielded RJ-45 connector with integrated Gigabit Ethernet magnetics
- Compatible with a variety of Gigabit Ethernet transceiver ICs and 10/100Base-TX transceiver ICs
- Operating temperature 0° to +70° C
- Storage temperature -40° to +85° C
- Complies with IEEE 802.3ab standards and all Gigabit Ethernet specifications
- Integrated design conserves valuable board space
- Minimum interwinding breakdown voltage of 1500 Vrms
- Adaptable, modular design provides higher reliability

ELECTRICAL SPECIFICATIONS AT 25° C

Insertion Loss dB max		Return Loss dB min		Common to Differential Mode Rejection dB min	Common to Common Mode Rejection dB min	Crosstalk dB min	Hipot Vrms min
0.1MHz to 100MHz	100MHz to 125MHz	0.5MHz to 40MHz	40MHz to 100MHz	100KHz to 100MHz	100KHz to 100MHz		
-0.8	-1.2	-18	-12 + 20 log (f/80 MHz)	-35	-30	-33 + 20 log (f/100MHz)	1500

SCHEMATIC

0826-1A4T-23
0826-1B4T-23
0826-1C4T-23
0826-1D4T-23
0826-1E4T-23
0826-1G4T-23
0826-1K4T-23
0826-1L4T-23
0826-1X4T-23
0826-1Y4T-23

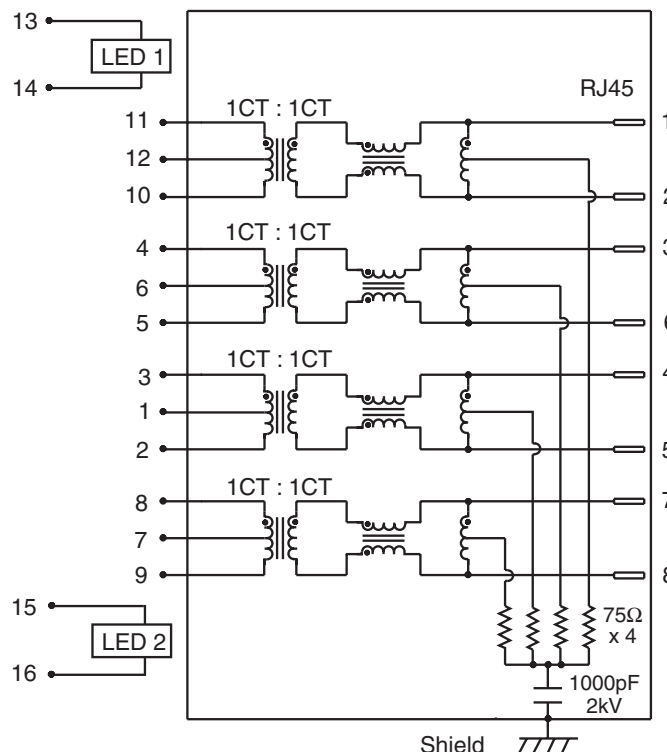

See chart on page 2 for LED colors and polarity.



INTEGRATED CONNECTOR MODULES

Gigabit belStick™ with LEDs

BM02830

LED COLORS AND POLARITY

Part Number	LED 1				LED 2			
	Color		Polarity		Color		Polarity	
			Pin 13	Pin 14			Pin 15	Pin 16
0826-1A4T-23		Yellow	-	+		Green	-	+
0826-1B4T-23	Bi-color	Green	-	+	Bi-color	Green	-	+
		Orange	+	-		Orange	+	-
0826-1C4T-23	Bi-color	Green	-	+	Bi-color	Green	-	+
		Amber	+	-		Amber	+	-
0826-1D4T-23		Green	-	+		Yellow	-	+
0826-1E4T-23		Green	-	+	Bi-color	Green	-	+
						Orange	+	-
0826-1G4T-23		Green	-	+		Green	-	+
0826-1K4T-23		Green	-	+	Bi-color	Green	-	+
						Yellow	+	-
0826-1L4T-23	Bi-color	Green	-	+		Green	-	+
		Yellow	+	-				
0826-1X4T-23		Yellow	-	+	Bi-color	Green	-	+
						Orange	+	-
0826-1Y4T-23		Yellow	-	+		Yellow	-	+


INTEGRATED CONNECTOR MODULES

Gigabit belStick™ with LEDs


bel

BM02830

MECHANICAL

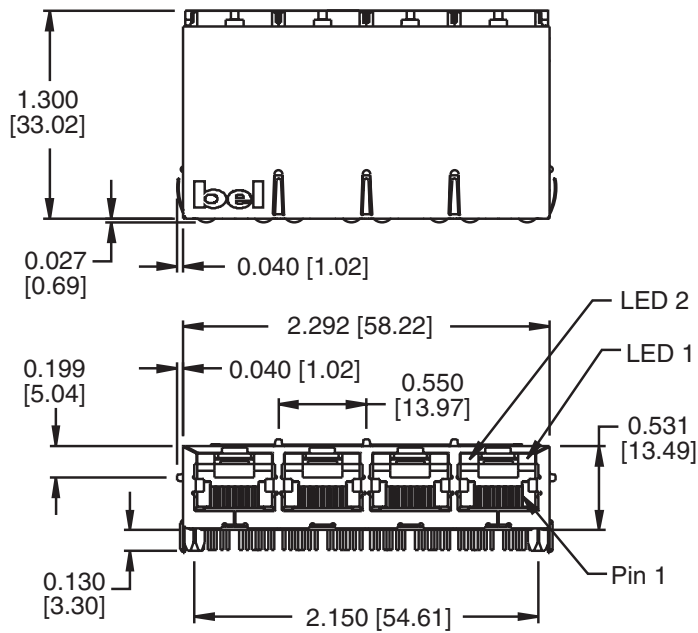

0826-1A4T-23
0826-1B4T-23
0826-1C4T-23
0826-1D4T-23
0826-1E4T-23
0826-1G4T-23
0826-1K4T-23
0826-1L4T-23
0826-1X4T-23
0826-1Y4T-23

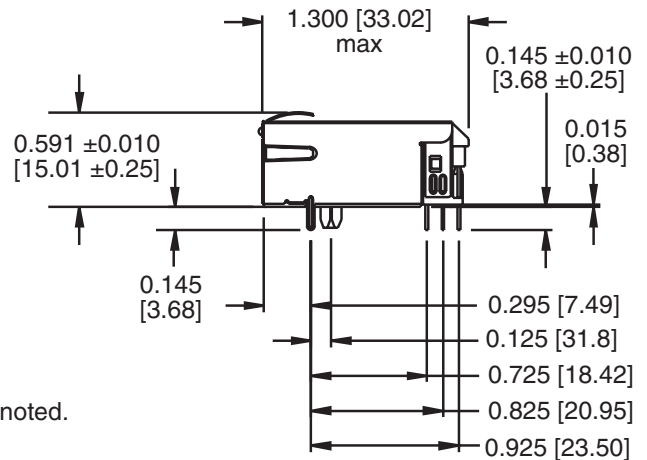

Dimensions are in inches [millimeters].
Standard dimension tolerance is ±0.010 [0.25] unless otherwise noted.


Notes

Plastic Housing	Thermoplastic, flammability rating UL 94V-0
Contacts	50 micro-inch hard gold plating
Pins	Tin-coated copper wire, DIA 0.018" [0.46]
Solderability	Per MIL Std. 202, Method 208
Metal Shield	Nickel plated copper alloy

0826-1G4T-23
0826-1L4T-23
0826-1X4T-23
0826-1Y4T-23

2.285 [58.04]
2.150 [51.64]
0.067 [1.71]
0.125 [3.17]
0.450 [11.43]
0.050 [1.27]
0.550 [13.97] pitch
4x $\varnothing 0.062$ [$\varnothing 1.57$]
2x $\varnothing 0.128$ [$\varnothing 3.25$]
0.925 [23.49]
0.825 [20.95]
0.725 [18.41]
0.080 [2.03] typ
1 2 3 4 5 6
7 8 9 10 11 12
13 14 15 16
0.100 [2.54]
0.040 [1.02]
0.040 [1.02] typ
64x $\varnothing 0.035$ [$\varnothing 0.89$]

Suggested PCB Pad Layout
Component Side View

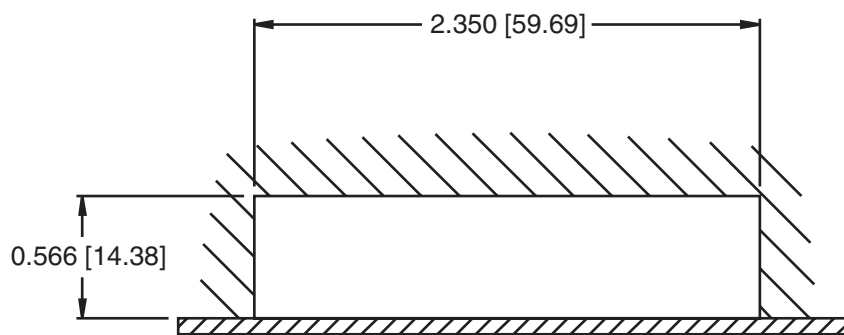

Suggested Panel Opening

