

REV.	DESCRIPTION	DATE	DESIGNED
-2	Drawing renewal	Dec.26,2000	K. Yuasa




Cover sheet for
JWPF range.

New Product

JST



Compact water-proof wire-to-wire connector,
with the use of the 025 terminals and the solid
wire-sealing rubber.



Double-leaf construction



Superior contact performance is provided by the double-leaf construction, consisting of the main leaf and the assist leaf.

Housing lances

The contact retention lances on the resilient housing allow the confirmation of contact lock-in for easy and secure insertion.

Inter-housing lock

This inter-housing lock secures the plug to the receptacle and prevents accidental disconnection. The lock protected and is not affected by external forces that might result from the routing of wires.

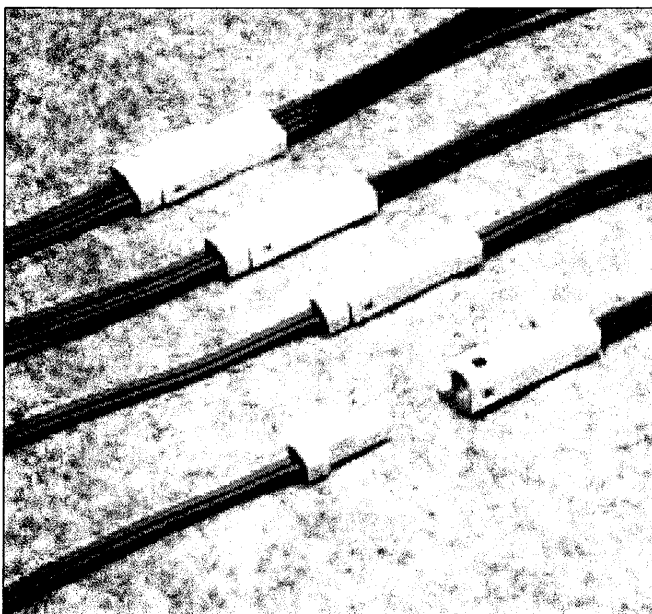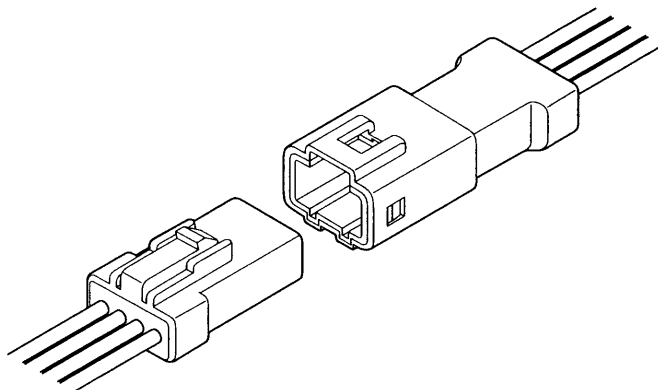

■ Specifications

- Current rating : 3.0A AC, DC
- Voltage rating : 100 V AC, DC
- Temperature : - 25 °C ~ + 85 °C (including temperature range rise in applying electrical current)
- Wires applicable : AWG #26 ~ #22
Insulation O.D. : 1.4 ~ 1.74 mm dia
- No. of circuits : 2 ~ 4 circuits

J.S.T. MFG. CO., LTD.

{URL} <http://www.jst-mfg.com>

Sales offices

Utsunomiya, Yokohama, Hachioji, Nagano, Aichi, Osaka, Kurayoshi, Hiroshima, Fukuoka in Japan and Belgium, Spain, U.K., Germany, France, Italy, U.S.A., Singapore, Thailand, Malaysia, China (Hong Kong, Shanghai), Taiwan, Korea, Australia

Engineering Centers

Osaka, Yokohama, Nagoya, Tsuyama, Kurayoshi in Japan and U.S.A., U.K., Singapore

Plants

Nishi-Kurayoshi, Kurayoshi, Misasa, In-no-sho, Tsuyama, Utsunomiya, Ooda, Oohara, Urayasu in Japan and Belgium, France, U.S.A., Indonesia

00.10-3