




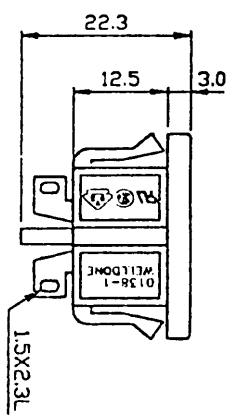


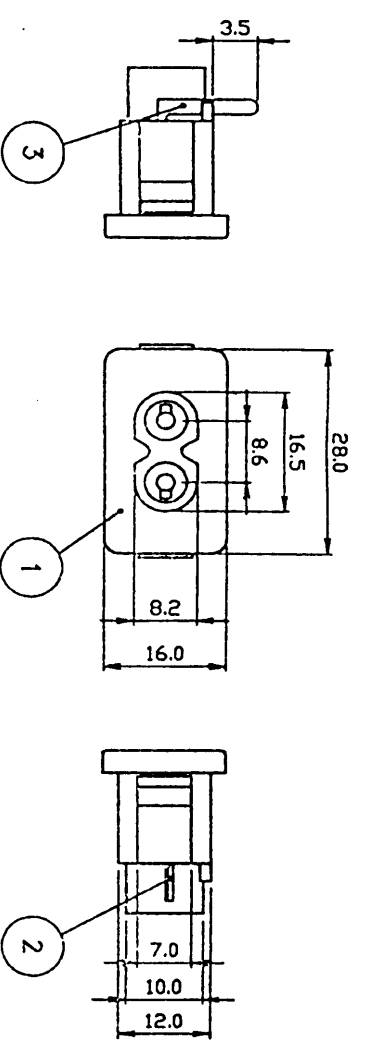

PCB LAYOUT

PANEL CUT-OUT

THICKNESS
0.8-1.3T

724-920 = 0138-1S
724-932 = 0138-1P

A: MATERIAL:

- 1. HOUSING: THERMOPLASTIC
- 2. TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:

- 1. RATING: 2.5A 250V AC
- 2. INSULATION RESISTANCE: OVER 100MΩ 500V DC
- 3. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE

C: APPROVALS:

UL, CSA, VDE, SEV, SEMKO, DEMKO, NEMKO & SETI

D: ORDERING OPTION GUIDE:

ORDER#	ITEM REQ.	TERMINAL DIFFERENCE	CODE
0138-1S	① + ②	1.5X2.3L/SOLDER TABS	-S
0138-1P	① + ③	PCB MOUNTING	-P

E: SPECIFICATION:

ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
③	T-0138-1	TERMINAL	1SET	PCB MOUNTING	COPPER ALLOY	TIN-PLATED
②	T-0138-1	TERMINAL	1SET	2.3X3.0T	COPPER ALLOY	TIN-PLATED
①	H-0138-1	HOUSING	1	SNAP-IN TYPE	THERMOPLASTIC	

名稱	AC INLET 2P SNAP-IN MOUNTING	比例	1/1
材質	PA66	單位	M/M
圖號	0138-1	校對	
編號	LSA7	設計	K.D.W/U
		06-23 '95	0-6 ±0.1 6-30 ±0.2 90-120 ±0.3

0138-1S 0138-1P 0138-1S 0138-1P