


FRD Type : FSU20B60

OUTLINE DRAWING

For Power Factor Improvement High Frequency Rectification

FEATURES

- * Fully Molded Isolation Case
- * Ultra – Fast Recovery
- * Low Forward Voltage Drop
- * Low Power Loss, High Efficiency
- * High Surge Capability

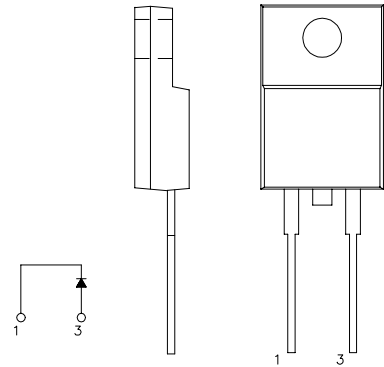

Maximum Ratings



Approx Net Weight:1.7g

Rating	Symbol	FSU20B60			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	600			V
Average Rectified Output Current	I _O	15	Tc=51℃	50 Hz Half Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	23.5			A
Surge Forward Current	I _{FSM}	160	50 Hz Half Sine Wave,1cycle Non-repetitive		A
Operating JunctionTemperature Range	T _{jw}	- 40 to + 150			℃
Storage Temperature Range	T _{stg}	- 40 to + 150			℃
Mounting torque		0.5	Recommended value		N•m


Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j = 25^{\circ}C, V_{RM} = V_{RRM}$	-	-	30	μA
Peak Forward Voltage	V_{FM}	$T_j = 25^{\circ}C, I_{FM} = 15A$	-	-	2.42	V
		$T_j = 25^{\circ}C, I_{FM} = 20A$			2.60	
Reverse Recovery Time	t_{rr}	$I_{FM} = 10A, -di/dt = 50 A/\mu s, T_a = 25^{\circ}C$	-	34	50	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	3	$^{\circ}C/W$
	$R_{th(c-f)}$	Case to Fin	-	-	1.5	


FSU_B_ OUTLINE DRAWING (Dimensions in mm)

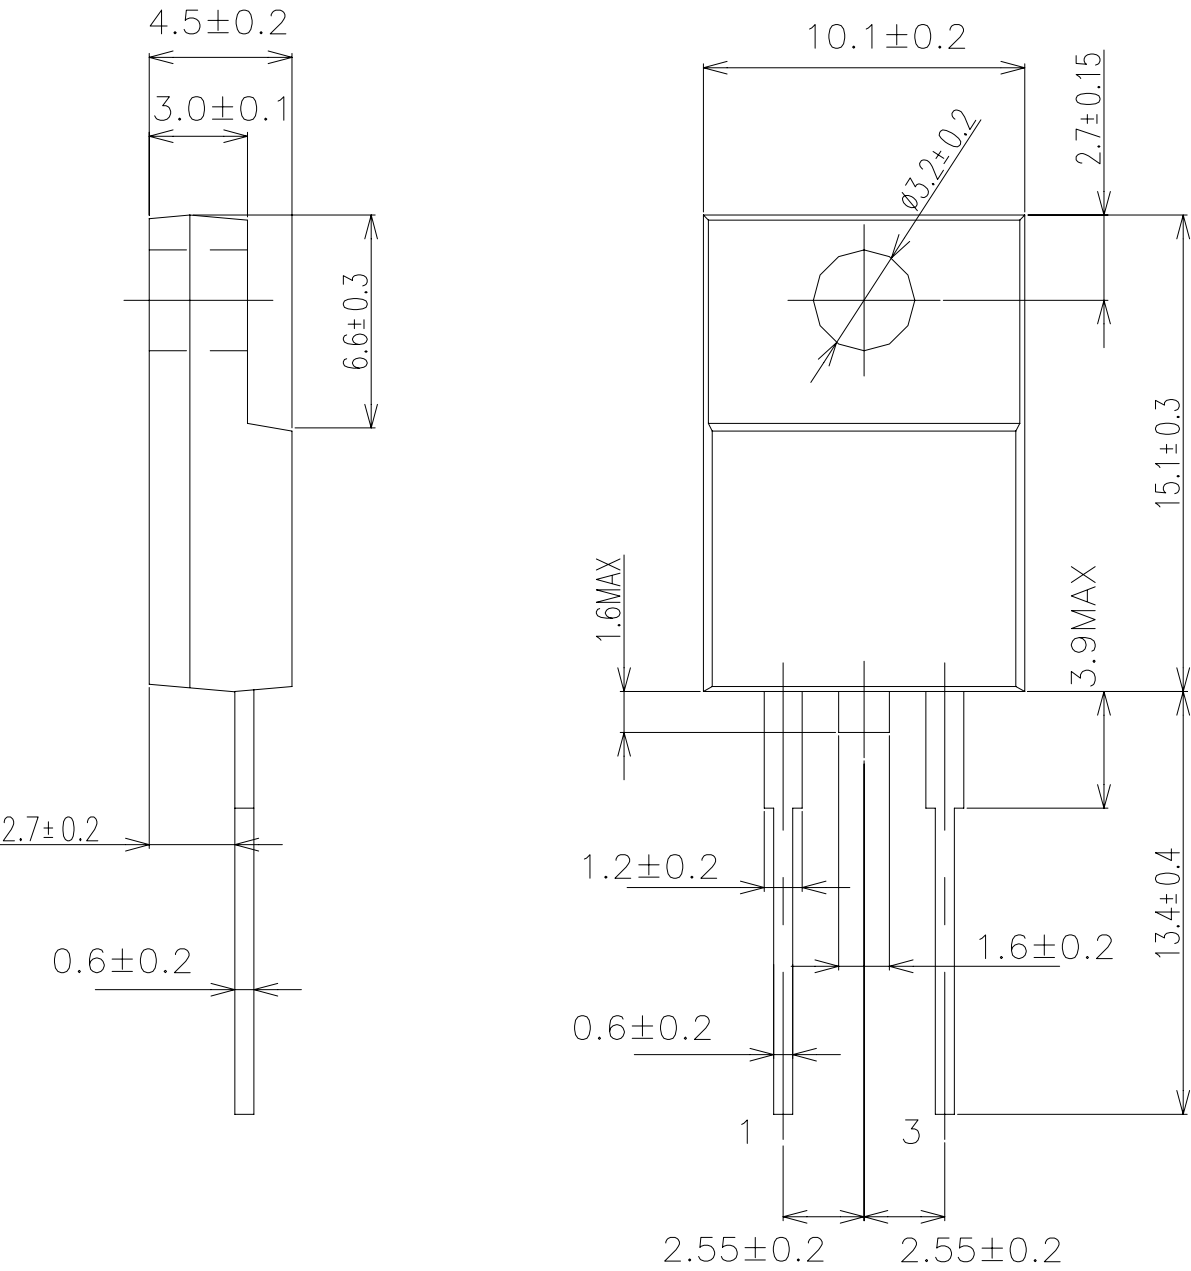


FORWARD CURRENT VS. VOLTAGE

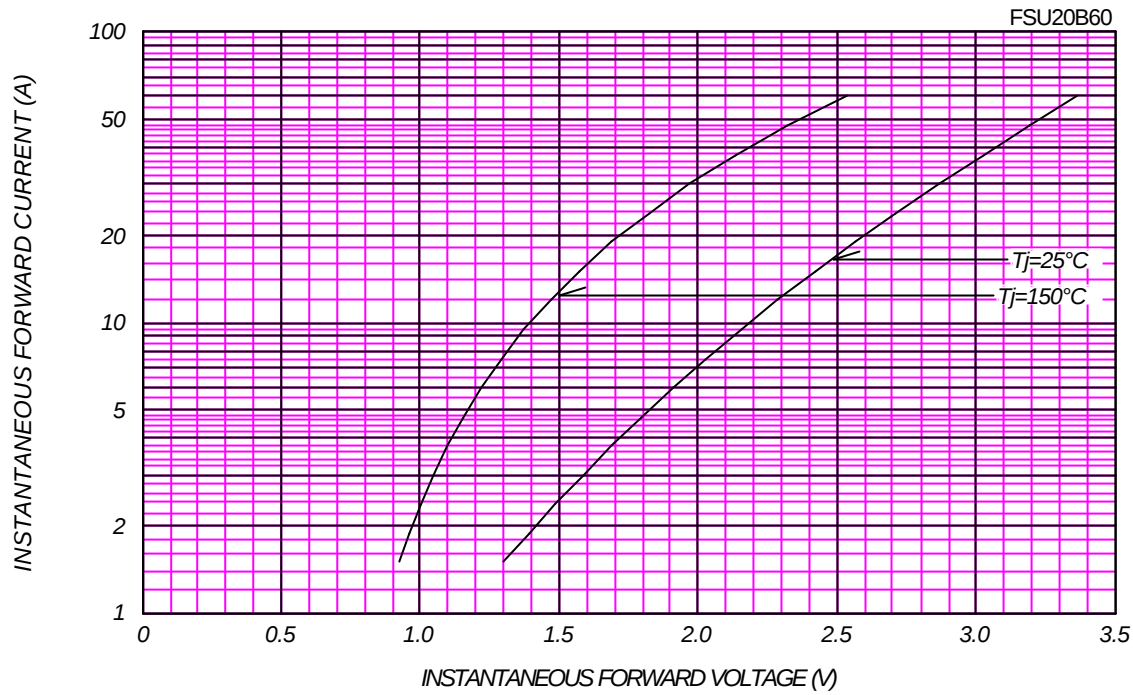


AVERAGE FORWARD POWER DISSIPATION

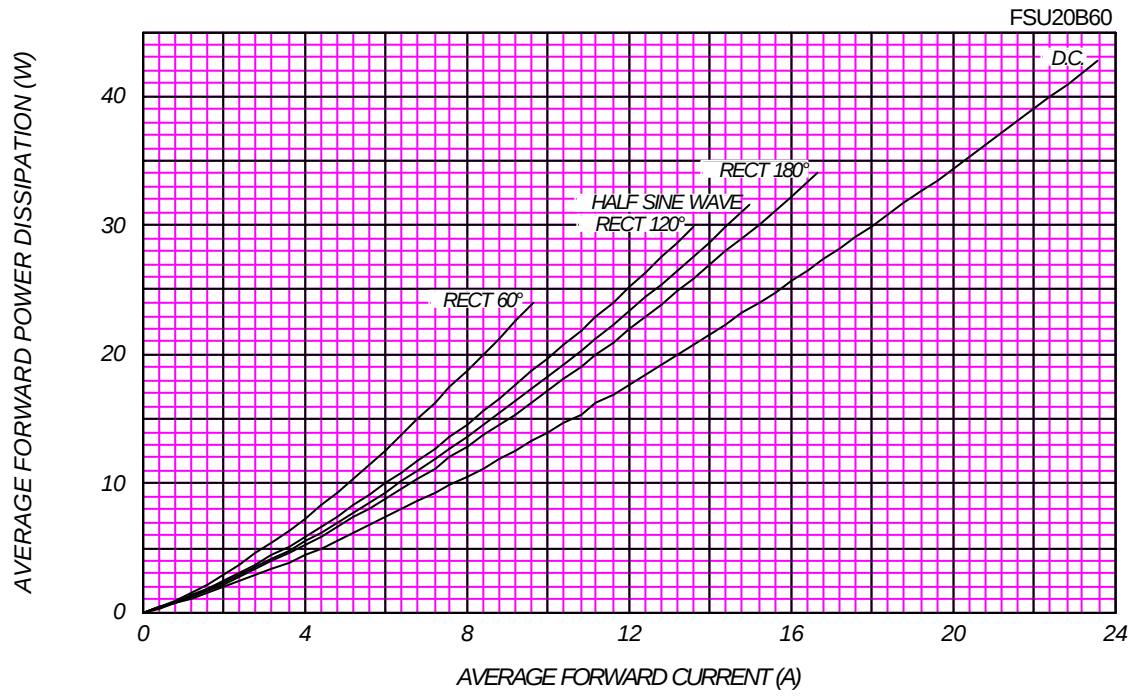




AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

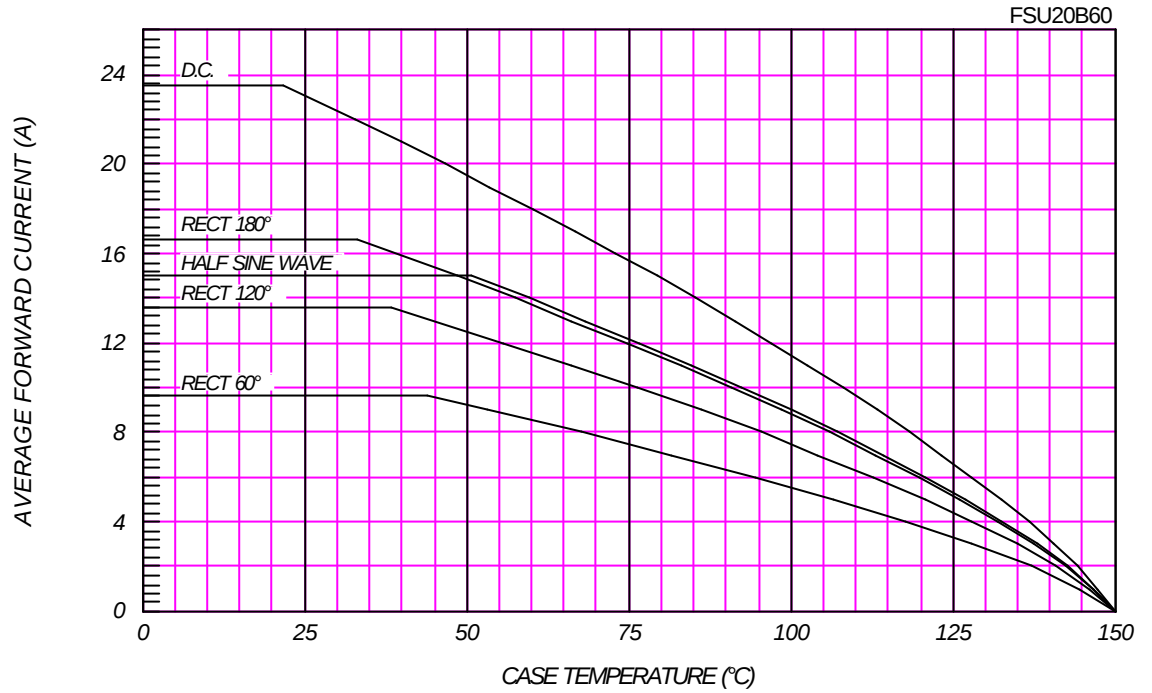

SURGE CURRENT RATINGS

$f=50\text{Hz}$, Half Sine Wave, Non-Repetitive, No Load

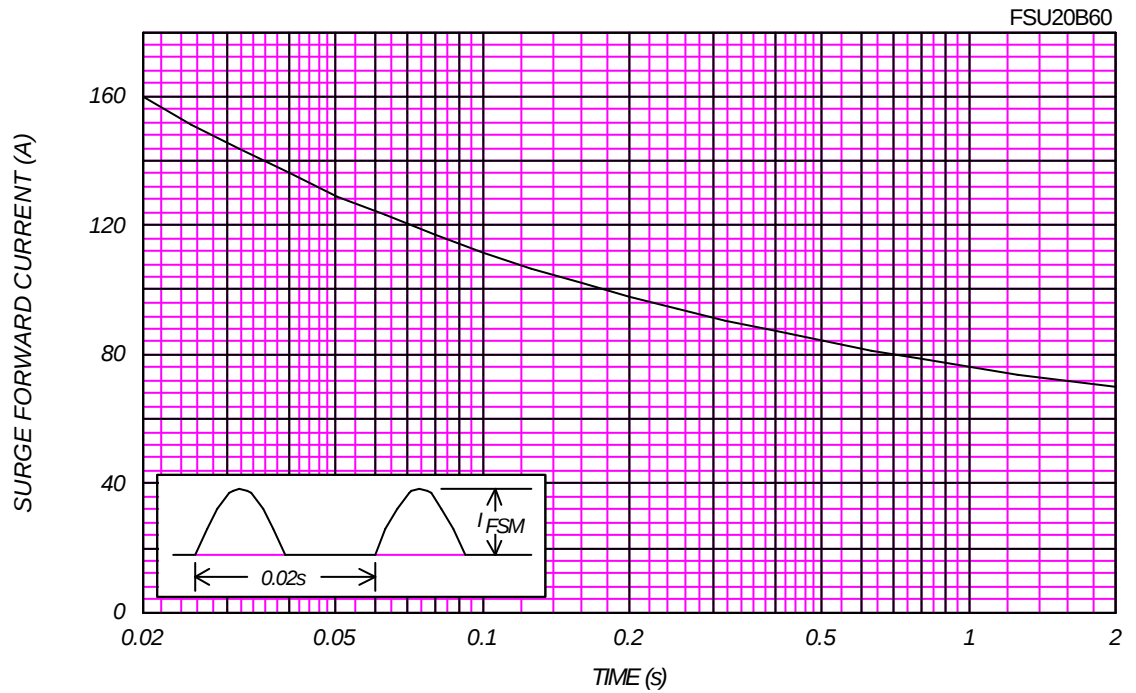

RMS SURGE CURRENT RATINGS

Ta=40°C, Non-Repetitive, No Load

FSU20B60

