

TRANSISTOR(PNP)

FEATURES

- For general amplification
- Complementary to 2SD601A

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	-45	V
V_{CEO}	Collector-Emitter Voltage	-45	V
V_{EBO}	Emitter-Base Voltage	-7	V
I_C	Collector Current -Continuous	-100	mA
P_C	Collector Power Dissipation	200	mW
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-55-150	$^{\circ}\text{C}$

SOT-23



1. BASE
2. EMITTER
3. COLLECTOR


ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\ \mu\text{A}, I_E = 0$	-45		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -2\text{mA}, I_B = 0$	-45		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\ \mu\text{A}, I_C = 0$	-7		V
Collector cut-off current	I_{CBO}	$V_{CB} = -20\text{V}, I_E = 0$		-0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -10\text{V}, I_B = 0$		-100	μA
DC current gain	h_{FE}	$V_{CE} = -10\text{V}, I_C = -2\text{mA}$	160	460	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -100\text{mA}, I_B = -10\text{mA}$		-0.5	V
Transition frequency	f_T	$V_{CE} = -10\text{V}, I_C = -1\text{mA}$ $f = 200\text{MHz}$	60		MHz
Collector output capacitance	C_{ob}	$V_{CB} = -10\text{V}, I_E = 0$ $f = 1\text{MHz}$		2.7	pF

CLASSIFICATION OF h_{FE}

Rank	Q	R	S
Range	160-260	210-340	290-460
Marking	BQ1	BR1	BS1

Typical Characteristics

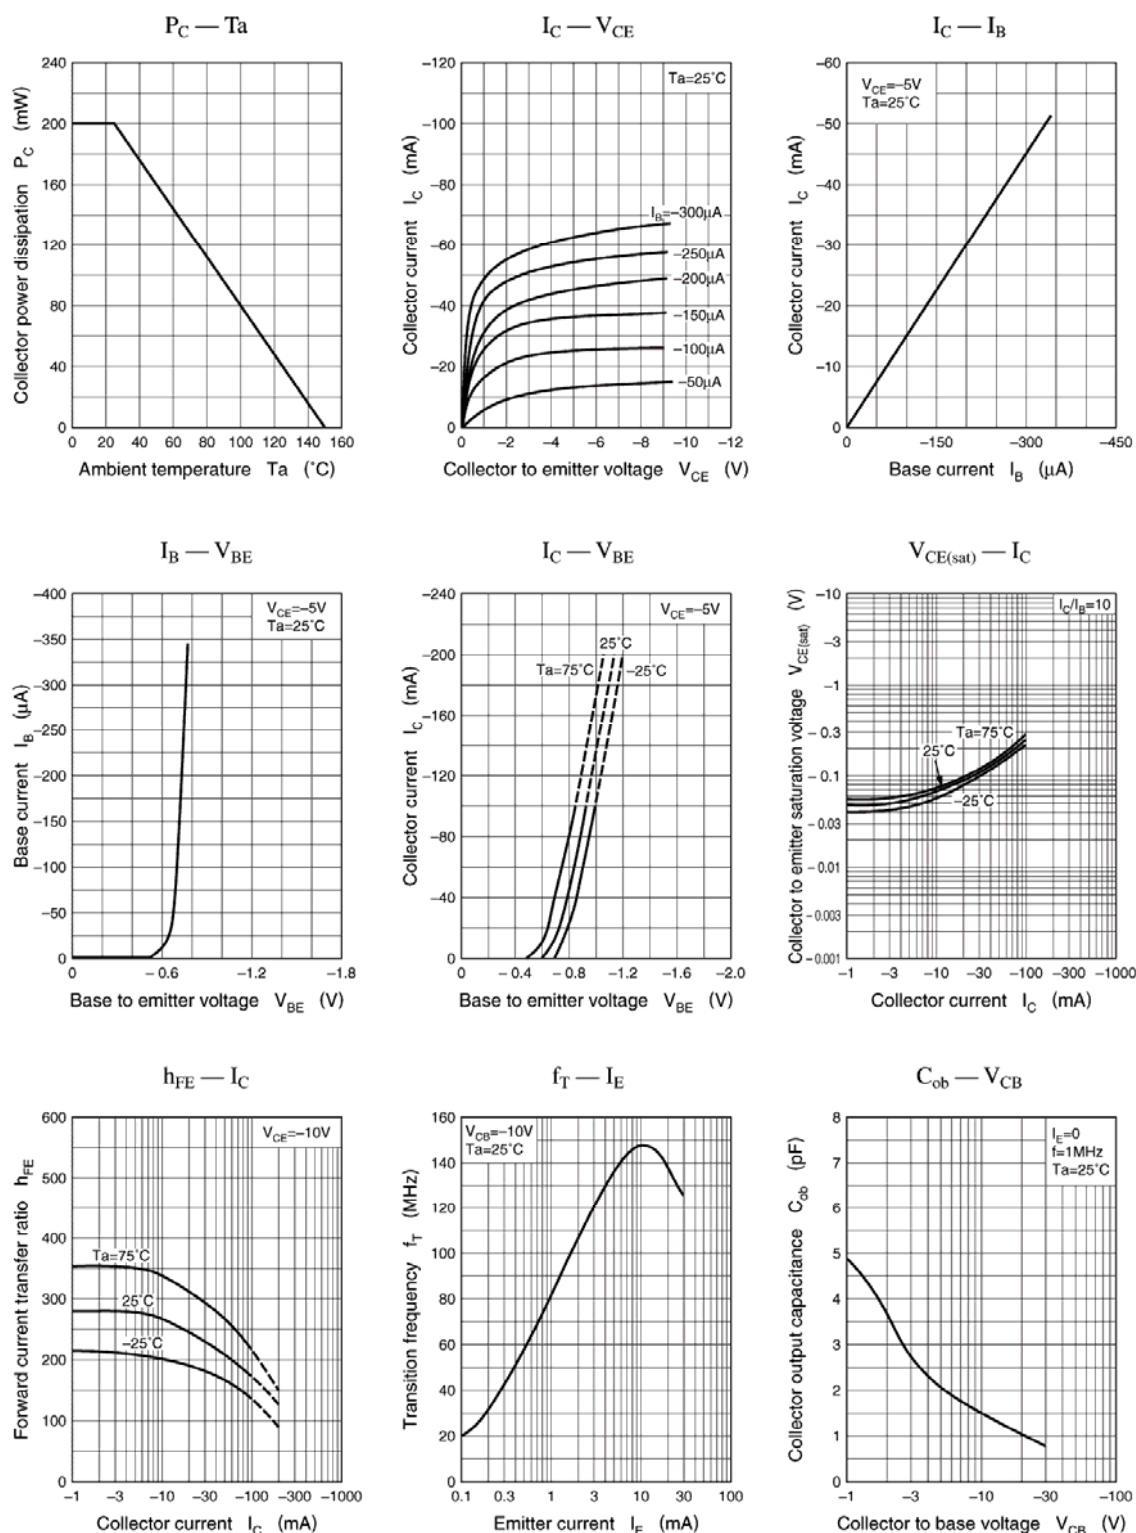

Typical Characteristics

