



2SB1260

PNP SILICON TRANSISTOR


POWER TRANSISTOR

■ DESCRIPTION

The UTC **2SB1260** is a epitaxial planar type PNP silicon transistor.

■ FEATURES

- * High breakdown voltage and high current.
 $BV_{CEO} = -80V$, $I_C = -1A$
- * Good h_{FE} linearity.
- * LOW $V_{CE(SAT)}$

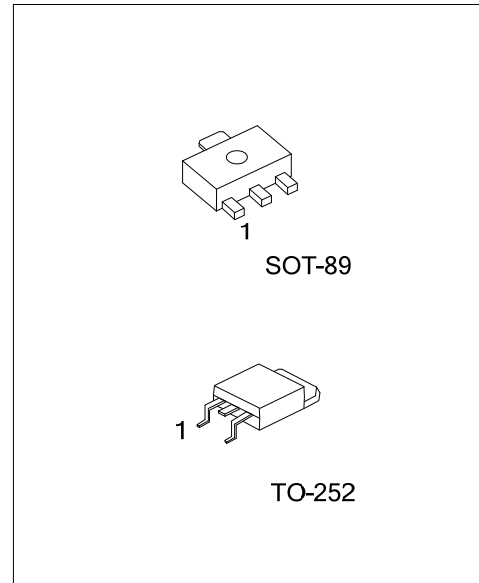

Lead-free: 2SB1260L
Halogen-free: 2SB1260G

■ ORDERING INFORMATION

Ordering Number			Package	Pin Assignment			Packing
Normal	Lead Free	Halogen Free		1	2	3	
2SB1260-x-AB3-R	2SB1260L-x-AB3-R	2SB1260G-x-AB3-R	SOT-89	B	C	E	Tape Reel
2SB1260-x-TN3-R	2SB1260L-x-TN3-R	2SB1260G-x-TN3-R	TO-252	B	C	E	Tape Reel

2SB1260L-x-AB3-R	(1)Packing Type (2)Package Type (3)Rank (4)Lead Plating	(1) R: Tape Reel (2) AB3: SOT-89, TN3: TO-252 (3) refer to Classification of h_{FE} (4) G: Halogen Free, L: Lead Free, Blank: Pb/Sn
------------------	--	--

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector -Base Voltage	V_{CBO}	-80	V
Collector -Emitter Voltage	V_{CEO}	-80	V
Emitter -Base Voltage	V_{EBO}	-5	V
Peak Collector Current (single pulse, Pw=100ms)	I_{CM}	-2	A
DC Collector Current	I_C	-1	A
Power Dissipation	SOT-89	0.5	W
	TO-252	1.9	W
Junction Temperature	T_J	+150	°C
Storage Temperature	T_{STG}	-40 ~ +150	°C

Note 1. Printed circuit board, 1.7mm thick, collector copper plating 100mm² or larger.

2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Ta = 25°C, unless otherwise specified)







PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Base Breakdown Voltage	BV_{CBO}	$I_C = -50 \mu A$	-80			V
Collector Emitter Breakdown Voltage	BV_{CEO}	$I_C = -1mA$	-80			V
Emitter Base Breakdown Voltage	BV_{EBO}	$I_E = -50 \mu A$	-5			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -60V$			-1	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB} = -4V$			-1	μA
DC Current Gain(Note 1)	h_{FE}	$V_{CE} = -3V, I_{OUT} = -0.1A$	82		390	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = -500mA, I_B = -50mA$			-0.4	V
Transition Frequency	f_T	$V_{CE} = -5V, I_E = 50mA, f = 30MHz$		100		MHz
Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$		25		pF

Note 1: Pulse test: $P_W < 300\mu s$, Duty Cycle $< 2\%$



■ CLASSIFICATION OF h_{FE}

RANK	P	Q	R
RANGE	82 ~ 180	120 ~ 270	180 ~ 390

TYPICAL CHARACTERISTICS

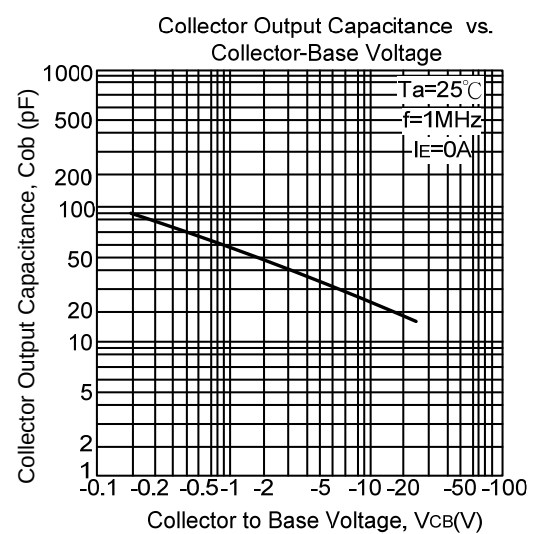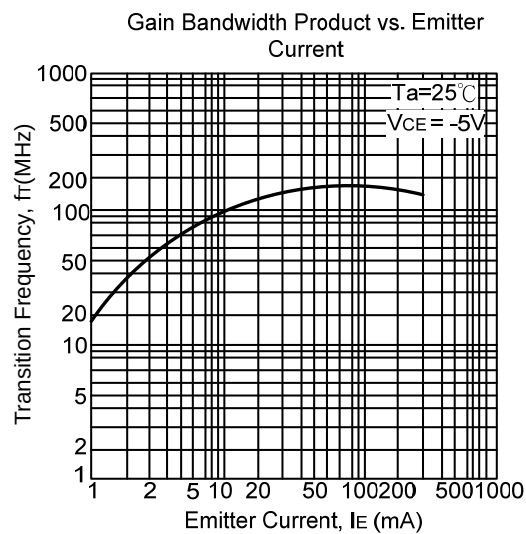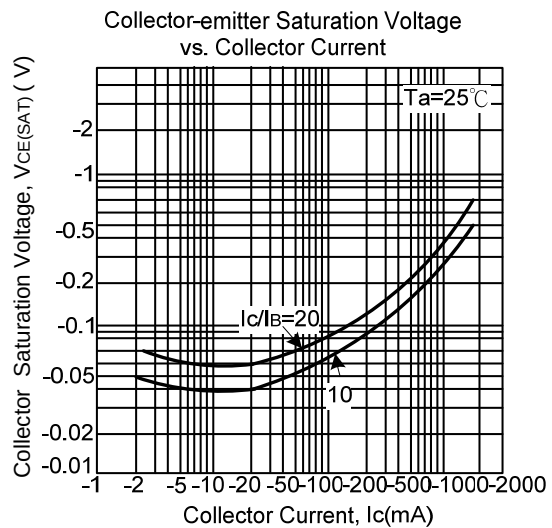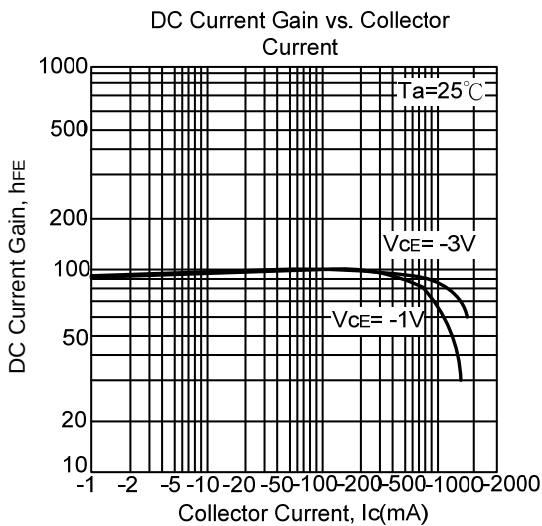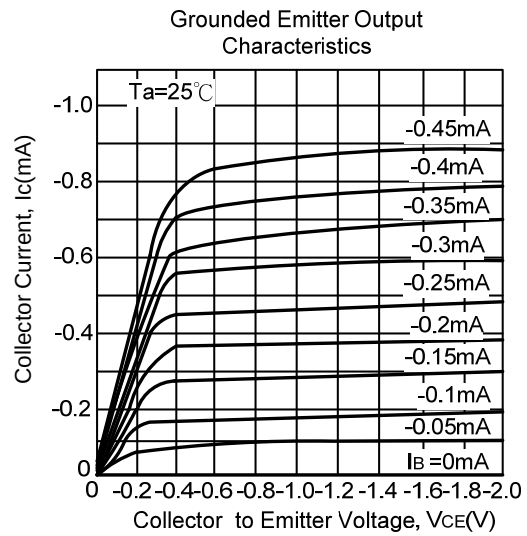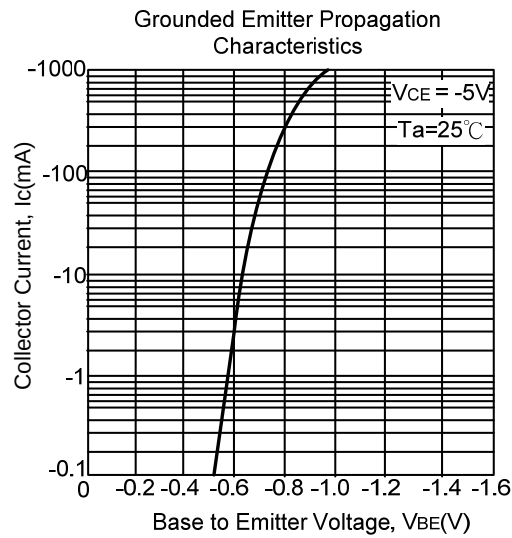

■ TYPICAL CHARACTERISTICS(Cont.)

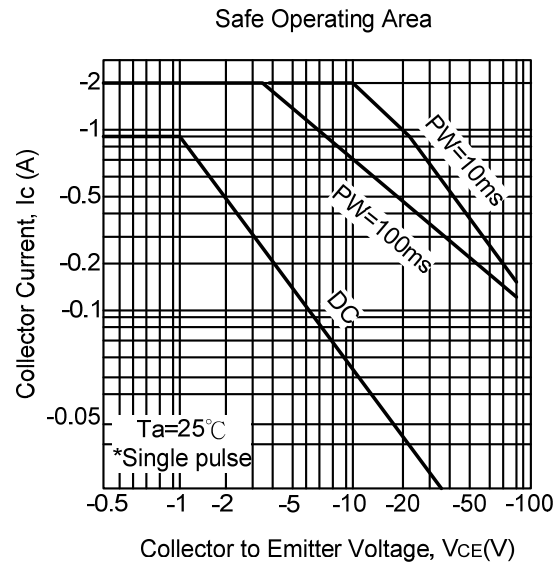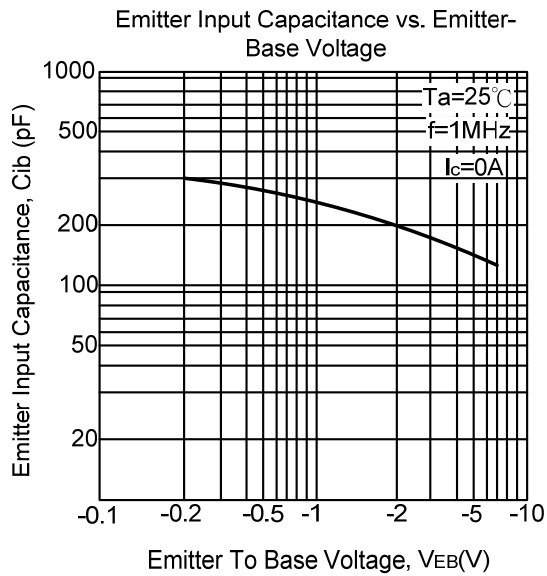

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.