


Darlington

2SB1258



Silicon PNP Epitaxial Planar Transistor (Complement to type 2SD1785)

Application : Driver for Solenoid, Relay and Motor and General Purpose


■ **Absolute maximum ratings** (Ta=25°C)

Symbol	Ratings	Unit
V _{CB0}	-100	V
V _{CE0}	-100	V
V _{EB0}	-6	V
I _C	-6(Pulse-10)	A
I _B	-1	A
P _C	30(Tc=25°C)	W
T _j	150	°C
T _{stg}	-55 to +150	°C


■ **Electrical Characteristics** (Ta=25°C)

Symbol	Conditions	Ratings	Unit
I _{CB0}	V _{CB} =-100V	-10max	μA
I _{EB0}	V _{EB} =-6V	-10max	μA
V _{(BR)CEO}	I _C =-10mA	-100min	V
h _{FE}	V _{CE} =-2V, I _C =-3A	1000min	
V _{CE(sat)}	I _C =-3A, I _B =-6mA	-1.5max	V
V _{BE(sat)}	I _C =-3A, I _B =-6mA	-2max	V
f _r	V _{CE} =-12V, I _E =0.2A	100typ	MHz
C _{OB}	V _{CB} =-10V, f=1MHz	100typ	pF


External Dimensions FM20(TO220F)

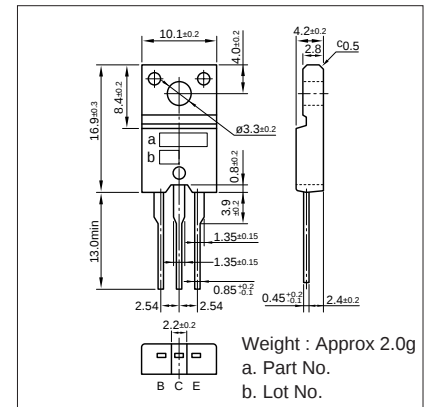


I_C-V_{CE} Characteristics (Typical)

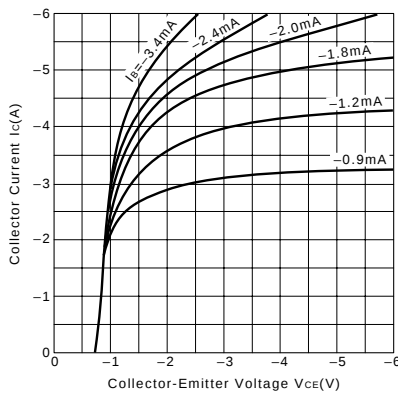


V_{CE(sat)}-I_B Characteristics (Typical)

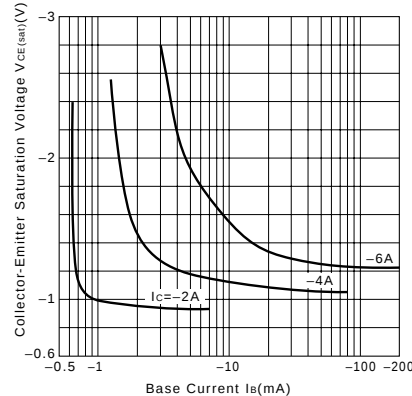


I_C-V_{BE} Temperature Characteristics (Typical)

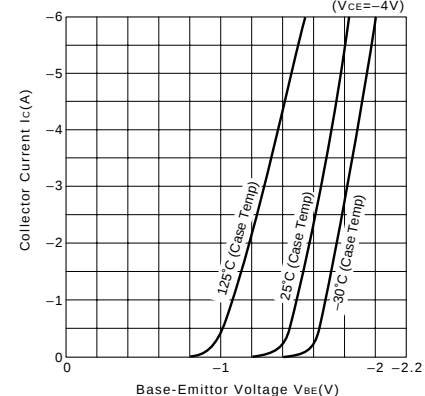


h_{FE}-I_C Characteristics (Typical)

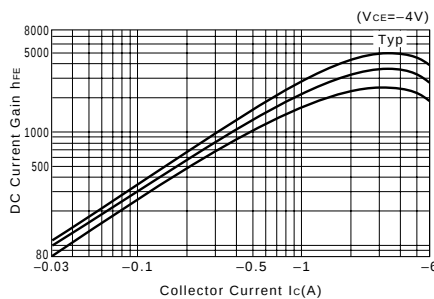


h_{FE}-I_C Temperature Characteristics (Typical)

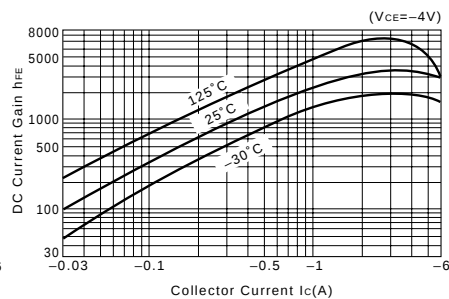


θ_{J-a}-t Characteristics

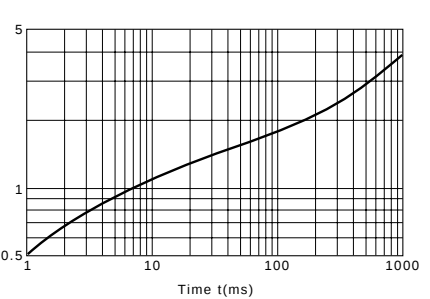

f_r-I_E Characteristics (Typical)

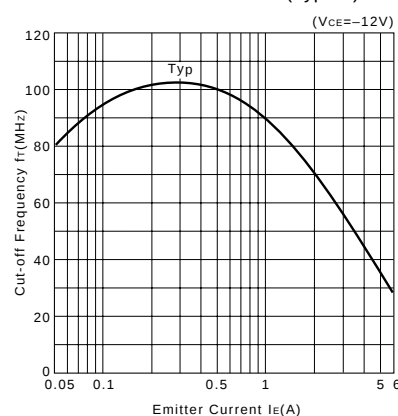

Safe Operating Area (Single Pulse)

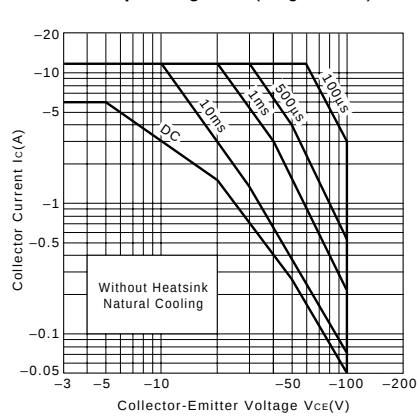

P_C-T_a Derating

