



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2SA1585S 2SA1585S-Q 2SA1585S-R

Features

- Power dissipation: $P_D = 0.4W(T_{amb}=25^{\circ}C)$
- Collector current: $I_{CM} = -2A$
- Collector-base voltage: $V_{(BR)CBO} = -20V$
- Operating and storage junction temperature range
 $T_J, T_{stg}: -55^{\circ}C$ to $+150^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Typ	Max	Unit
V_{CEO}	Collector-Emitter Voltage ($I_C = -50 \mu A, I_E = 0$)	-20	---	---	V
V_{CBO}	Collector-Base Voltage ($I_C = -1 \mu A, I_B = 0$)	-20	---	---	V
V_{EBO}	Emitter-Base Voltage ($I_E = -50 \mu A, I_C = 0$)	-6.0	---	---	V
I_{CBO}	Collector cut-off Current ($V_{CB} = -20V, I_E = 0$)	---	---	-0.1	μA
I_{EBO}	Emitter cut-off Current ($V_{EB} = -5V, I_C = 0$)	---	---	-0.1	μA
h_{FE}	DC current gain ($V_{CE} = -2V, I_C = -0.1A$)	120	---	390	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = -2A, I_B = -0.1A$)	---	---	-0.82	V
f_T	Transition Frequency ($V_{CE} = 2.0Vdc, I_C = 0.5Adc$)	200	---	---	MHz

CLASSIFICATION OF h_{FE}

Rank	Q	R
Range	120-170	180-390
Marking	1815Q	1815R

PNP Plastic-Encapsulate Transistors

TO-92S

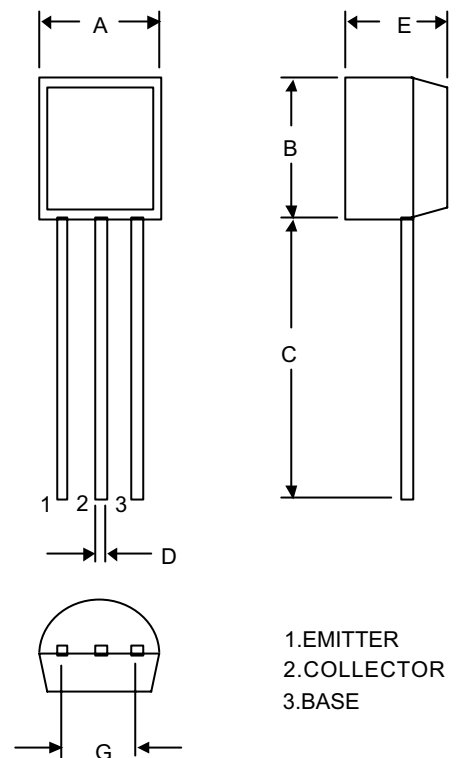

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A		.16		4.00	
B		.12		3.00	
C	.59	---	15.00	---	
D		.02		0.45	
E		.08		2.00	
G		.20		5.00	