

2MBI300U4N-170-50

IGBT Modules

IGBT MODULE (U series) 1700V / 300A / 2 in one package

■ Features

- High speed switching
- Voltage drive
- Low Inductance module structure

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply
- Industrial machines, such as Welding machines



■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings (at Tc=25°C unless otherwise specified)

Items	Symbols	Conditions	Maximum ratings	Units
Collector-Emitter voltage	V _{CES}		1700	V
Gate-Emitter voltage	V _{GES}		±20	V
Collector current	I _c	Continuous	Tc=25°C 450	A
			Tc=80°C 300	
	I _{cp}	1ms	Tc=25°C 900	
			Tc=80°C 600	
	-I _c		300	
	-I _c pulse	1ms	600	
Collector power dissipation	P _c	1 device	1385	W
Junction temperature	T _j		150	°C
Storage temperature	T _{stg}		-40 to +125	
Isolation voltage	between terminal and copper base (*1)	AC : 1min.	3400	VAC
	between thermistor and others (*2)			
Screw torque	Mounting (*3)		3.5	N m
	Terminals (*4)		4.5	

Note *1: All terminals should be connected together when isolation test will be done.

Note *2: Two thermistor terminals should be connected together, each other terminals should be connected together and shorted to base plate when isolation test will be done.

Note *3: Recommendable value : Mounting : 2.5-3.5 Nm (M5) Note *4: Recommendable value : Terminals : 3.5-4.5 Nm (M6)

● Electrical characteristics (at Tj= 25°C unless otherwise specified)

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	max.	
Zero gate voltage collector current	I _{CES}	V _{GE} = 0V, V _{CE} = 1700V	-	-	3.0	mA
Gate-Emitter leakage current	I _{GES}	V _{CE} = 0V, V _{GE} = ±20V	-	-	600	nA
Gate-Emitter threshold voltage	V _{GE(th)}	V _{CE} = 20V, I _c = 300mA	4.5	6.5	8.5	V
Collector-Emitter saturation voltage	V _{CE(sat)} (terminal)	V _{GE} = 15V I _c = 300A	Tj=25°C	2.70	2.90	V
			Tj=125°C	3.10	-	
	V _{CE(sat)} (chip)		Tj=25°C	2.30	2.45	
			Tj=125°C	2.65	-	
Input capacitance	C _{ies}	V _{CE} = 10V, V _{GE} = 0V, f = 1MHz	-	28	-	nF
Turn-on time	t _{on}	V _{CC} = 900V I _c = 300A V _{GE} = ±15V R _G = 1.5Ω	-	0.62	1.20	μs
	t _r		-	0.39	0.60	
	t _{r(i)}		-	0.05	-	
Turn-off time	t _{off}		-	0.55	1.50	μs
	t _f		-	0.09	0.30	
Forward on voltage	V _F (terminal)	V _{GE} = 0V I _F = 300A	Tj=25°C	2.10	2.40	V
			Tj=125°C	2.30	-	
	V _F (chip)		Tj=25°C	1.80	1.95	
			Tj=125°C	2.00	-	
Reverse recovery time	t _{rr}	I _F = 300A	-	0.18	0.6	μs
Lead resistance, terminal-chip (*5)	R _{lead}		-	1.00	-	mΩ
Resistance	R	T=25°C	-	5000	-	Ω
		T=100°C	465	495	520	
B value	B	T=25/50°C	3305	3375	3450	K

Note *5: Biggest internal terminal resistance among arm.


● Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	max.	
Thermal resistance (1device)	R _{th(j-c)}	IGBT FWD	-	-	0.09	°C/W
Contact thermal resistance (1device) (*6)	R _{th(c-f)}	with Thermal Compound	-	0.0167	-	


Note *6: This is the value which is defined mounting on the additional cooling fin with thermal compound.

■ Characteristics (Representative)


Collector current vs. Collector-Emitter voltage (typ.)

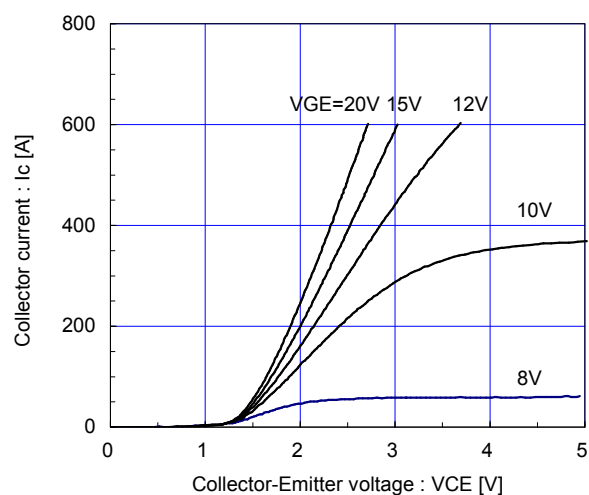 $T_j = 25^\circ\text{C}$ / chip


Collector current vs. Collector-Emitter voltage (typ.)

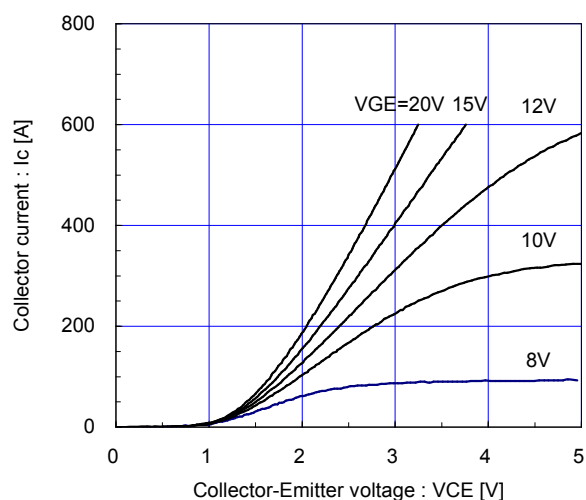 $T_j = 125^\circ\text{C}$ / chip


Collector current vs. Collector-Emitter voltage (typ.)

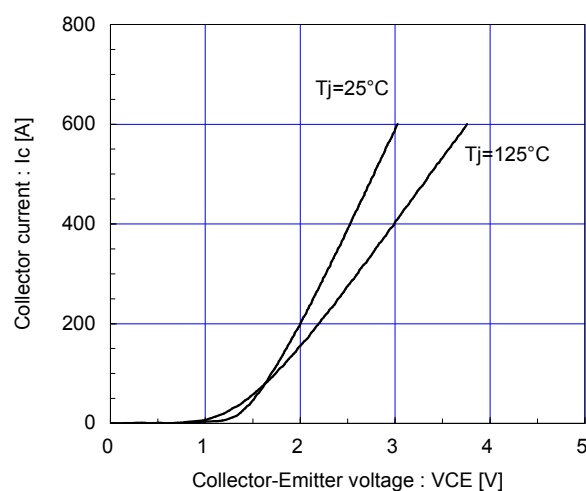 $V_{GE} = 15\text{V}$ / chip


Collector-Emitter voltage vs. Gate-Emitter voltage (typ.)

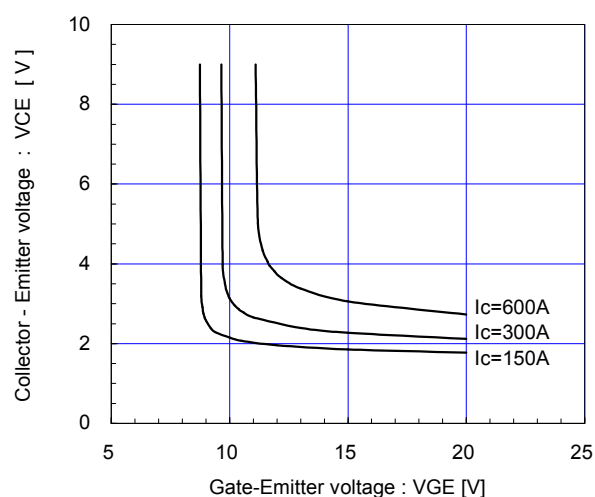 $T_j = 25^\circ\text{C}$ / chip


Capacitance vs. Collector-Emitter voltage (typ.)

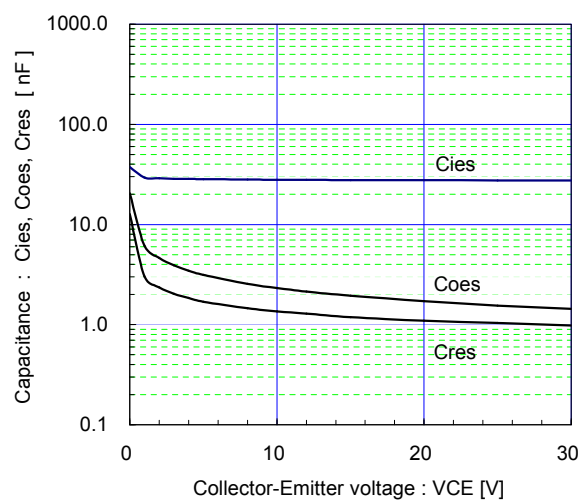 $V_{GE} = 0\text{V}, f = 1\text{MHz}, T_j = 25^\circ\text{C}$ 


Dynamic Gate charge (typ.)

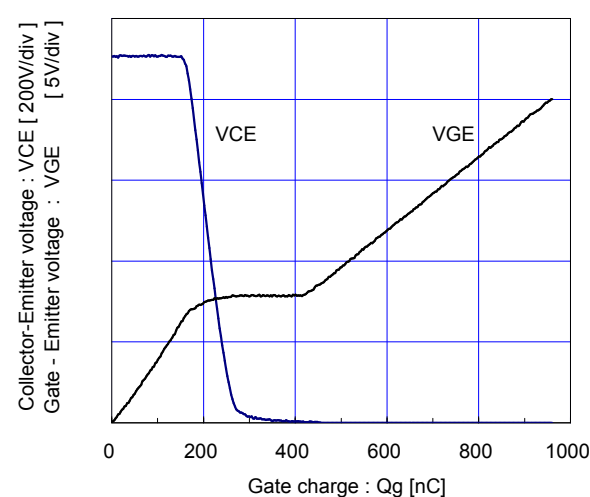 $V_{CC} = 900\text{V}, I_c = 300\text{A}, T_j = 25^\circ\text{C}$ 


Switching time vs. Collector current (typ.)
 $V_{cc}=900V$, $V_{GE}=\pm 15V$, $R_g=1.5\Omega$, $T_j=25^\circ C$

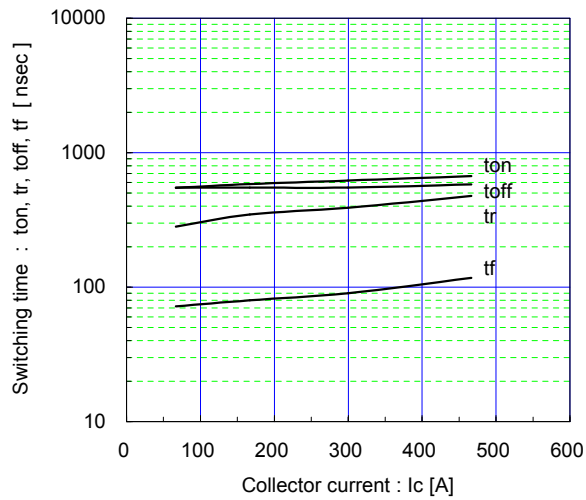


Switching time vs. Collector current (typ.)
 $V_{cc}=900V$, $V_{GE}=\pm 15V$, $R_g=1.5\Omega$, $T_j=125^\circ C$

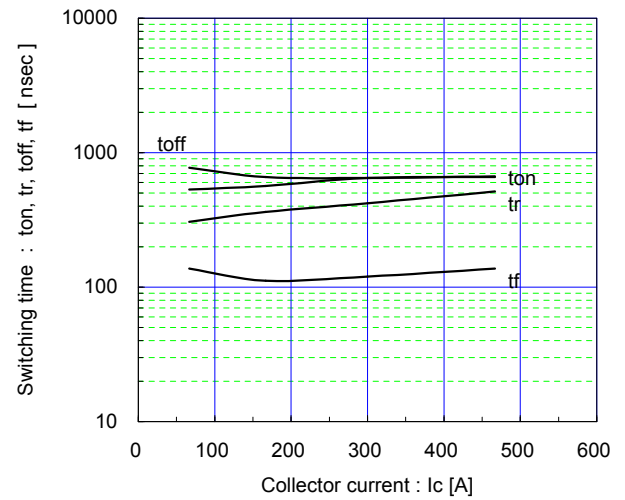


Switching time vs. Gate resistance (typ.)
 $V_{cc}=900V$, $I_c=300A$, $V_{GE}=\pm 15V$, $T_j=25^\circ C$

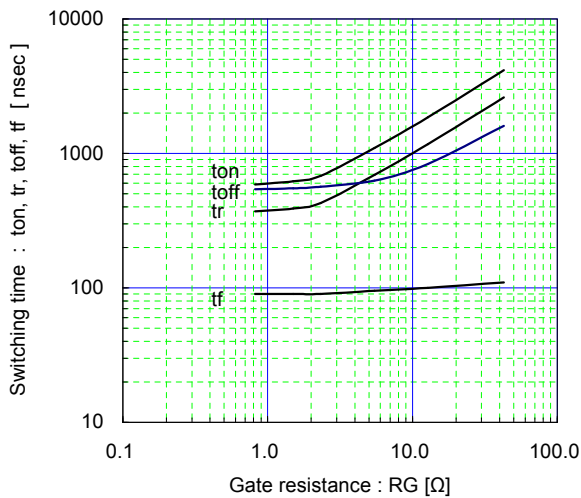


Switching loss vs. Collector current (typ.)
 $V_{cc}=900V$, $V_{GE}=\pm 15V$, $R_g=1.5\Omega$

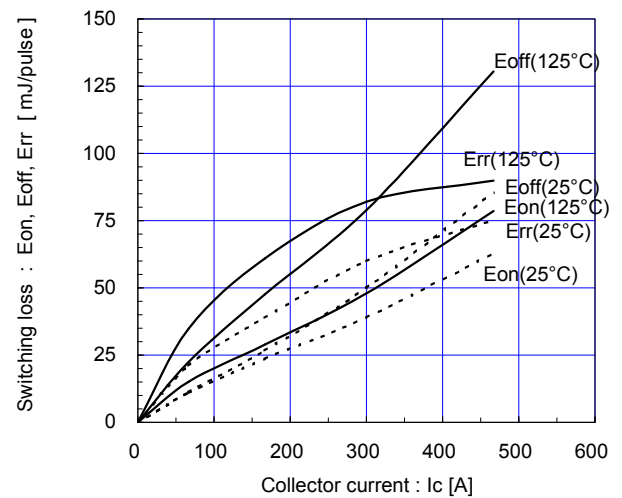


Switching loss vs. Gate resistance (typ.)
 $V_{cc}=900V$, $I_c=300A$, $V_{GE}=\pm 15V$, $T_j=125^\circ C$

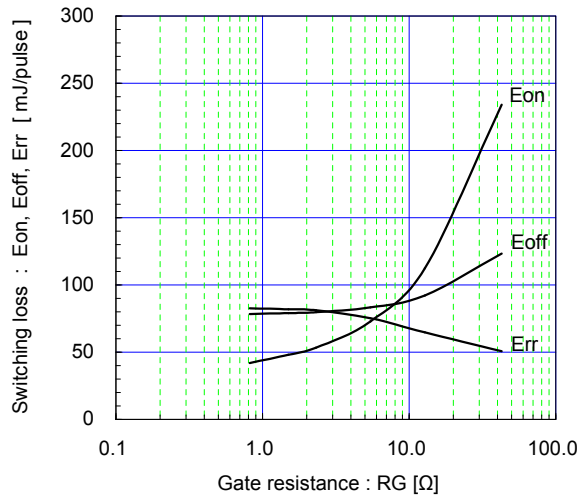


Reverse bias safe operating area (max.)
 $+V_{GE}=15V$, $-V_{GE} \leq 15V$, $R_g \geq 1.5\Omega$, $T_j \leq 125^\circ C$
 Stray inductance $\leq 100nH$

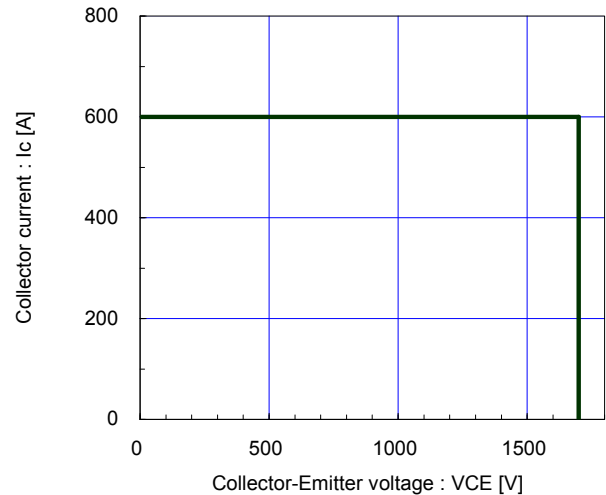


Forward current vs. Forward on voltage (typ.)
chip

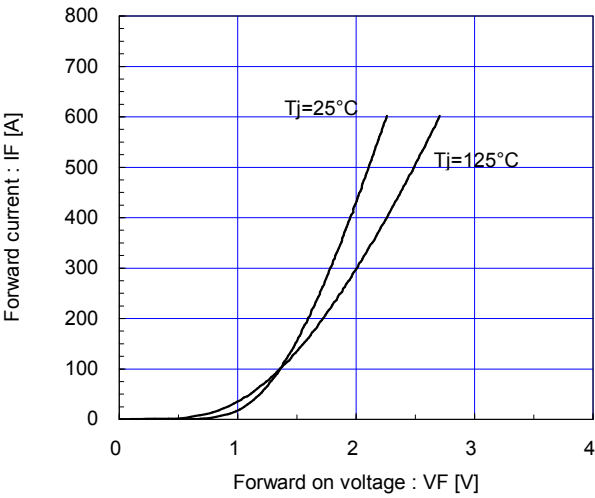


Reverse recovery characteristics (typ.)
 $V_{cc}=900\text{V}$, $V_{GE}=\pm 15\text{V}$, $R_g=1.5\Omega$

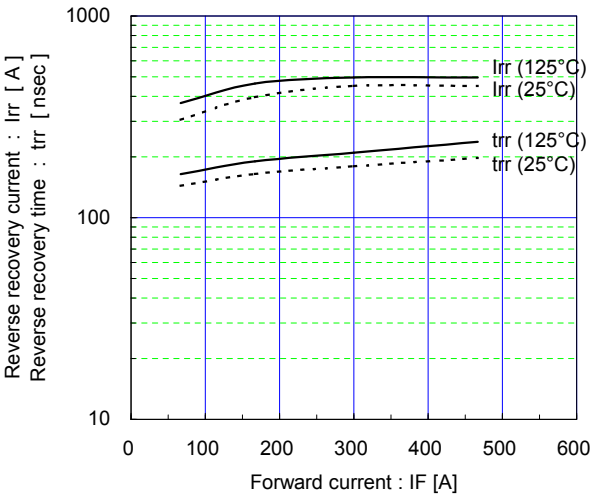


Transient thermal resistance (max.)

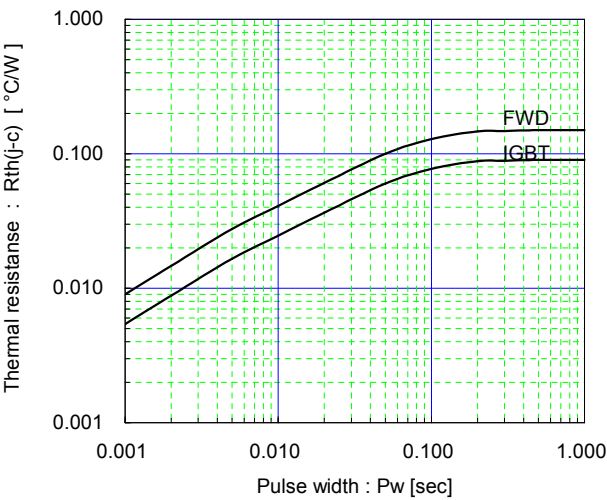


[Thermistor]
Temperature characteristic (typ.)

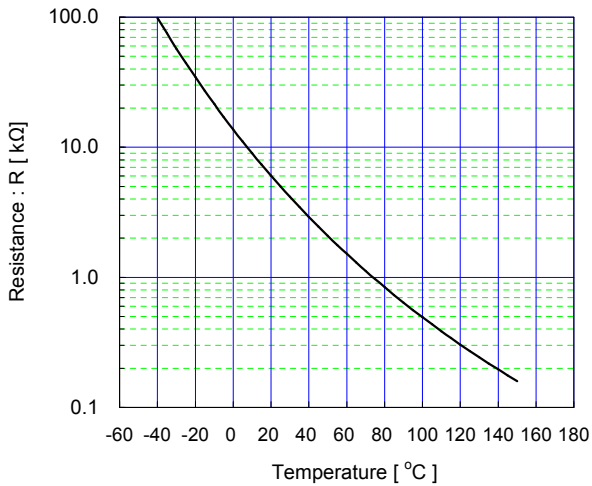

■ Outline Drawings, mm

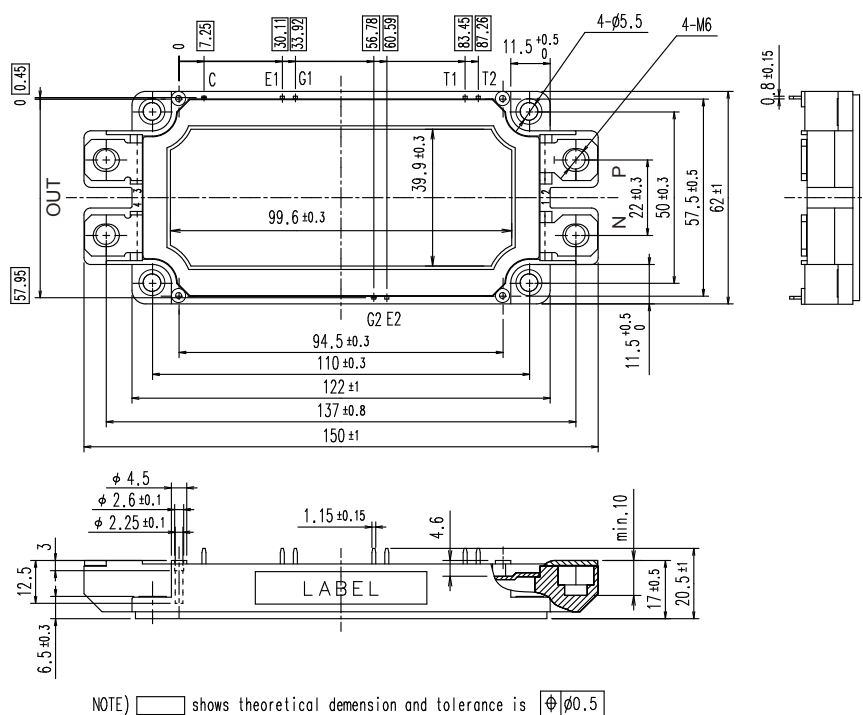

■ Equivalent Circuit Schematic

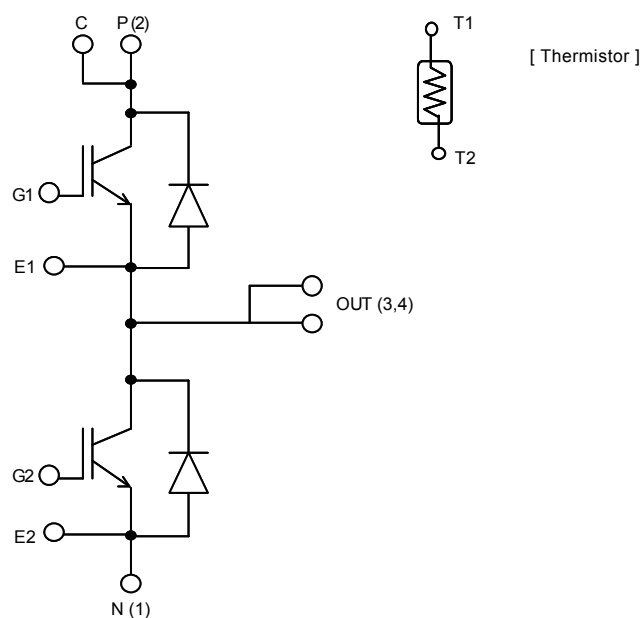

WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of October 2008.
The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Device Technology Co., Ltd. is (or shall be deemed) granted. Fuji Electric Device Technology Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric Device Technology Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.

• Computers	• OA equipment	• Communications equipment (terminal devices)	• Measurement equipment
• Machine tools	• Audiovisual equipment	• Electrical home appliances	• Personal equipment
			• Industrial robots etc.
5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Device Technology Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.

• Transportation equipment (mounted on cars and ships)	• Trunk communications equipment
• Traffic-signal control equipment	• Gas leakage detectors with an auto-shut-off feature
• Emergency equipment for responding to disasters and anti-burglary devices	• Safety devices
• Medical equipment	
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).

• Space equipment	• Aeronautic equipment	• Nuclear control equipment
• Submarine repeater equipment		
7. Copyright ©1996-2008 by Fuji Electric Device Technology Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Device Technology Co., Ltd.
8. If you have any question about any portion in this Catalog, ask Fuji Electric Device Technology Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Device Technology Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.