

# MC74VHC1GT50

## Noninverting Buffer / CMOS Logic Level Shifter with TTL-Compatible Inputs

The MC74VHC1GT50 is a single gate noninverting buffer fabricated with silicon gate CMOS technology. It achieves high speed operation similar to equivalent Bipolar Schottky TTL while maintaining CMOS low power dissipation.

The internal circuit is composed of three stages, including a buffer output which provides high noise immunity and stable output.

The device input is compatible with TTL-type input thresholds and the output has a full 5 V CMOS level output swing. The input protection circuitry on this device allows overvoltage tolerance on the input, allowing the device to be used as a logic-level translator from 3.0 V CMOS logic to 5.0 V CMOS Logic or from 1.8 V CMOS logic to 3.0 V CMOS Logic while operating at the high-voltage power supply.

The MC74VHC1GT50 input structure provides protection when voltages up to 7 V are applied, regardless of the supply voltage. This allows the MC74VHC1GT50 to be used to interface high voltage to low voltage circuits. The output structures also provide protection when  $V_{CC} = 0$  V. These input and output structures help prevent device destruction caused by supply voltage - input/output voltage mismatch, battery backup, hot insertion, etc.

- Designed for 1.65 V to 5.5  $V_{CC}$  Operation
- High Speed:  $t_{PD} = 3.5$  ns (Typ) at  $V_{CC} = 5$  V
- Low Power Dissipation:  $I_{CC} = 1$   $\mu$ A (Max) at  $T_A = 25^\circ\text{C}$
- TTL-Compatible Inputs:  $V_{IL} = 0.8$  V;  $V_{IH} = 2.0$  V,  $V_{CC} = 5$  V
- CMOS- Compatible Outputs:  $V_{OH} > 0.8 V_{CC}$ ;  $V_{OL} < 0.1 V_{CC}$  @Load
- Power Down Protection Provided on Inputs and Outputs
- Balanced Propagation Delays
- Pin and Function Compatible with Other Standard Logic Families
- Chip Complexity: FETs = 104; Equivalent Gates = 26

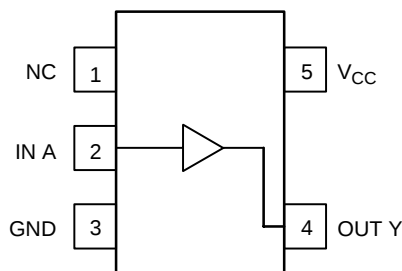


Figure 1. Pinout (Top View)






Figure 2. Logic Symbol



ON Semiconductor®

<http://onsemi.com>

### MARKING DIAGRAMS

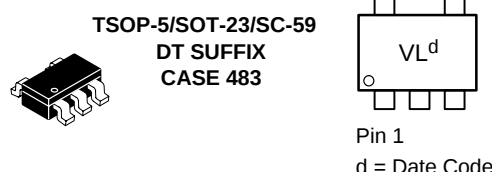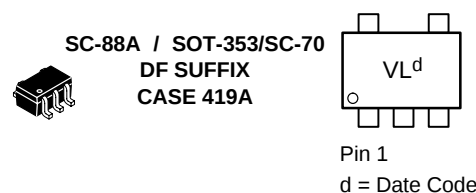

### PIN ASSIGNMENT

|   |          |
|---|----------|
| 1 | NC       |
| 2 | IN A     |
| 3 | GND      |
| 4 | OUT Y    |
| 5 | $V_{CC}$ |

### FUNCTION TABLE

| A Input | Y Output |
|---------|----------|
| L       | L        |
| H       | H        |

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

# MC74VHC1GT50

## MAXIMUM RATINGS (Note 1)

| Symbol         | Characteristics                                                                                               | Value                                 | Unit |
|----------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------|------|
| $V_{CC}$       | DC Supply Voltage                                                                                             | -0.5 to +7.0                          | V    |
| $V_{IN}$       | DC Input Voltage                                                                                              | -0.5 to +7.0                          | V    |
| $V_{OUT}$      | DC Output Voltage<br>$V_{CC} = 0$<br>High or Low State                                                        | -0.5 to 7.0<br>-0.5 to $V_{CC} + 0.5$ | V    |
| $I_{IK}$       | Input Diode Current                                                                                           | -20                                   | mA   |
| $I_{OK}$       | Output Diode Current<br>$V_{OUT} < GND$ ; $V_{OUT} > V_{CC}$                                                  | +20                                   | mA   |
| $I_{OUT}$      | DC Output Current, per Pin                                                                                    | +25                                   | mA   |
| $I_{CC}$       | DC Supply Current, $V_{CC}$ and GND                                                                           | +50                                   | mA   |
| $P_D$          | Power dissipation in still air<br>SC-88A, TSOP-5                                                              | 200                                   | mW   |
| $\theta_{JA}$  | Thermal resistance<br>SC-88A, TSOP-5                                                                          | 333                                   | °C/W |
| $T_L$          | Lead temperature, 1 mm from case for 10 s                                                                     | 260                                   | °C   |
| $T_J$          | Junction temperature under bias                                                                               | +150                                  | °C   |
| $T_{stg}$      | Storage temperature                                                                                           | -65 to +150                           | °C   |
| $V_{ESD}$      | ESD Withstand Voltage<br>Human Body Model (Note 2)<br>Machine Model (Note 3)<br>Charged Device Model (Note 4) | > 2000<br>> 200<br>N/A                | V    |
| $I_{Latch-Up}$ | Latch-Up Performance<br>Above $V_{CC}$ and Below GND at 125°C (Note 5)                                        | ±500                                  | mA   |

1. Maximum Ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute-maximum-rated conditions is not implied. Functional operation should be restricted to the Recommended Operating Conditions.

2. Tested to EIA/JESD22-A114-A

3. Tested to EIA/JESD22-A115-A

4. Tested to JESD22-C101-A

5. Tested to EIA/JESD78

## RECOMMENDED OPERATING CONDITIONS

| Symbol     | Characteristics                                                                      | Min        | Max             | Unit |
|------------|--------------------------------------------------------------------------------------|------------|-----------------|------|
| $V_{CC}$   | DC Supply Voltage                                                                    | 1.65       | 5.5             | V    |
| $V_{IN}$   | DC Input Voltage                                                                     | 0.0        | 5.5             | V    |
| $V_{OUT}$  | DC Output Voltage<br>$V_{CC} = 0$<br>High or Low State                               | 0.0<br>0.0 | 5.5<br>$V_{CC}$ | V    |
| $T_A$      | Operating Temperature Range                                                          | -55        | +125            | °C   |
| $t_r, t_f$ | Input Rise and Fall Time<br>$V_{CC} = 3.3 V \pm 0.3 V$<br>$V_{CC} = 5.0 V \pm 0.5 V$ | 0<br>0     | 100<br>20       | ns/V |

## Device Junction Temperature versus Time to 0.1% Bond Failures

| Junction Temperature °C | Time, Hours | Time, Years |
|-------------------------|-------------|-------------|
| 80                      | 1,032,200   | 117.8       |
| 90                      | 419,300     | 47.9        |
| 100                     | 178,700     | 20.4        |
| 110                     | 79,600      | 9.4         |
| 120                     | 37,000      | 4.2         |
| 130                     | 17,800      | 2.0         |
| 140                     | 8,900       | 1.0         |

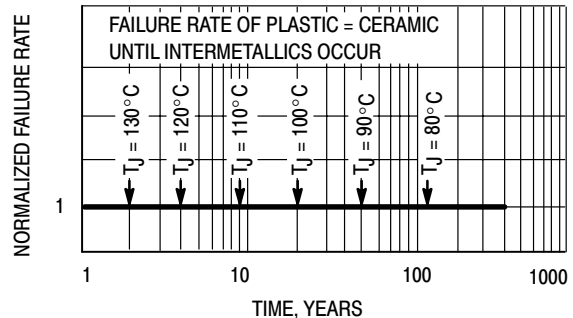


Figure 3. Failure Rate vs. Time Junction Temperature

# MC74VHC1GT50

## DC ELECTRICAL CHARACTERISTICS

| Symbol            | Parameter                         | Test Conditions                                                                         | V <sub>CC</sub><br>(V)                           | T <sub>A</sub> = 25°C                                             |            |                                                                    | T <sub>A</sub> ≤ 85°C                                             |                                                                    | -55 ≤ T <sub>A</sub> ≤ 125°C                                      |                                                                    | Unit |
|-------------------|-----------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------------------------|------------|--------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------|------|
|                   |                                   |                                                                                         |                                                  | Min                                                               | Typ        | Max                                                                | Min                                                               | Max                                                                | Min                                                               | Max                                                                |      |
| V <sub>IH</sub>   | Minimum High-Level Input Voltage  |                                                                                         | 1.65 to 2.29<br>2.3 to 2.99<br>3.0<br>4.5<br>5.5 | 0.50 V <sub>CC</sub><br>0.45 V <sub>CC</sub><br>1.4<br>2.0<br>2.0 |            |                                                                    | 0.50 V <sub>CC</sub><br>0.45 V <sub>CC</sub><br>1.4<br>2.0<br>2.0 |                                                                    | 0.50 V <sub>CC</sub><br>0.45 V <sub>CC</sub><br>1.4<br>2.0<br>2.0 |                                                                    | V    |
| V <sub>IL</sub>   | Maximum Low-Level Input Voltage   |                                                                                         | 1.65 to 2.29<br>2.3 to 2.99<br>3.0<br>4.5<br>5.5 |                                                                   |            | 0.10 V <sub>CC</sub><br>0.15 V <sub>CC</sub><br>0.53<br>0.8<br>0.8 |                                                                   | 0.10 V <sub>CC</sub><br>0.15 V <sub>CC</sub><br>0.53<br>0.8<br>0.8 |                                                                   | 0.10 V <sub>CC</sub><br>0.15 V <sub>CC</sub><br>0.53<br>0.8<br>0.8 | V    |
| V <sub>OH</sub>   | Minimum High-Level Output Voltage | V <sub>IN</sub> = V <sub>IH</sub><br>I <sub>OH</sub> = -50 μA                           | 1.65 to 2.99<br>3.0<br>4.5                       | V <sub>CC</sub> - 0.1<br>2.9<br>4.4                               | 3.0<br>4.5 |                                                                    | V <sub>CC</sub> - 0.1<br>2.9<br>4.4                               |                                                                    | V <sub>CC</sub> - 0.1<br>2.9<br>4.4                               |                                                                    | V    |
|                   |                                   | V <sub>IN</sub> = V <sub>IH</sub><br>I <sub>OH</sub> = -4 mA<br>I <sub>OH</sub> = -8 mA | 3.0<br>4.5                                       | 2.58<br>3.94                                                      |            |                                                                    | 2.48<br>3.80                                                      |                                                                    | 2.34<br>3.66                                                      |                                                                    | V    |
| V <sub>OL</sub>   | Maximum Low-Level Output Voltage  | V <sub>IN</sub> = V <sub>IL</sub><br>I <sub>OL</sub> = 50 μA                            | 1.65 to 2.99<br>3.0<br>4.5                       |                                                                   | 0.0<br>0.0 | 0.1<br>0.1<br>0.1                                                  |                                                                   | 0.1<br>0.1<br>0.1                                                  |                                                                   | 0.1<br>0.1<br>0.1                                                  | V    |
|                   |                                   | V <sub>IN</sub> = V <sub>IL</sub><br>I <sub>OL</sub> = 4 mA<br>I <sub>OL</sub> = 8 mA   | 3.0<br>4.5                                       |                                                                   |            | 0.36<br>0.36                                                       |                                                                   | 0.44<br>0.44                                                       |                                                                   | 0.52<br>0.52                                                       | V    |
| I <sub>IN</sub>   | Maximum Input Leakage Current     | V <sub>IN</sub> = 5.5 V or GND                                                          | 0 to 5.5                                         |                                                                   |            | ±0.1                                                               |                                                                   | ±1.0                                                               |                                                                   | ±1.0                                                               | μA   |
| I <sub>CC</sub>   | Maximum Quiescent Supply Current  | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                | 5.5                                              |                                                                   |            | 1.0                                                                |                                                                   | 20                                                                 |                                                                   | 40                                                                 | μA   |
| I <sub>CC</sub> T | Quiescent Supply Current          | Input: V <sub>IN</sub> = 3.4 V                                                          | 5.5                                              |                                                                   |            | 1.35                                                               |                                                                   | 1.50                                                               |                                                                   | 1.65                                                               | mA   |
| I <sub>OPD</sub>  | Output Leakage Current            | V <sub>OUT</sub> = 5.5 V                                                                | 0.0                                              |                                                                   |            | 0.5                                                                |                                                                   | 5.0                                                                |                                                                   | 10                                                                 | μA   |

# MC74VHC1GT50

## AC ELECTRICAL CHARACTERISTICS $C_{load} = 50 \text{ pF}$ , Input $t_r = t_f = 3.0 \text{ ns}$

| Symbol                   | Parameter                               | Test Conditions                                                                 | $T_A = 25^\circ\text{C}$ |            |              | $T_A \leq 85^\circ\text{C}$ |              | $-55 \leq T_A \leq 125^\circ\text{C}$ |              | Unit |
|--------------------------|-----------------------------------------|---------------------------------------------------------------------------------|--------------------------|------------|--------------|-----------------------------|--------------|---------------------------------------|--------------|------|
|                          |                                         |                                                                                 | Min                      | Typ        | Max          | Min                         | Max          | Min                                   | Max          |      |
| $t_{PLH}$ ,<br>$t_{PHL}$ | Maximum Propagation Delay, Input A to Y | $V_{CC} = 1.8 \pm 0.15 \text{ V}$ $C_L = 15 \text{ pF}$                         |                          |            | 16.6         |                             | 18.0         |                                       | 22.0         | ns   |
|                          |                                         | $V_{CC} = 2.5 \pm 0.2 \text{ V}$ $C_L = 15 \text{ pF}$<br>$C_L = 50 \text{ pF}$ |                          |            | 13.3<br>19.5 |                             | 14.5<br>22.0 |                                       | 17.5<br>25.5 | ns   |
|                          |                                         | $V_{CC} = 3.3 \pm 0.3 \text{ V}$ $C_L = 15 \text{ pF}$<br>$C_L = 50 \text{ pF}$ |                          | 4.5<br>6.3 | 10.0<br>13.5 |                             | 11.0<br>15.0 |                                       | 13.0<br>17.5 | ns   |
|                          |                                         | $V_{CC} = 5.0 \pm 0.5 \text{ V}$ $C_L = 15 \text{ pF}$<br>$C_L = 50 \text{ pF}$ |                          | 3.5<br>4.3 | 6.7<br>7.7   |                             | 7.5<br>8.5   |                                       | 8.5<br>9.5   |      |
| $C_{IN}$                 | Maximum Input Capacitance               |                                                                                 |                          | 5          | 10           |                             | 10           |                                       | 10           | pF   |

| C <sub>PD</sub> | Power Dissipation Capacitance (Note 6) | Typical @ 25°C, V <sub>CC</sub> = 5.0 V | pF |
|-----------------|----------------------------------------|-----------------------------------------|----|
|                 |                                        | 12                                      |    |

6.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in} + I_{CC} \cdot V_{CC}$ .


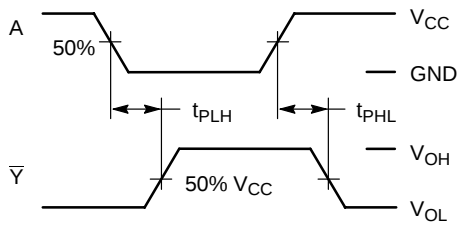


Figure 4. Switching Waveforms

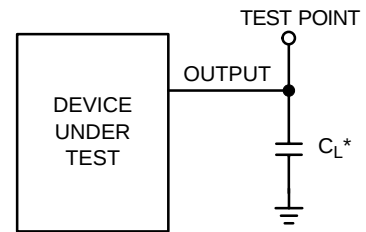

\*Includes all probe and jig capacitance

Figure 5. Test Circuit

# MC74VHC1GT50

## DEVICE ORDERING INFORMATION

| Device Order Number | Device Nomenclature |                       |            |                 |                |                    | Package Type<br>(Name/SOT#/Common Name) | Tape and Reel Size       |
|---------------------|---------------------|-----------------------|------------|-----------------|----------------|--------------------|-----------------------------------------|--------------------------|
|                     | Circuit Indicator   | Temp Range Identifier | Technology | Device Function | Package Suffix | Tape & Reel Suffix |                                         |                          |
| MC74VHC1GT50DFT1    | MC                  | 74                    | VHC1G      | T50             | DF             | T1                 | SC-88A / SOT-353 / SC-70                | 178 mm (7")<br>3000 Unit |
| MC74VHC1GT50DFT2    | MC                  | 74                    | VHC1G      | T50             | DF             | T2                 | SC-88A / SOT-353 / SC-70                | 178 mm (7")<br>3000 Unit |
| MC74VHC1GT50DTT1    | MC                  | 74                    | VHC1G      | T50             | DT             | T1                 | TSOP-5 / SOT-23 / SC-59                 | 178 mm (7")<br>3000 Unit |



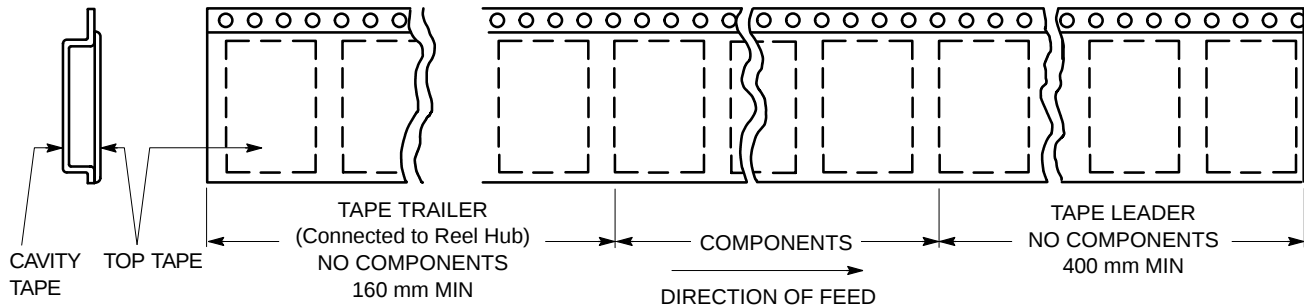


Figure 6. Tape Ends for Finished Goods

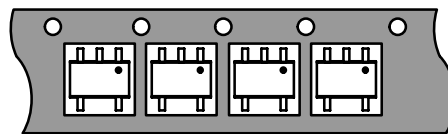


"T1" Pin One Toward Sprocket Hole (3k Reel)

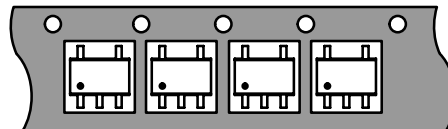

"T2" Pin One Opposing Sprocket Hole (3k Reel)

Figure 7. SC-88A/SOT-353/SC-70-5 DFT1 and DFT2 Reel Configuration/Orientation

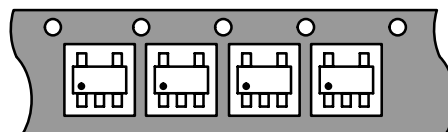

"T1" Pin One Opposing Sprocket Hole (3k Reel)

Figure 8. TSOP-5/SC59-5/SOT23-5 DTT1 Reel Configuration/Orientation

## MC74VHC1GT50



Figure 9. Reel Dimensions

### REEL DIMENSIONS

| Tape Size | T and R Suffix | A Max            | G                                                     | t Max                |
|-----------|----------------|------------------|-------------------------------------------------------|----------------------|
| 8 mm      | T1, T2         | 178 mm<br>(7 in) | 8.4 mm, + 1.5 mm, -0.0<br>(0.33 in + 0.059 in, -0.00) | 14.4 mm<br>(0.56 in) |


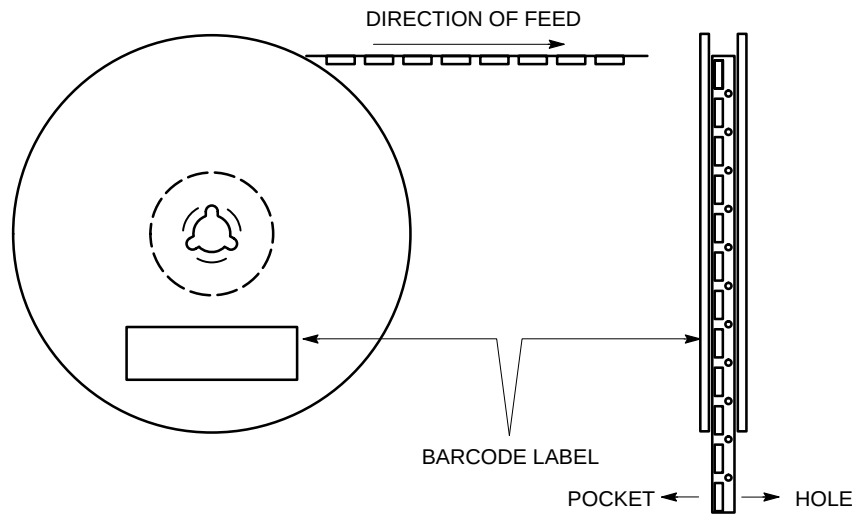


Figure 10. Reel Winding Direction

# MC74VHC1GT50



## PACKAGE DIMENSIONS

SC-88A / SOT-353 / SC-70  
DF SUFFIX  
5-LEAD PACKAGE  
CASE 419A-02  
ISSUE F

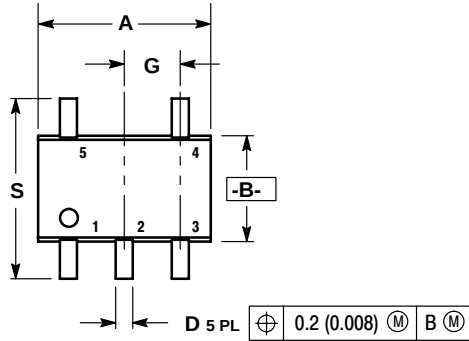

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. 419A-01 OBSOLETE. NEW STANDARD 419A-02.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.071     | 0.087 | 1.80        | 2.20 |
| B   | 0.045     | 0.053 | 1.15        | 1.35 |
| C   | 0.031     | 0.043 | 0.80        | 1.10 |
| D   | 0.004     | 0.012 | 0.10        | 0.30 |
| G   | 0.026 BSC |       | 0.65 BSC    |      |
| H   | ---       | 0.004 | ---         | 0.10 |
| J   | 0.004     | 0.010 | 0.10        | 0.25 |
| K   | 0.004     | 0.012 | 0.10        | 0.30 |
| N   | 0.008 REF |       | 0.20 REF    |      |
| S   | 0.079     | 0.087 | 2.00        | 2.20 |

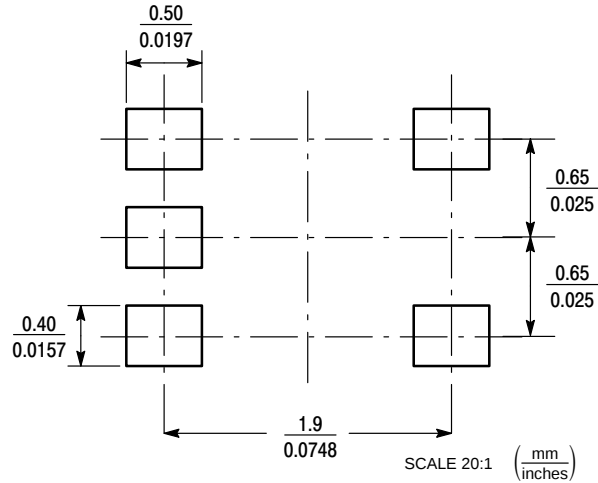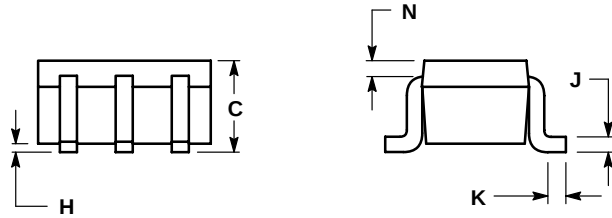

# MC74VHC1GT50

## PACKAGE DIMENSIONS



TSOP-5 / SOT-23 / SC-59

DT SUFFIX

5-LEAD PACKAGE

CASE 483-01


ISSUE B



### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

| DIM | MILLIMETERS |       | INCHES |        |
|-----|-------------|-------|--------|--------|
|     | MIN         | MAX   | MIN    | MAX    |
| A   | 2.90        | 3.10  | 0.1142 | 0.1220 |
| B   | 1.30        | 1.70  | 0.0512 | 0.0669 |
| C   | 0.90        | 1.10  | 0.0354 | 0.0433 |
| D   | 0.25        | 0.50  | 0.0098 | 0.0197 |
| G   | 0.85        | 1.05  | 0.0335 | 0.0413 |
| H   | 0.013       | 0.100 | 0.0005 | 0.0040 |
| J   | 0.10        | 0.26  | 0.0040 | 0.0102 |
| K   | 0.20        | 0.60  | 0.0079 | 0.0236 |
| L   | 1.25        | 1.55  | 0.0493 | 0.0610 |
| M   | 0°          | 10°   | 0°     | 10°    |
| S   | 2.50        | 3.00  | 0.0985 | 0.1181 |

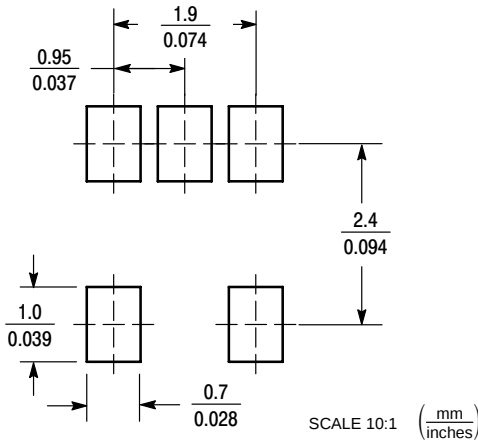

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

### Literature Fulfillment:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.