
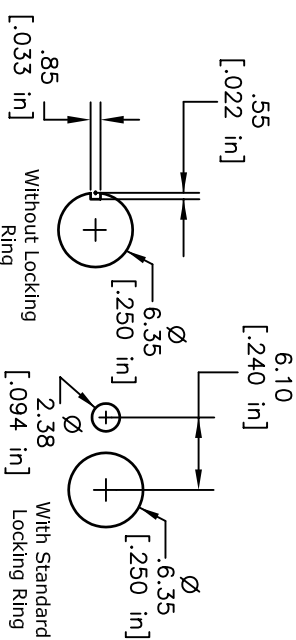



RECOMMENDED P.C.B. LAYOUT

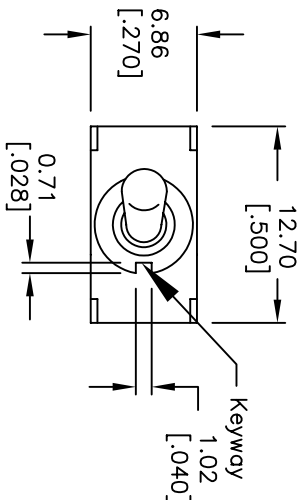

PANEL MOUNTING

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DN	DN	
DPEN	DPEN	2-1	

()=Momentary




CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC;
2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to +85°C
10. 2002/95/EC (ROHS) COMPLIANT.
11. HARDWARE TO BE SHIPPED BULK

T100000 - HEXNUT - QTY 2
T100011 - LOCKWASHER - QTY 1
T100015 - LOCKRING - QTY 1

12. ▲ DENOTES CRITICAL PARAMETER.

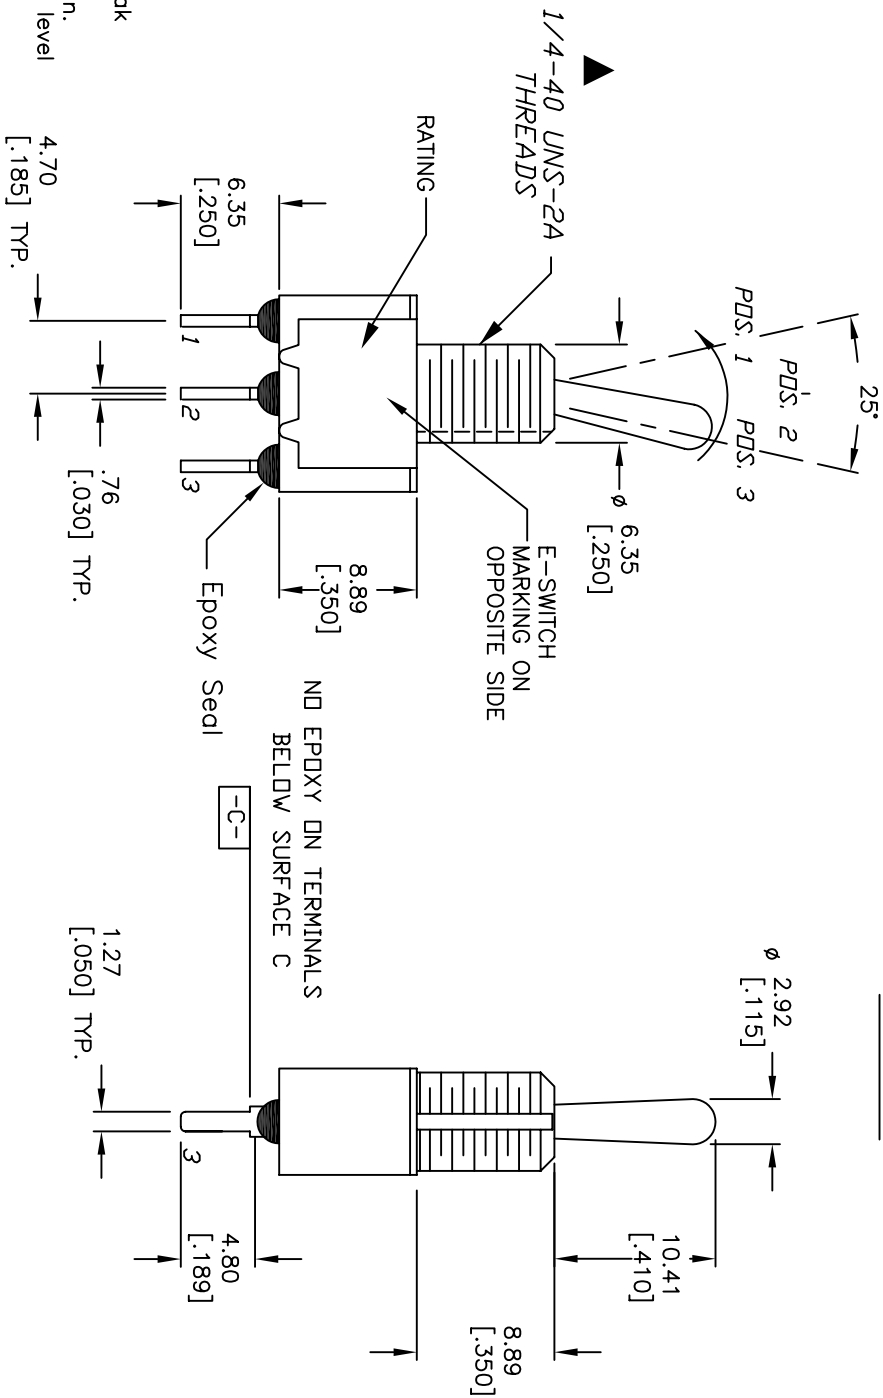

TITLE			
100SP5T1B1M2QE H			
REV.	ECN No.	DESCRIPTION	DATE
A	18437	RELEASE FOR PRODUCTION	3/13/09
		SCALE	DATE
		2:1	3/13/09
		DR	BLR
		DWG	ST115003
		REV	A