
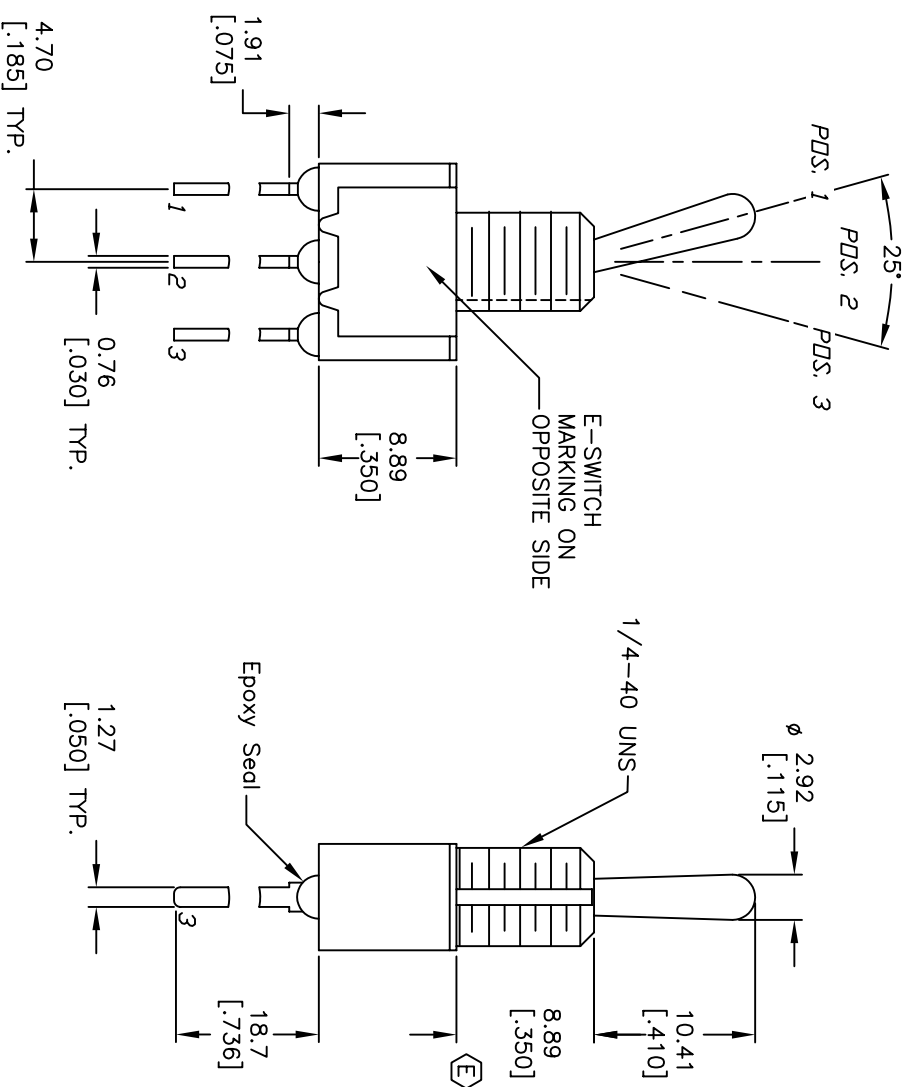


CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X= ± 0.4
X.XX= ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4 (VA) max. @20V AC or DC
5. FIXED TERM. & MOVING CONTACT: Copper Alloy W/Gold
Plate over Ni Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C
10. 2002/95/EC (ROHS) COMPLIANT
11. HARDWARE TO BE SHIPPED BULK:
T100011-LOCK WAHER QTY-1
T100015-LOCK RING QTY-1
T100000-HEX NUT QTY-2

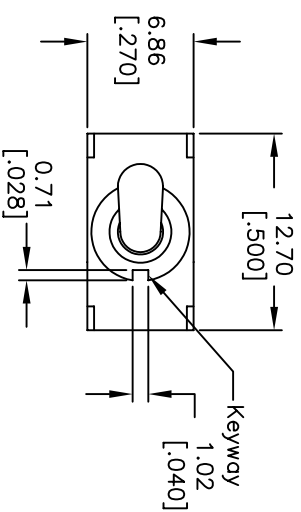

					E-SWITCH®				
					TITLE				
A	15483	RELEASED FOR PRODUCTION	11/1/05	PH	100SP1T1BIMS1REH				
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									
SCALE		DATE		DWG	REV				
2:1		11/1/05		PH	ST110014		A		