

## TC74VHCU04F, TC74VHCU04FN, TC74VHCU04FT

## HEX INVERTER

The TC74VHCU04 is an advanced high speed CMOS INVERTER fabricated with silicon gate C<sup>2</sup>MOS technology. It achieves the high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation.


Since the internal circuit is composed of a single stage inverter, it can be used in analog applications such as crystal oscillators.

An input protection circuit ensures that 0 to 7V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5V to 3V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.


## FEATURES:

- High Speed.....  $t_{pd} = 3.5\text{ns}(\text{typ.})$  at  $V_{CC} = 5\text{V}$
- Low Power Dissipation.....  $I_{CC} = 2\mu\text{A}(\text{Max.})$  at  $T_a = 25^\circ\text{C}$
- High Noise Immunity.....  $V_{NIH} = V_{NIL} = 10\% V_{CC} (\text{Min.})$
- Power Down Protection is provided on all inputs.
- Balanced Propagation Delays.....  $t_{PLH} \approx t_{PHL}$
- Wide Operating Voltage Range.....  $V_{CC} (\text{opr}) = 2\text{V} \sim 5.5\text{V}$
- Low Noise .....  $V_{OLP} = 0.8\text{V} (\text{Max.})$
- Pin and Function Compatible with 74ALS04


## IEC LOGIC SYMBOL

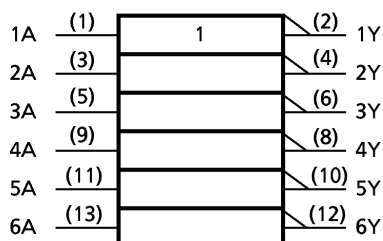


(Note) The JEDEC SOP (FN) is not available in Japan.



F (SOP14-P-300-1.27)  
Weight : 0.18g (Typ.)




FN (SOL14-P-150-1.27)  
Weight : 0.12g (Typ.)



FT (TSSOP14-P-0044-0.65)  
Weight : 0.06g (Typ.)

## PIN ASSIGNMENT

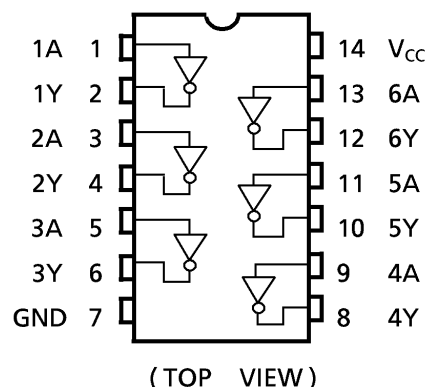

## TRUTH TABLE

| A | Y |
|---|---|
| L | H |
| H | L |

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER                   | SYMBOL    | VALUE                    | UNIT               |
|-----------------------------|-----------|--------------------------|--------------------|
| Supply Voltage Range        | $V_{CC}$  | $-0.5 \sim 7.0$          | V                  |
| DC Input Voltage            | $V_{IN}$  | $-0.5 \sim 7.0$          | V                  |
| DC Output Voltage           | $V_{OUT}$ | $-0.5 \sim V_{CC} + 0.5$ | V                  |
| Input Diode Current         | $I_{IK}$  | $-20$                    | mA                 |
| Output Diode Current        | $I_{OK}$  | $\pm 20$                 | mA                 |
| DC Output Current           | $I_{OUT}$ | $\pm 25$                 | mA                 |
| DC $V_{CC}$ /Ground Current | $I_{CC}$  | $\pm 50$                 | mA                 |
| Power Dissipation           | $P_D$     | 180                      | mW                 |
| Storage Temperature         | $T_{stg}$ | $-65 \sim 150$           | $^{\circ}\text{C}$ |

## RECOMMENDED OPERATING CONDITIONS

| PARAMETER             | SYMBOL    | VALUE         | UNIT               |
|-----------------------|-----------|---------------|--------------------|
| Supply Voltage        | $V_{CC}$  | 2.0~5.5       | V                  |
| Input Voltage         | $V_{IN}$  | 0~5.5         | V                  |
| Output Voltage        | $V_{OUT}$ | 0~ $V_{CC}$   | V                  |
| Operating Temperature | $T_{opr}$ | $-40 \sim 85$ | $^{\circ}\text{C}$ |

## DC ELECTRICAL CHARACTERISTICS

| PARAMETER                   | SYMBOL   | TEST CONDITION                   |                                                  | $V_{CC}$<br>(V)   | $T_a = 25^{\circ}\text{C}$  |                   |                             | $T_a = -40 \sim 85^{\circ}\text{C}$ |                             | UNIT          |
|-----------------------------|----------|----------------------------------|--------------------------------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------------------------|-----------------------------|---------------|
|                             |          |                                  |                                                  |                   | MIN.                        | TYP.              | MAX.                        | MIN.                                | MAX.                        |               |
| High - Level Input Voltage  | $V_{IH}$ | $V_{OUT} = V_{OL}$               |                                                  | 2.0<br>3.0~5.5    | 1.70<br>$V_{CC} \times 0.8$ | —<br>—            | —<br>—                      | 1.70<br>$V_{CC} \times 0.8$         | —<br>—                      | V             |
| Low - Level Input Voltage   | $V_{IL}$ | $V_{OUT} = V_{OH}$               |                                                  | 2.0<br>3.0~5.5    | —<br>—                      | —<br>—            | 0.30<br>$V_{CC} \times 0.2$ | —<br>$V_{CC} \times 0.2$            | 0.30<br>$V_{CC} \times 0.2$ | V             |
| High - Level Output Voltage | $V_{OH}$ | $V_{IN} = V_{IL}$                | $I_{OH} = -50\mu\text{A}$                        | 2.0<br>3.0<br>4.5 | 1.8<br>2.7<br>4.0           | 2.0<br>3.0<br>4.5 | —<br>—<br>—                 | 1.8<br>2.7<br>4.0                   | —<br>—<br>—                 | V             |
|                             |          | $V_{IN} = \text{GND}$            | $I_{OH} = -4\text{mA}$<br>$I_{OH} = -8\text{mA}$ | 3.0<br>4.5        | 2.58<br>3.94                | —<br>—            | —<br>—                      | 2.48<br>3.80                        | —<br>—                      |               |
| Low - Level Output Voltage  | $V_{OL}$ | $V_{IN} = V_{IH}$                | $I_{OL} = 50\mu\text{A}$                         | 2.0<br>3.0<br>4.5 | —<br>—<br>—                 | 0.0<br>0.0<br>0.0 | 0.2<br>0.3<br>0.5           | —<br>—<br>—                         | 0.2<br>0.3<br>0.5           | V             |
|                             |          | $V_{IN} = V_{CC}$                | $I_{OL} = 4\text{mA}$<br>$I_{OL} = 8\text{mA}$   | 3.0<br>4.5        | —<br>—                      | —<br>—            | 0.36<br>0.36                | —<br>—                              | 0.44<br>0.44                |               |
| Input Leakage Current       | $I_{IN}$ | $V_{IN} = 5.5\text{V or GND}$    |                                                  | 0~5.5             | —                           | —                 | $\pm 0.1$                   | —                                   | $\pm 1.0$                   | $\mu\text{A}$ |
| Quiescent Supply Current    | $I_{CC}$ | $V_{IN} = V_{CC} \text{ or GND}$ |                                                  | 5.5               | —                           | —                 | 2.0                         | —                                   | 20.0                        |               |

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

AC ELECTRICAL CHARACTERISTICS ( Input  $t_r = t_f = 3\text{ns}$  )

| PARAMETER                     | SYMBOL                               | TEST CONDITION |                     | Ta = 25°C |      |      | Ta = − 40~85°C |      | UNIT |      |
|-------------------------------|--------------------------------------|----------------|---------------------|-----------|------|------|----------------|------|------|------|
|                               |                                      |                | V <sub>CC</sub> (V) | CL (pF)   | MIN. | TYP. | MAX.           | MIN. |      | MAX. |
| Propagation Delay Time        | t <sub>pLH</sub><br>t <sub>pHL</sub> |                | 3.3 ± 0.3           | 15        | —    | 5.0  | 8.9            | 1.0  | 10.5 | ns   |
|                               |                                      |                |                     | 50        | —    | 7.5  | 11.4           | 1.0  | 13.0 |      |
|                               |                                      |                | 5.0 ± 0.5           | 15        | —    | 3.5  | 5.5            | 1.0  | 6.5  |      |
|                               |                                      |                |                     | 50        | —    | 5.0  | 7.0            | 1.0  | 8.0  |      |
| Input Capacitance             | C <sub>I N</sub>                     |                |                     |           | —    | 5    | 10             | —    | 10   | pF   |
| Power Dissipation Capacitance | C <sub>PD</sub>                      | (Note 1)       |                     |           | —    | 9    | —              | —    | —    |      |

Note (1) C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.


Average operating current can be obtained by the equation :

$$I_{CC(opr.)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC} / 6 \text{ ( per Gate )}$$

NOISE CHARACTERISTICS ( Input  $t_r = t_f = 3\text{ns}$  )


| PARAMETER                                    | SYMBOL           | TEST CONDITION        |     | Ta = 25°C           |              | UNIT |
|----------------------------------------------|------------------|-----------------------|-----|---------------------|--------------|------|
|                                              |                  |                       |     | V <sub>CC</sub> (V) | TYP.    MAX. |      |
| Quiet Output Maximum Dynamic V <sub>OL</sub> | V <sub>OLP</sub> | C <sub>L</sub> = 50pF | 5.0 | 0.5                 | 0.8          | V    |
| Quiet Output Minimum Dynamic V <sub>OL</sub> | V <sub>OLV</sub> | C <sub>L</sub> = 50pF | 5.0 | -0.5                | -0.8         | V    |
| Minimum High Level Dynamic Input Voltage     | V <sub>IHD</sub> | C <sub>L</sub> = 50pF | 5.0 | —                   | 4.0          | V    |
| Maximum Low Level Dynamic Input Voltage      | V <sub>ILD</sub> | C <sub>L</sub> = 50pF | 5.0 | —                   | 1.0          | V    |

## INTERNAL EQUIVALENT CIRCUIT

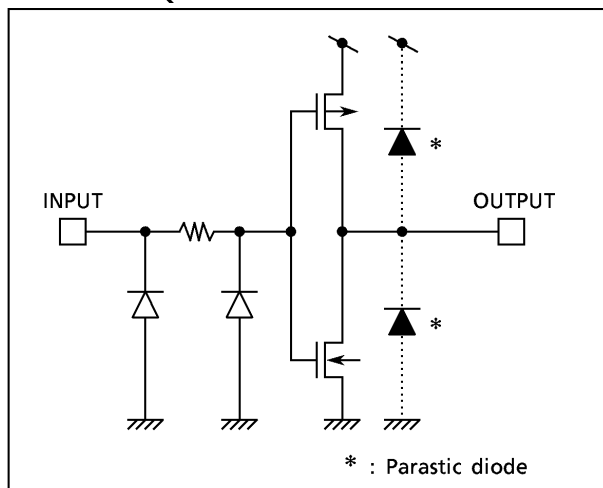

## SOP 14PIN (200mil BODY) OUTLINE DRAWING (SOP14-P-300-1.27)

Unit in mm

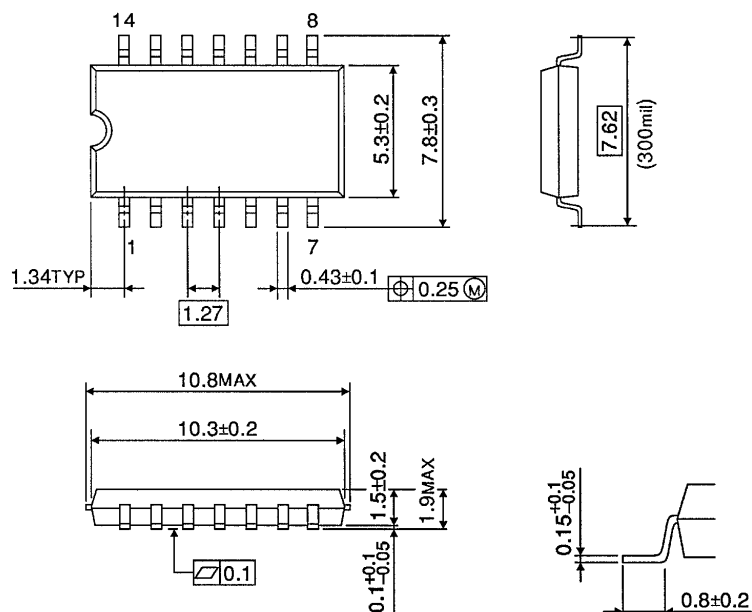


Weight : 0.18g (Typ.)

## SOP 14PIN (150mil BODY) OUTLINE DRAWING (SOP14-P-150-1.27)

Unit in mm

(Note) This package is not available in Japan.

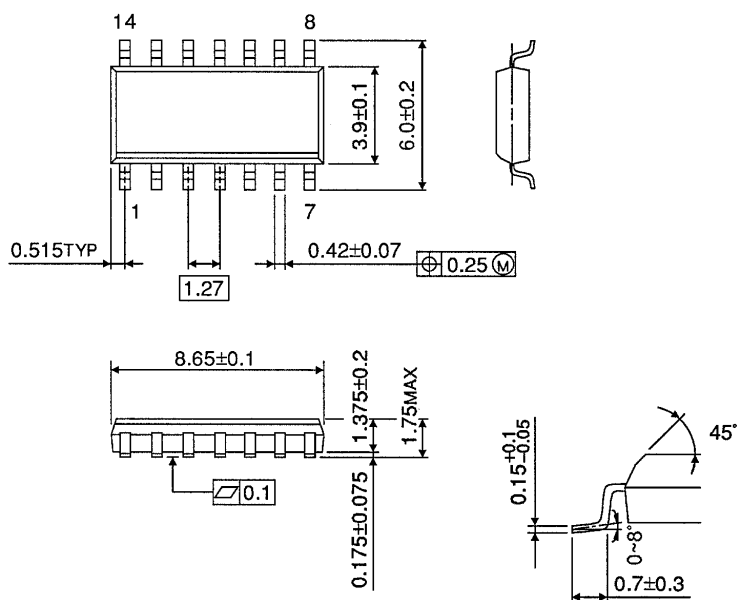

Weight : 0.12g (Typ.)

**TSSOP 14PIN OUTLINE DRAWING (TSSOP14-P-0044-0.65)**

Unit in mm

