


FEATURES

- Max. propagation delay of 1300ps
- IEE min. of -63mA
- Industry standard 100K ECL levels
- Extended supply voltage option:
VEE = -4.2V to -5.5V
- Voltage and temperature compensation for improved noise immunity
- Internal 75KΩ input pull-down resistors
- 70% faster than Fairchild
- 40% lower power than Fairchild
- Function and pinout compatible with Fairchild F100K
- Available in 24-pin CERPACK and 28-pin PLCC packages


BLOCK DIAGRAM

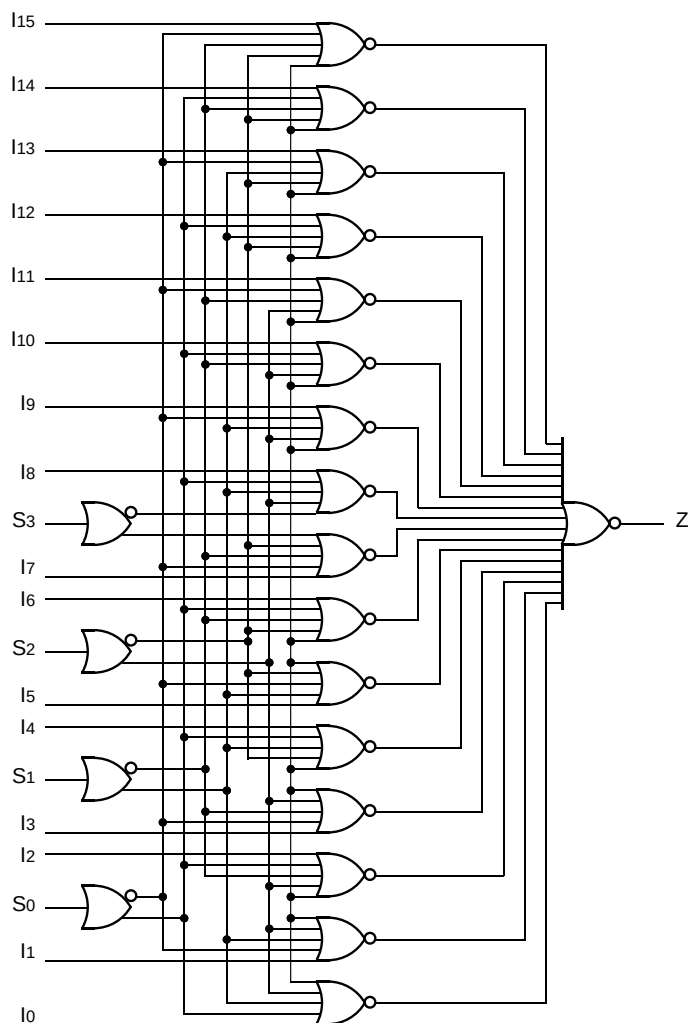

DESCRIPTION

The SY100S364 is a 16-input multiplexer designed for use in high-performance ECL systems. The four Data Select inputs (S0, S1, S2, S3) determine the bit from the 16 inputs (I_n) that will be passed on to the output as shown in the Truth Table. The output data polarity is the same as the input. The inputs on the device have 75KΩ pull-down resistors.

PIN CONFIGURATIONS

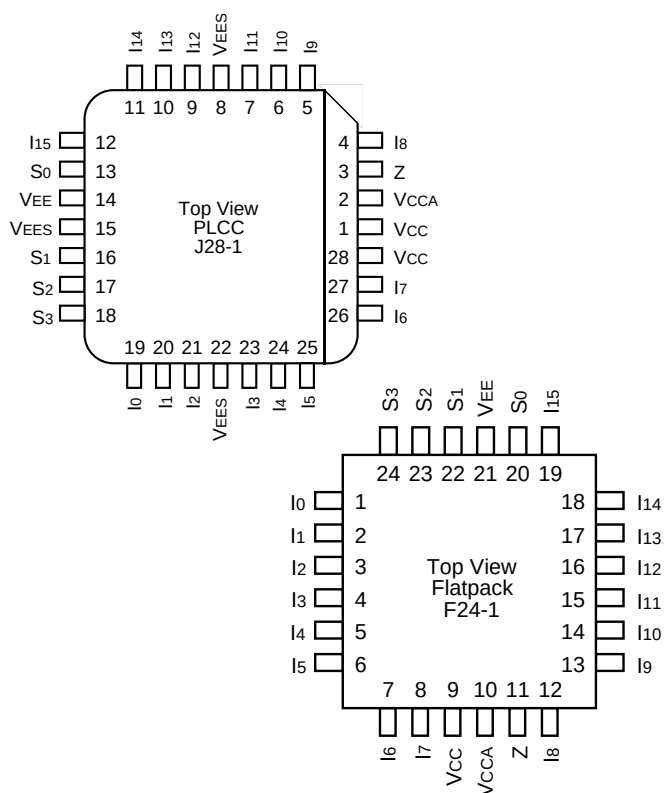

PIN NAMES

Pin	Function
I0 – I15	Data Inputs
S0 – S3	Select Inputs
Z	Data Output
VEES	VEE Substrate
VCCA	Vcco for ECL Outputs

TRUTH TABLE⁽¹⁾

Select Inputs				Output
S0	S1	S2	S3	Z
L	L	L	L	I0
H	L	L	L	I1
L	H	L	L	I2
H	H	L	L	I3
L	L	H	L	I4
H	L	H	L	I5
L	H	H	L	I6
H	H	H	L	I7
L	L	L	H	I8
H	L	L	H	I9
L	H	L	H	I10
H	H	L	H	I11
L	L	H	H	I12
H	L	H	H	I13
L	H	H	H	I14
H	H	H	H	I15

NOTE:

1. H = HIGH Voltage Level

L = LOW Voltage Level

DC ELECTRICAL CHARACTERISTICS

VEE = –4.2V to –5.5V unless otherwise specified; VCC = VCCA = GND

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
I _{IH}	Input HIGH Current I _n S0, S1 S2, S3	—	—	200 200 200	μA	V _{IN} = V _{IH} (Max.)
I _{EE}	Power Supply Current	–63	–45	–30	mA	Inputs Open

AC ELECTRICAL CHARACTERISTICS

CERPACK

VEE = –4.2V to –5.5V unless otherwise specified; VCC = VCCA = GND

Symbol	Parameter	T _A = 0°C		T _A = +25°C		T _A = +85°C		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.		
t _{PLH} t _{PHL}	Propagation Delay I0 – I15 to Output	400	1400	400	1400	400	1400	ps	
t _{PLH} t _{PHL}	Propagation Delay S0, S1 to Output	400	1900	400	1900	400	1900	ps	
t _{PLH} t _{PHL}	Propagation Delay S2, S3 to Output	400	1700	400	1700	400	1700	ps	
t _{TLH} t _{THL}	Transition Time 20% to 80%, 80% to 20%	300	900	300	900	300	900	ps	


AC ELECTRICAL CHARACTERISTICS

PLCC

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_A = 0^{\circ}C$		$T_A = +25^{\circ}C$		$T_A = +85^{\circ}C$		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay $I_0 - I_{15}$ to Output	400	1300	400	1300	400	1300	ps	
t_{PLH} t_{PHL}	Propagation Delay S_0, S_1 to Output	400	1800	400	1800	400	1800	ps	
t_{PLH} t_{PHL}	Propagation Delay S_2, S_3 to Output	400	1600	400	1600	400	1600	ps	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	300	900	300	900	300	900	ps	

TIMING DIAGRAM

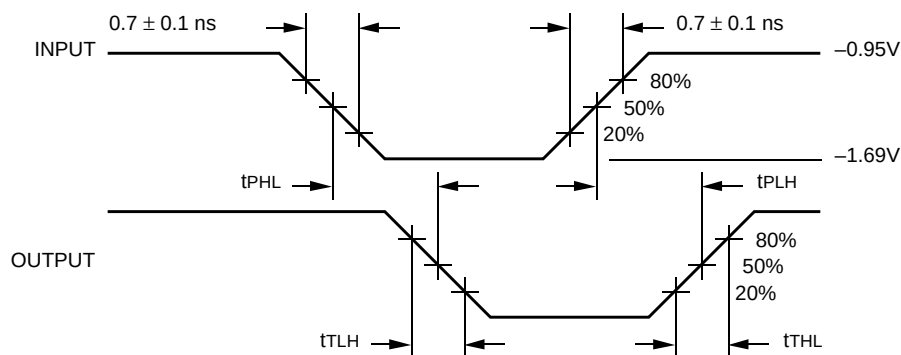

Propagation Delay and Transition Times


NOTE:

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

PRODUCT ORDERING CODE

Ordering Code	Package Type	Operating Range
SY100S364FC	F24-1	Commercial
SY100S364JC	J28-1	Commercial
SY100S364JCTR	J28-1	Commercial

24 LEAD CERPACK (F24-1)

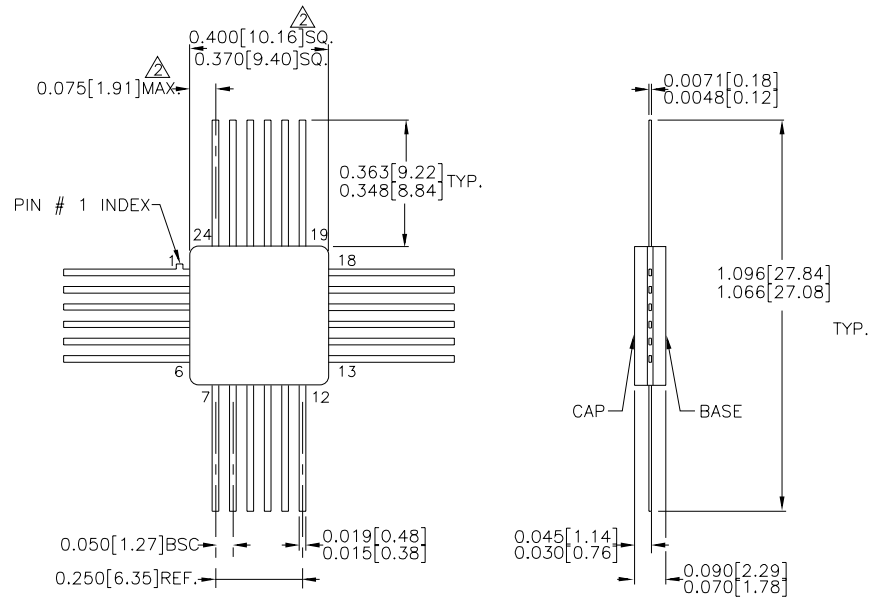


NOTES:

1. DIMENSIONS ARE IN INCHES[MM].
2. THIS DIMENSION INCLUDES GLASS PROTRUSION AND CAP TO BASE ALIGNMENT TOLERANCES.
3. DIMENSIONS SHOWN ARE MAX/MIN, WHERE NOTED.

Rev. 03

28 LEAD PLCC (J28-1)

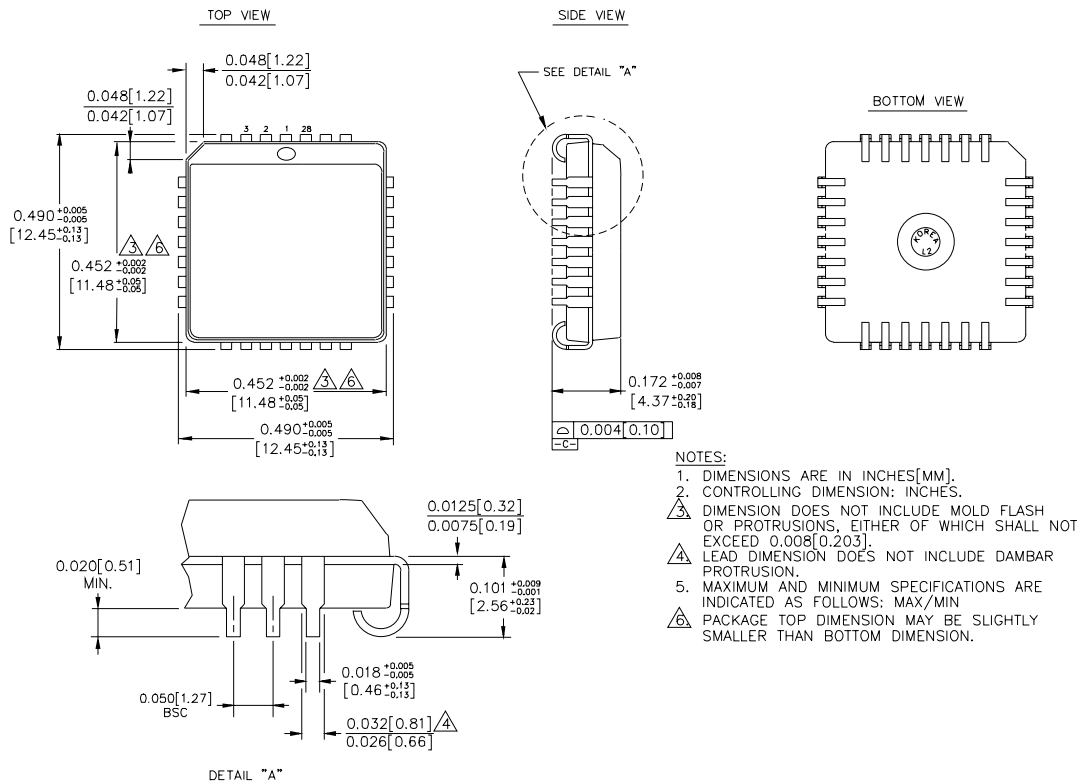

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated