


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- Low reverse current
- High surge current capability
- High current capability
- Component in accordance to RoHS 2002/95/EC

MECHANICAL DATA

- Case: DO-41
- Case Material: Molded plastic, UL Flammability classification rating 94V-0
- Terminals: Lead free plating (Tin Finish) Solderable per MIL-STD-202, Method 208
- Polarity: Cathode band
- Weight: 0.318 grams(approximate)

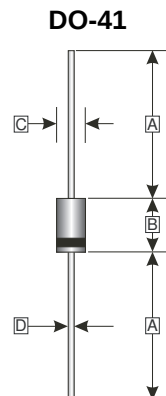

REF.	Millimeter	
	Min.	Max.
A	25.4 (TYP)	
B	4.10	5.21
C	2.00	2.72
D	0.70	0.90

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

PARAMETER		SYMBOL	TYPE NUMBER							UNIT
			1N 4001G	1N 4002G	1N 4003G	1N 4004G	1N 4005G	1N 4006G	1N 4007G	
Repetitive Peak Reverse Voltage (Max.)		V _{RRM}	50	100	200	400	600	800	1000	V
RMS Voltage (Max.)		V _{RMS}	35	70	140	280	420	560	700	V
DC Blocking Voltage (Max.)		V _{DC}	50	100	200	400	600	800	1000	V
Average Forward Rectified Current (Max.)		I _F	1.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load		I _{FSM}	30							A
Instantaneous Forward Voltage at 1.0A (Max.)		V _F	1.10							V
DC Reverse Current at Rated	T _A = 25℃	I _R	5.0							μA
DC Blocking Voltage (Max.)	T _A = 100℃		50							
Typical Junction Capacitance ¹		C _J	15				10			pF
Typical Thermal Resistance		R _{θJA}	100							℃ /W
Operating, Storage temperature		T _J , T _{STG}	-55 ~ +125, -55~150							℃

Notes: 1. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

RATINGS AND CHARACTERISTIC CURVES (1N4001G ~ 1N4007G)

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

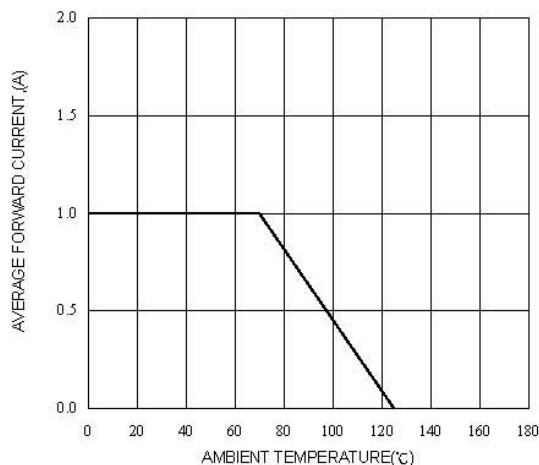


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

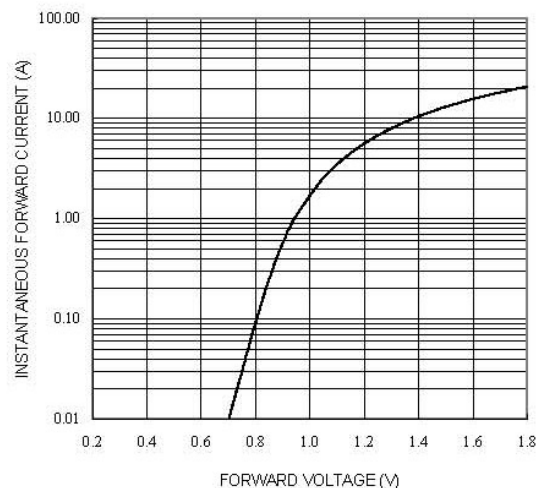


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT



FIG. 5-TYPICAL REVERSE CHARACTERISTICS

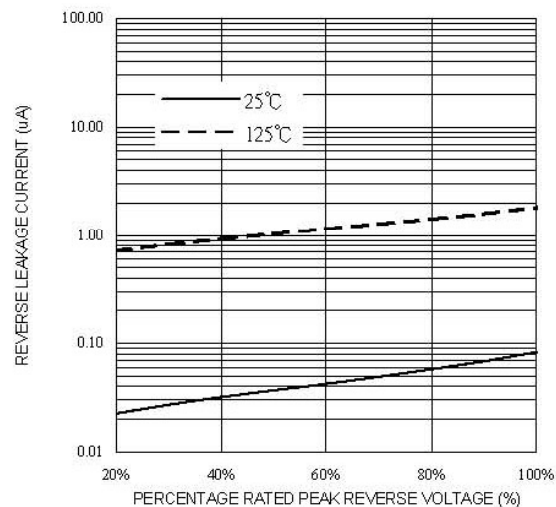


FIG. 4-TYPICAL JUNCTION CAPACITANCE

