


TG70 Connector Strap Wrench with 3/8" Square Drive

Connector strap wrench

How To Order

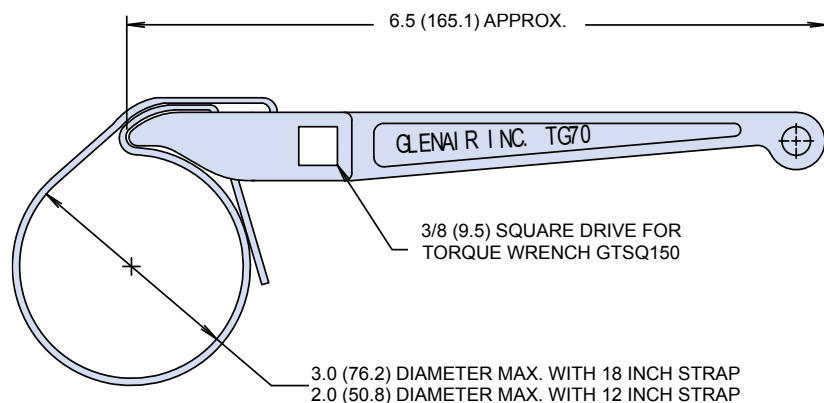

Basic
Number

TG70

Torque Wrench
(Omit for None)

P - 18

Strap Length in inches
Available in 12 and
18 inches. Omit for
standard 12 inches

Variance Chart

TG70 Strap Wrench used with Glenair Torque Wrenches

Accessory Shell Size	Recommended Installation Torque			
	Light/Medium Duty ±5 inch pounds		Heavy Duty ±5 inch pounds	
	TG70 Torque	Part Torque	TG70 Torque	Part Torque
08/09	28	35	45	60
10/11	28	35	70	80
12/13	30	40	75	110 [80]
14/15	30	40	75	120 [80]
16/17	30	40	75	120 [80]
18/19	30	40	75	120 [80]
20/21	75	80	95	140 [100]
22/23	75	80	120*	140
24/25	75	80	120*	140
28			135*	150
32			150*	150
36			150*	150

*TG70 not recommended for values of 120 inch lbs. or greater.

Variance Chart Notes:

Recommended installation torque is approximately 80% of MIL-C-85049 accessory thread strength values.

Heavy duty installation torque values may be difficult to attain with the TG70 Strap Wrench; the values shown in brackets [] are the maximum attainable with the TG70 Strap Wrench.

Glenair recommends using 600 series torque tools whenever possible when torque loading exceeds 75 inch pounds, or to attain the heavy duty torque values shown.

Material and Finish:

Wrench Handle: Aluminum Alloy/Nickel Plate

Wedge: Stainless Steel/Passivated

Strap: Impregnated Fabric

Notes:

Replacement Straps are available. Specify part number G70515-XX for 12 or 18 inch strap.

Not recommended for composite coupling nuts. Use 600-091 or 600-157.

Double wrap for heavy duty range