

SMD Power Inductor CDRH70D43D



 **sumida**

Under Development

RoHS

**Halogen
Free**



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 7.3 × 7.3 × 4.5 mm Max.
- Product weight: 0.75g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging


Applications

- Ideally used in Hard disk-related, power supply for TV and game machine etc.

Dimension - [mm]

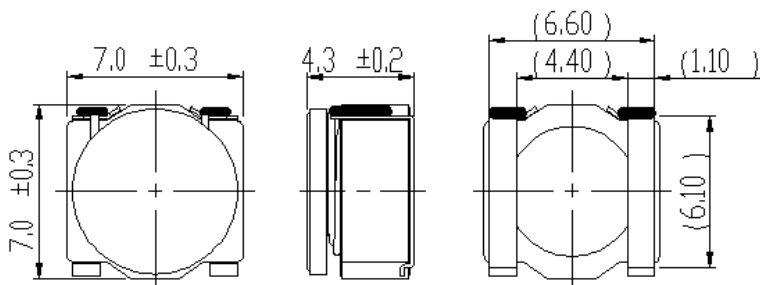

Land pattern and Schematics - [mm]

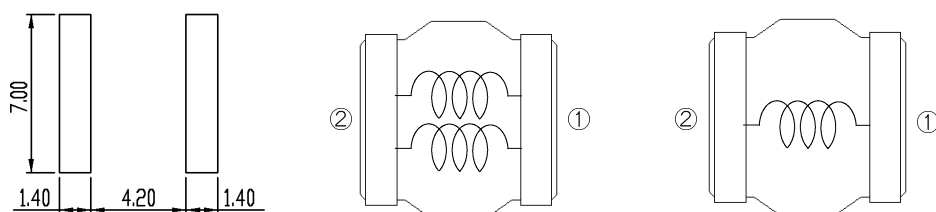

SMD Power Inductor CDRH70D43D



Under Development

Electrical Characteristics


Part Name	Stamp	Inductance (uH) [within] ※ 1	D.C.R. (mΩ) [Max.] (Typ.)	Saturation current (A) ※ 2		Temperature rise Current (A) ※ 3
				at 20°C	at 105°C	
CDRH70D43DNP-2R0PC	2R0	2.0 μH ± 25%	14.4(11.5)	6.60	5.50	7.60
CDRH70D43DNP-3R6PC	3R6	3.6 μH ± 25%	19.4(15.5)	4.80	4.00	6.00
CDRH70D43DNP-4R7PC	4R7	4.7 μH ± 25%	23.8(19)	4.20	3.30	5.20
CDRH70D43DNP-7R5MC	7R5	7.5 μH ± 20%	35.0(28)	3.50	2.80	4.00
CDRH70D43DNP-100MC	100	10.0 μH ± 20%	42.5(34)	2.90	2.40	3.60
CDRH70D43DNP-150MC	150	15.0 μH ± 20%	63.1(50.5)	2.40	2.00	2.70
CDRH70D43DNP-220MC	220	22.0 μH ± 20%	85(68)	2.00	1.65	2.25
CDRH70D43DNP-330MC	330	33.0 μH ± 20%	105(84)	1.60	1.35	2.15
CDRH70D43DNP-470MC	470	47.0 μH ± 20%	155(124)	1.30	1.10	1.65
CDRH70D43DNP-680MC	680	68.0 μH ± 20%	241(193)	1.10	0.90	1.30
CDRH70D43DNP-101MC	101	100.0 μH ± 20%	362(290)	0.90	0.78	1.02

※ 1. Measuring condition: at 100kHz.

※ 2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.

※ 3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40°C (Ta=20°C).

SMD Power Inductor CDRH70D43D














sumida

Under Development

Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

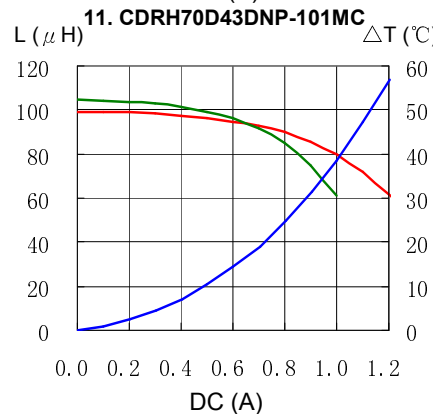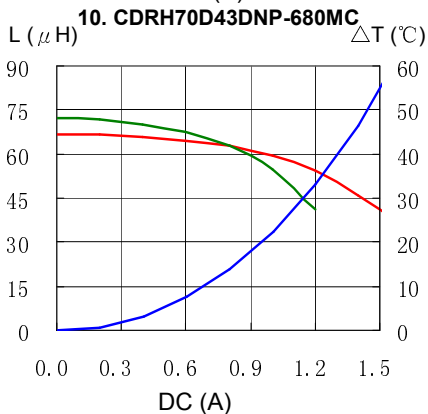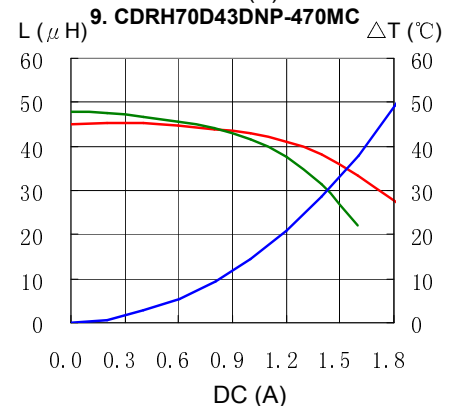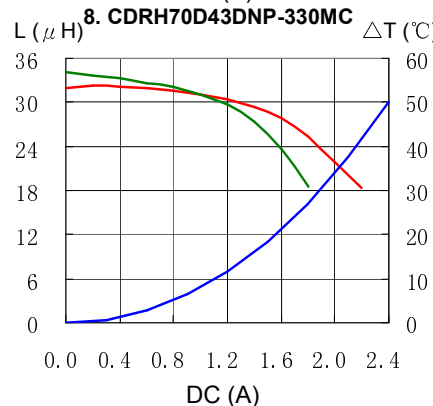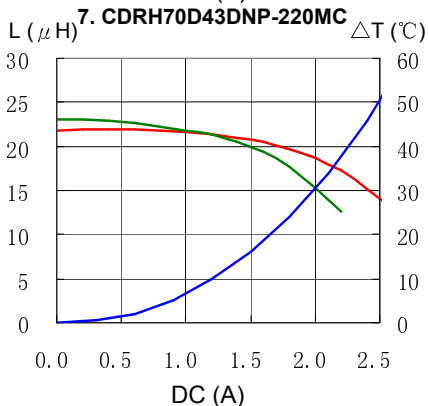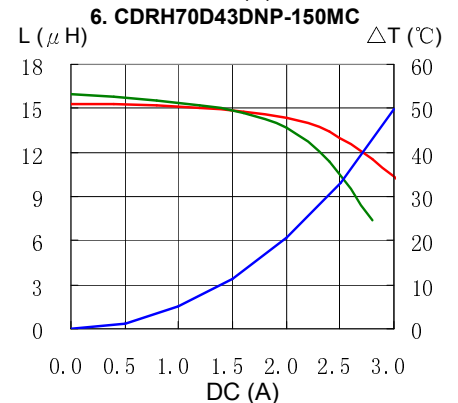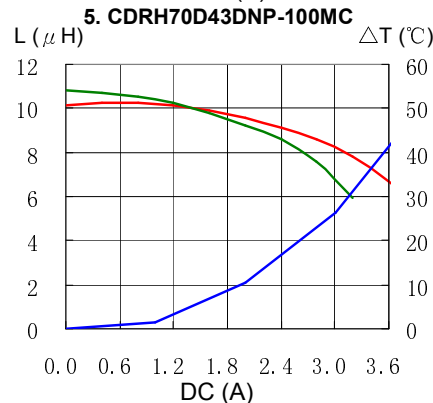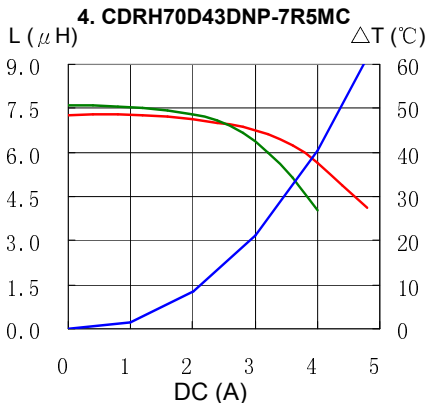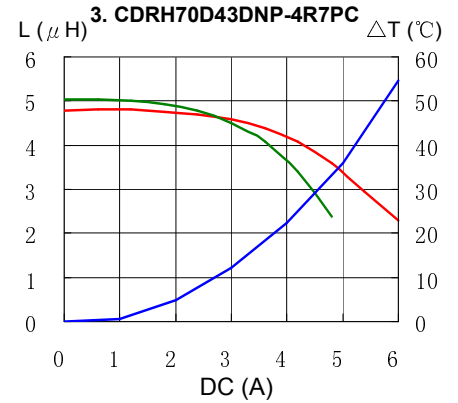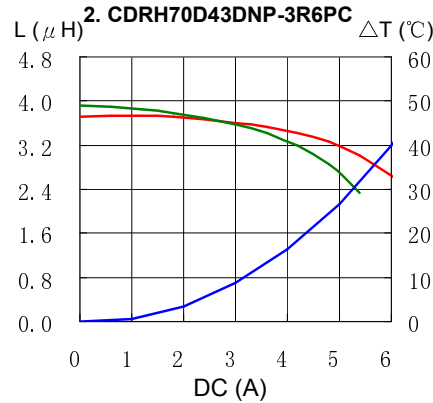
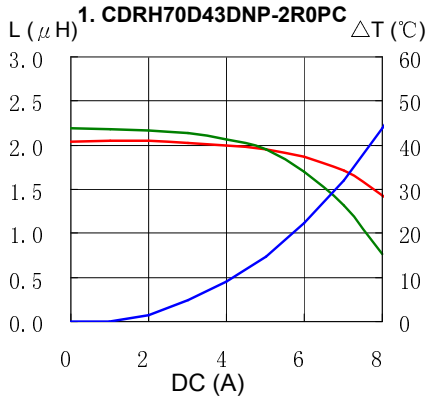


SMD Power Inductor CDRH70D43D



Under Development

Solder Reflow Condition

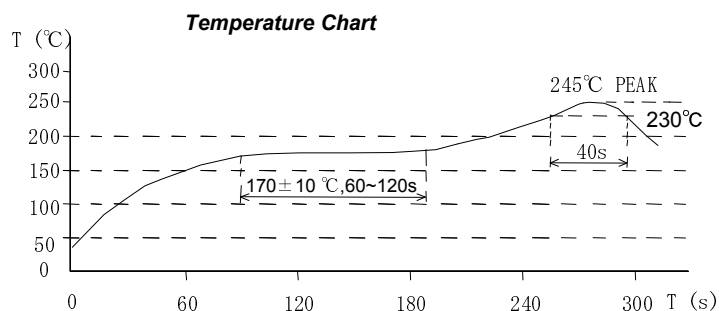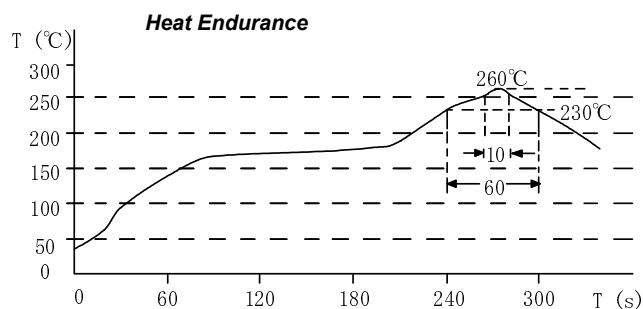

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com