



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- For general purpose applications
- These diodes features very low turn-on voltage and fast swithcing
These devices are protected by a PN junction guard ring against
excessive voltage.,such as electrostatic discharges
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates
Compliant. See ordering information)

Maximum Ratings

Repetitive Peak Reverse Voltage	V_R	30V	
Forward Continuous Current at	I_F	200mA	$T_A=25^\circ\text{C}$
Repetitive Peak Forward Current	I_{FM}	300mA	$t_p<1\text{s}, \delta<0.5, T_A=25^\circ\text{C}$
Maximum Forward Surge Current	I_{FSM}	600mA	$t_p<10\text{mS}, T_A=25^\circ\text{C}$
Power Dissipation	P_{TOT}	200mW	$T_A=65^\circ\text{C}$
Junction Temperature	T_J	125°C	
Ambient Operating temperature Range	T_A	-55 to +125°C	
Storage Temperature Range	T_{STG}	-55 to +150°C	

Valid provided that leads at a distance of 4mm from case are kept at ambient temperature

Electrical Characteristics @ 25°C Unless Otherwise Specified


Maximum Forward Voltage $I_F = 0.1\text{mA}$ $I_F = 1\text{mA}$ $I_F = 10\text{mA}$ $I_F = 30\text{Ma (Typical)}$ $I_F = 100\text{mA}$	V_F	0.24V 0.32V 0.40V 0.50V 0.80V	Pulse Test $t_p<300, \delta<2\%$
Minimum Reverse Breakdown Voltages	$V_{(BR)R}$	30V	Tested with 100μA pulse
Maximum Leakage current	I_R	2.0μA	$V_R=25\text{V}$
Maximum Junction Capacitance	C_J	10pF	$V_R=1\text{V}, f=1\text{MHz}$
Maximum Reverse recovery time	t_{rr}	5.0ns	$I_F=10\text{mA}, I_R=10\text{mA}, I_R=1\text{mA}$
Maximum Thermal resistance junction to Ambient Air	$R_{\theta JA}$	300K/W	

Note:1.Lead in Glass Exemption Applied, see EU Directive Annex 5.

LL85


Small Signal Schottky Diodes

MINIMELF

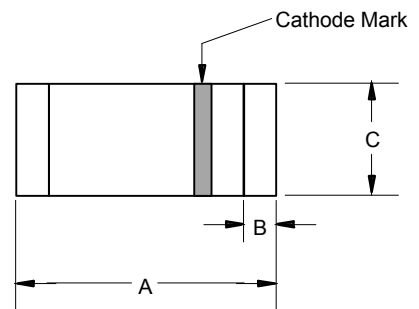

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.130	.146	3.30	3.70	
B	.008	.016	0.20	0.40	
C	.055	.059	1.40	1.50	

SUGGESTED SOLDER PAD LAYOUT

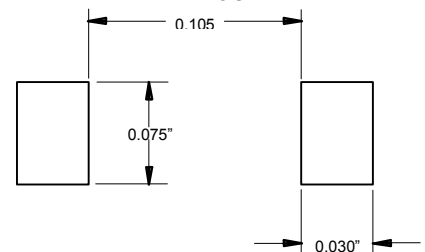

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 2.5Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.