

Class 2 UL5085-3 Transformer

40VA, Core 3/4", Inherently Energy Limited

Series: CL - Lead Wires & Quick-Connects

- Power Rating 40VA
- No Secondary Fusing Required
- Frequency 50/60Hz
- Insulation Class F (155°C)

Agency Approvals:

- UL/cUL 5085-3 Class 2 Recognized (File E49606)
- Insulation File No. E95662




Class 2   

* Multi voltage combinations are available - consult factory.


Lead Wires

Type HX Foot Mount - Steel bracket welded to the bottom of the laminations for easy mounting
Type GX Panel Mount - 0.179" (4.55 mm) diameter holes in each corner to allow direct mounting to a panel.
Lead Wires: All leads are 18 AWG stranded 2/64" (0.794 mm) insulation thickness. Standard parts have 12" (305 mm) total length with 1/2" (12.7 mm) strip.

Type HX - Foot Mount

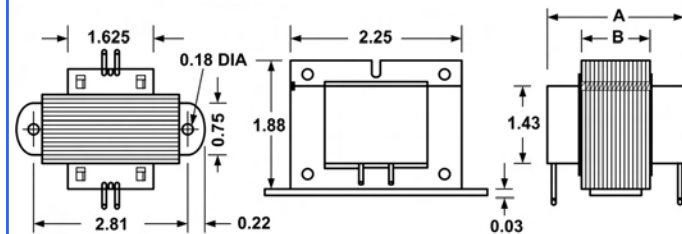


Type GX - Panel Mount

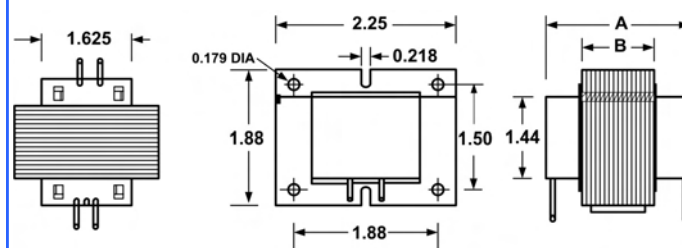


Quick-Connects

Type BB Foot Mount, Pri & Sec on Same Side - Quick connect terminals with line and load terminations on the same side of transformer.
Type AE Laydown, Pri & Sec on Top Side - Quick connect terminals with line and load terminations on the top of transformer.
Type AB Foot Mount Pri & Sec on Opposite Side - Quick connect terminals with line and load terminations on opposite sides of transformer
Terminals:
 Standard male quick connects - 0.250" x 0.032" (6.35 x 0.81 mm)
 Other available quick connects - 0.187" x 0.032" (4.75 x 0.81 mm)


Type BB - Foot Mount, Pri & Sec on Same Side

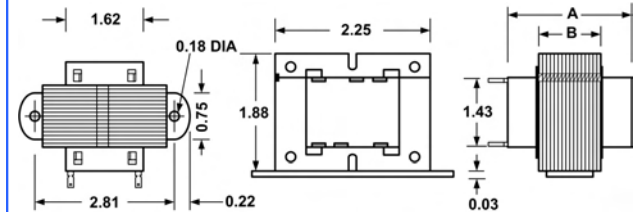

Type AE - Laydown, Pri & Sec on Top Side

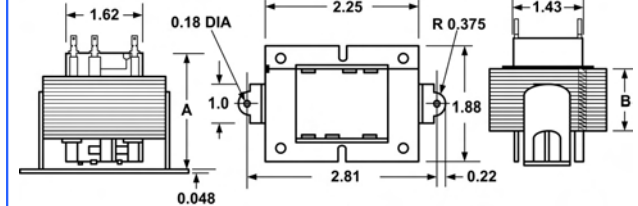

Type AB - Foot Mount, Pri & Sec on Opposite Side

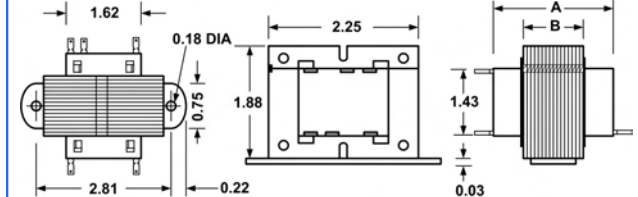

Dimensions (Inches)		40VA - V
A		2.410
B		1.250
Weight (Lbs)		0.710

Any application, Any requirement, Contact us for our Custom Designs



Sales Office:
 300 W Factory Road, Addison IL 60101 • Phone: (630) 628-9999 • Fax: (630) 628-9922 • www.wabashtransformer.com

Class 2 UL5085-3 Transformer
40VA, Core 3/4", Inherently Energy Limited
Series: CL - Lead Wires & Quick-Connects

Class 2   

Partial Selection Guide

Primary Voltage	Secondary Voltage	40 VA Size - 3/4" X 1-1/4"	UL	Primary Voltage	Secondary Voltage	40 VA Size - 3/4" X 1-1/4"	UL
208/230	24	CL40V00-000*	-	120/277	24	CL40V41-000*	-
120	24	CL40V01-000*	-	208/277/480	24	CL40V42-000*	-
277	24	CL40V02-000*	-	277/380/415	24	CL40V43-000*	-
120/208/240	24	CL40V03-000*	-	208/240/480	24	CL40V44-000*	-
480	24	CL40V04-000*	-	208	24	CL40V45-000*	-
600	24	CL40V06-000*	-	220/240	24	CL40V47-000*	-
120/240	24	CL40V07-000*	-	100	24	CL40V48-000*	✓
380	24	CL40V09-000*	-	220	24	CL40V49-000*	-
240	24	CL40V40-000*	-	115	24	CL40V51-000*	✓
208/240	24	CL40V15-000*	-		24	CL40V52-000*	-
	25	CL40V61-000*	-	346	24	CL40V53-000*	-
415	24	CL40V16-000*	-	208/230/460	24	CL40V54-000*	-
380/415	24	CL40V17-000*	-	400	24	CL40V55-000*	-
575	24	CL40V21-000*	-	575/600	24	CL40V56-000*	-
208/240/277	24	CL40V23-000*	-	200/230/460	24	CL40V58-000*	-
240/480	24	CL40V24-000*	-	230/460	24	CL40V59-000*	-
380/415/575	24	CL40V27-000*	-	380/460	24	CL40V60-000*	-
460	24	CL40V28-000*	-	115/230	24	CL40V62-000*	-
480/575	24	CL40V30-000*	-	230	24	CL40V63-000*	-
120/208/240/277	24	CL40V36-000*	-	240/277/480	24	CL40V64-000*	-

* Refer to page number 7. Must complete part number to specify voltages, termination, mounting & fusing.
 For custom designs 3 digit customer ID will be added at the end of the part number.

Lead Wire Details:

Primary Voltage	COM	110,115,120	200,208,215	220, 230, 240	265, 277	380	400, 415	460, 480	575	600
Color	Black	White	Red	Orange	Brown	Violet	Red/White	Grey	Black/Red	Black/White
Secondary Voltage	COM	12	24	Standard leads: All leads are 12.0" L.O.C (length out of coil) 1/2" strip						
Color	Blue	Yellow	Blue							

Any application, Any requirement, Contact us for our Custom Designs



Sales Office:
 300 W Factory Road, Addison IL 60101 • Phone: (630) 628-9999 • Fax: (630) 628-9922 • www.wabashtransformer.com