


**2.0 AMP GLASS PASSIVATED BRIDGE RECTIFIER**
**KBP PACKAGE**
**KBP201G**
**THRU**
**KBP208G**
**Pb Free Product**
**FEATURES**

- \* Ideal for printed circuit board
- \* Surge overload rating: 60 Amperes peak
- \* Mounting position: Any
- \* Weight: 0.15 grams
- \* RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"

**MECHANICAL DATA**

- \* UL listed the recognized component directory, file #E195711
- \* Epoxy: Device has UL flammability classification 94V-O

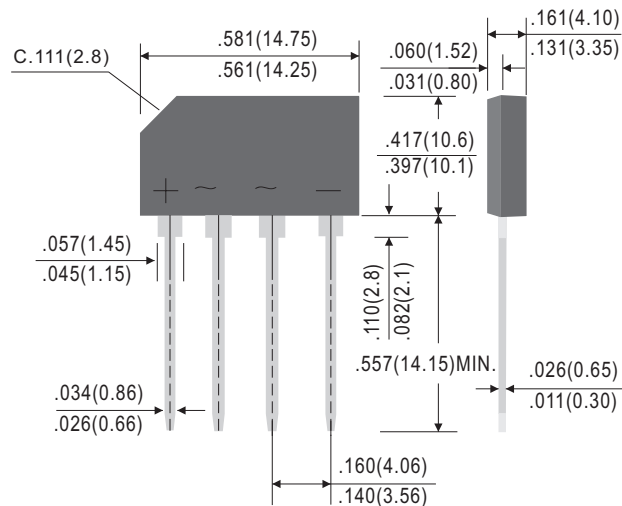

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

RATINGS	SYMBOL	KBP201G	KBP202G	KBP203G	KBP204G	KBP206G	KBP208G	UNIT
Marking Code		KBP201G	KBP202G	KBP203G	KBP204G	KBP206G	KBP208G	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	Volts
Maximum Average Forward Rectified Current at T <sub>c</sub> = 125°C	I <sub>O</sub>	2.0						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	60						Amps
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	32 / 13						°C/W
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	25						pF
Operating Temperature Range	T <sub>J</sub>	-55 to +150						°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150						°C

CHARACTERISTICS		SYMBOL	KBP201G	KBP202G	KBP203G	KBP204G	KBP206G	KBP208G	UNIT
Maximum Forward Voltage at 2.0A DC		V <sub>F</sub>	1.10						Volts
Maximum Average Reverse Current at	@T <sub>C</sub> =25°C	I <sub>R</sub>	5.0						μAmps
Rated DC Blocking Voltage	@T <sub>C</sub> =100°C		500						

NOTES :1. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

2. Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B with 0.47 x 0.47"(12 x 12mm)copper pads.

## RATING AND CHARACTERISTIC CURVES

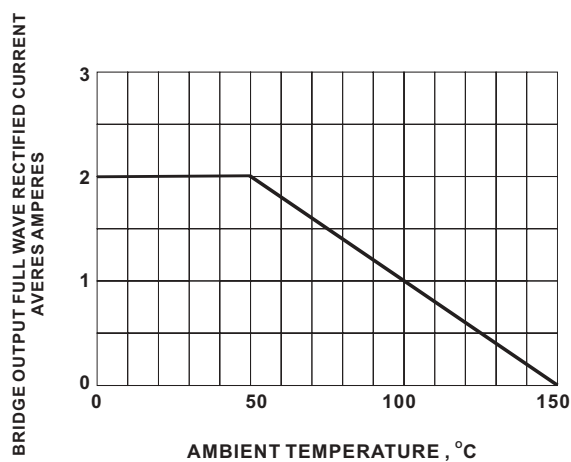


Fig.1 DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

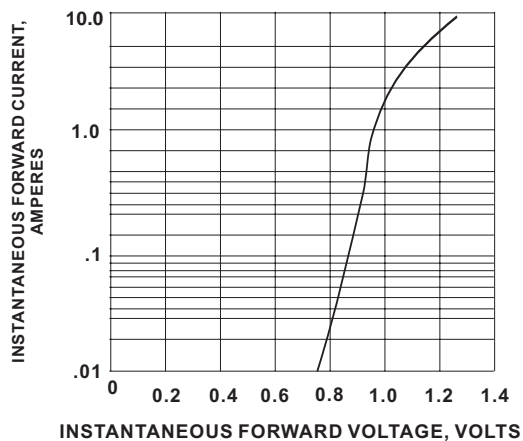


Fig.2 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

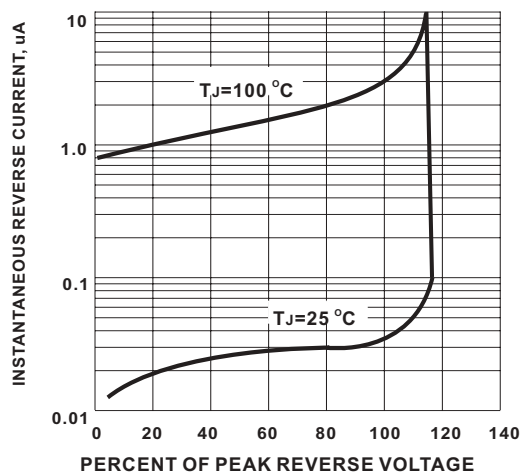


Fig.3 TYPICAL PEAK REVERSE CHARACTERISTICS

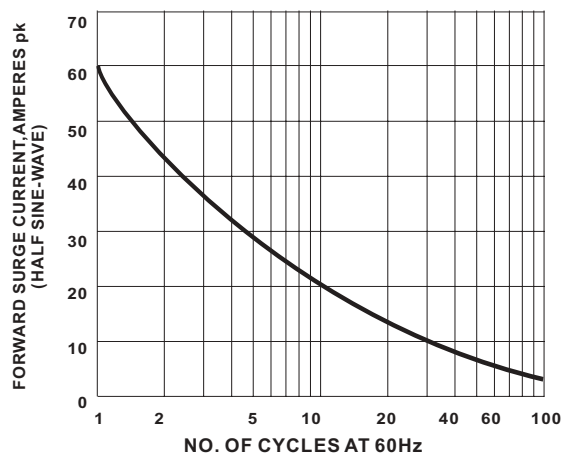


Fig.4 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT