

TIP112

NPN SILICON TRANSISTOR

NPN EPITAXIAL SILICON DARLINGTON TRANSISTOR

■ DESCRIPTION





The UTC **TIP112** is designed for such applications as: DC/DC converters supply line switching, battery charger, LCD backlighting, peripheral drivers, Driver in low supply voltage applications (e.g. lamps and LEDs) and inductive load driver (e.g. relays, buzzers and motors).

■ FEATURES

* High DC current gain : $h_{FE} = 1000$ @ $V_{CE}=4V$, $I_C=1A$ (Min)

* Low collector-emitter saturation voltage

- EQUIVALENT TEST ($R_1 \approx 10k\Omega$, $R_2 \approx 0.6k\Omega$)

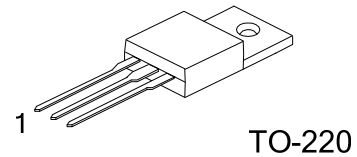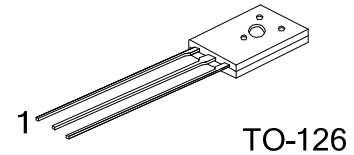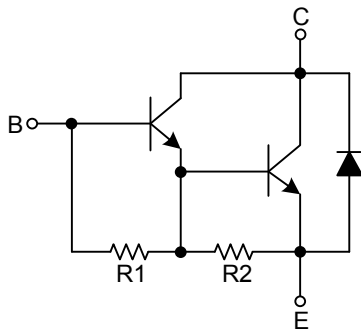

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
TIP112L-T60-K	TIP112G-T60-K	TO-126	E	C	B	Bulk
TIP112L-TA3-T	TIP112G-TA3-T	TO-220	B	C	E	Tube
TIP112L-TN3-R	TIP112G-TN3-R	TO-252	B	C	E	Tape Reel
TIP112L-TN3-T	TIP112G-TN3-T	TO-252	B	C	E	Tube

TIP112L-T60-K (1) Packing Type (2) Package Type (3) Lead Free	(1) K: Bulk, T: Tube, R: Tape Reel (2) T60: TO-126, TA3: TO-220, TN3: TO-252 (3) G: Halogen Free, L: Lead Free
---	---

■ ABSOLUTE MAXIMUM RATING ($T_C = 25^\circ\text{C}$, unless otherwise specified)







PARAMETER		SYMBOL	RATINGS	UNIT
Collector to Base Voltage		V_{CBO}	100	V
Collector to Emitter Voltage		V_{CEO}	100	V
Emitter to Base Voltage		V_{EBO}	5	V
Collector Current	DC	I_C	2	A
	Peak	I_{CM}	4	
Base Current (DC)		I_B	50	mA
Collector Dissipation	TO-126	P_C	10	W
	TO-220		40	
	TO-252		15	
Junction Temperature		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-65~+150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Emitter Breakdown Voltage	$V_{CEO(SUS)}$	$I_C=30\text{mA}$, $I_B=0\text{A}$	100			V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=2\text{A}$, $I_B=8\text{mA}$			2.5	V
Base-Emitter Turn-On Voltage	$V_{BE(ON)}$	$V_{CE}=4\text{V}$, $I_C=2\text{A}$			2.8	
Collector-Base Cut-Off Current	I_{CBO}	$V_{CB}=100\text{V}$, $I_E=0\text{A}$			1	mA
Collector-Emitter Cut-Off Current	I_{CEO}	$V_{CE}=50\text{V}$, $V_B=0\text{A}$			2	mA
Emitter-Base Cut-Off Current	I_{EBO}	$V_{EB}=5\text{V}$, $I_C=0\text{A}$			2	mA
DC Current Gain	h_{FE}	$V_{CE}=4\text{V}$, $I_C=1\text{A}$	1000			
		$V_{CE}=4\text{V}$, $I_C=2\text{A}$	500			
Collector Capacitance	C_{OB}	$V_{CB}=10\text{V}$, $I_E=0\text{A}$, $f=0.1\text{MHz}$			100	pF

TYPICAL CHARACTERISTICS

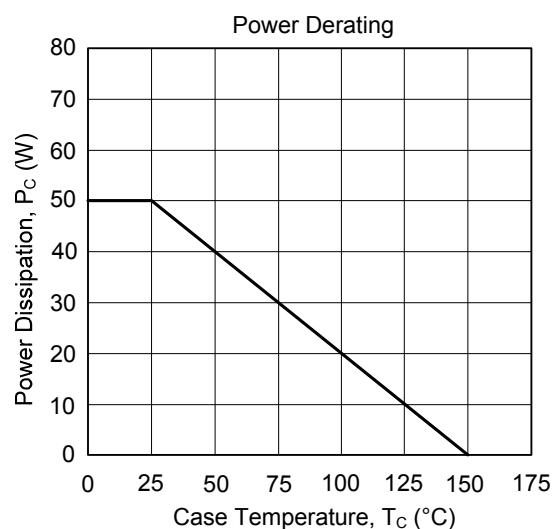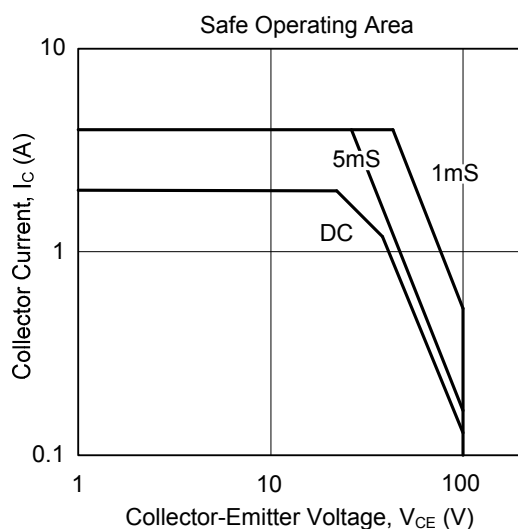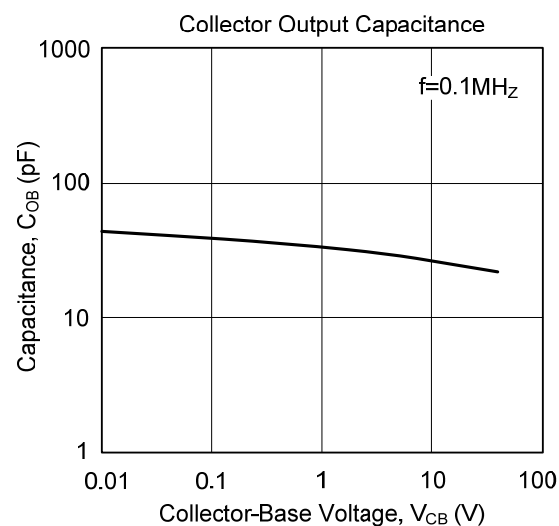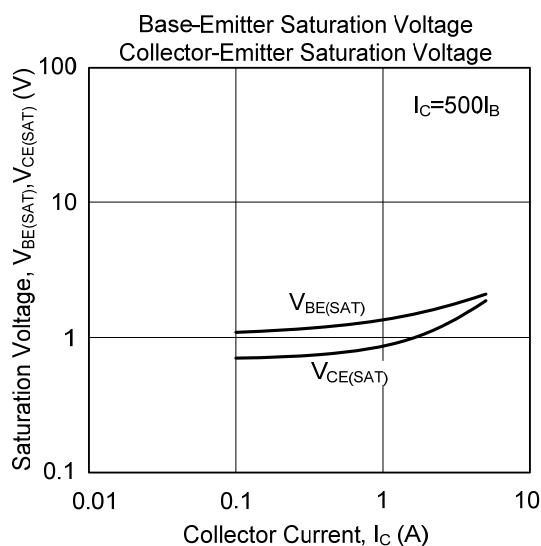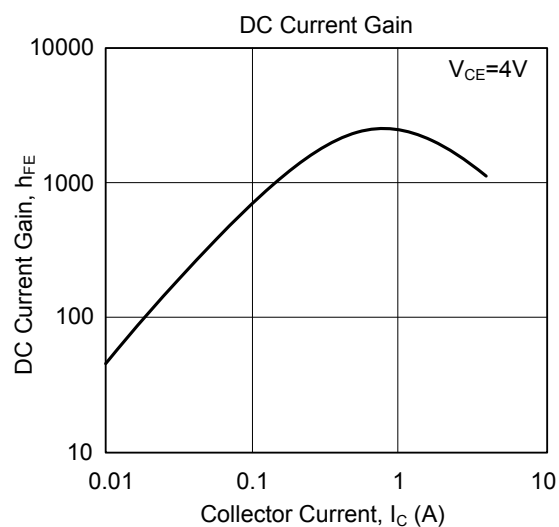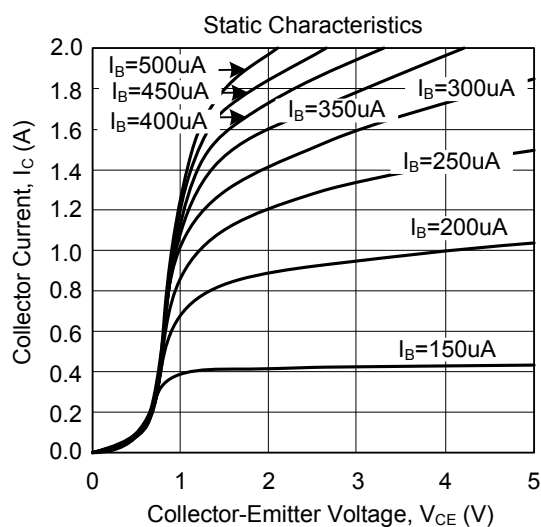

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

