

FEATURES

- * Ideal for surface mounted applications
- * Low switching noise
- * Low forward voltage drop
- * High current capability
- * High switching capability
- * High reliability
- * High surge capability
- * RoHS product for packing code suffix "G",
Halogen free product for packing code suffix "H".

MECHANICAL DATA



Case: Molded plastic, DO-214AB(SMC)

Epoxy: UL 94V-O rate flame retardant

Lead:MIL-STD-202E method 208C guaranteed

Mounting position: Any

Weight: Approximated 0.231 gram

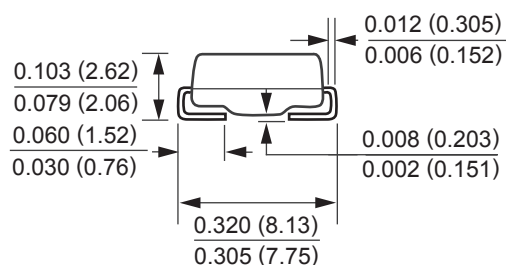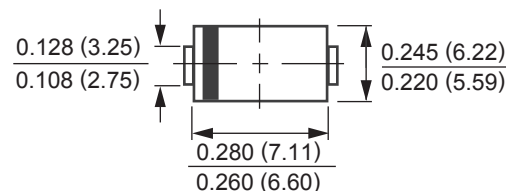

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

RATINGS	SYMBOL	SK32C	SK33C	SK34C	SK35C	SK36C	SK38C	SK310C	SK315C	SK320C	UNIT
Marking Code		SK32C	SK33C	SK34C	SK35C	SK36C	SK38C	SK310C	SK315C	SK320C	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current	I _O	3.0									Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	80.0									Amps
Typical Thermal Resistance (Note 2)	R _{θJC}	30									°C/W
Typical Junction Capacitance (Note 1)	C _J	180			150		110		100	80	pF
Operating Temperature Range	T _J	-55 to +125							-55 to +150		°C
Storage Temperature Range	T _{STG}	-55 to +150									°C

CHARACTERISTICS		SYMBOL	SK32C	SK33C	SK34C	SK35C	SK36C	SK38C	SK310C	SK315C	SK320C	UNIT	
Maximum Forward Voltage at 3.0A DC		V _F	0.55			0.70		0.85		0.87	0.90	Volts	
Maximum Average Reverse Current at	@T _c =25°C	I _R	0.5										mAmps
Rated DC Blocking Voltage	@T _c =100°C		20										

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Case.

RATING AND CHARACTERISTIC CURVES

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

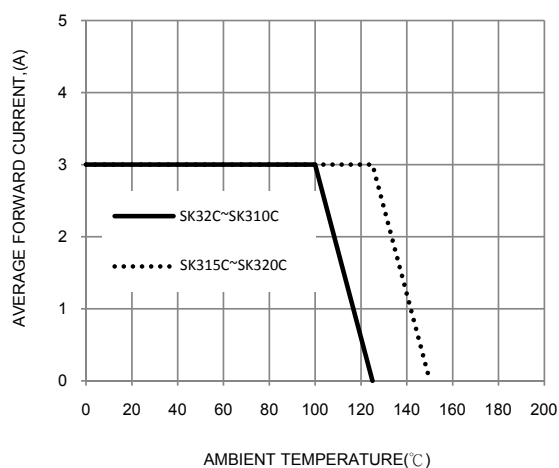


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

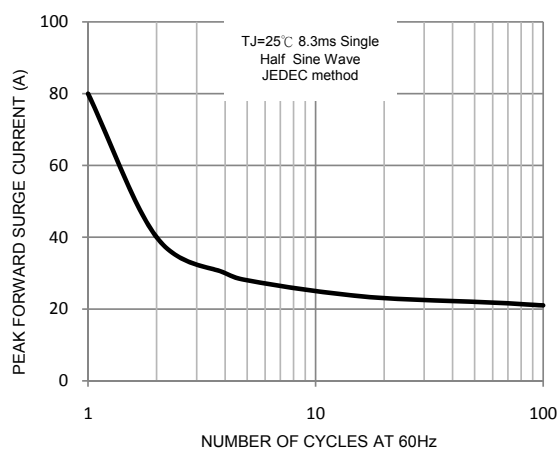


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

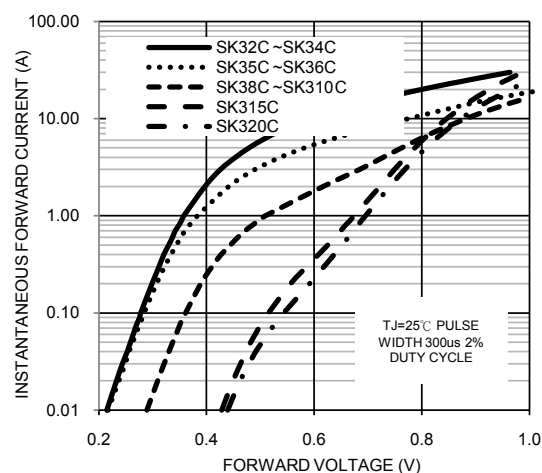


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

