


## DUAL 1-OF-4 DECODER/DEMULTIPLEXER High-Speed Silicon-Gate CMOS


The IN74ACT139 is identical in pinout to the LS/ALS139, HC/HCT139. The IN74ACT139 may be used as a level converter for interfacing TTL or NMOS outputs to High Speed CMOS inputs.

This device consists of two independent 1-of-4 decoders, each of which decodes a two-bit Address to one-of-four active-low outputs. Active-low Selects are provided to facilitate the demultiplexing and cascading functions. The demultiplexing function is accomplished by using the Address inputs to select the desired device output, and utilizing the Select as a data input.

- TTL/NMOS Compatible Input Levels
- Outputs Directly Interface to CMOS, NMOS, and TTL
- Operating Voltage Range: 4.5 to 5.5 V
- Low Input Current: 1.0  $\mu$ A; 0.1  $\mu$ A @ 25°C
- Outputs Source/Sink 24 mA



N SUFFIX  
PLASTIC



D SUFFIX  
SOIC


### ORDERING INFORMATION

IN74ACT139N Plastic

IN74ACT139D SOIC

$T_A = -40^\circ$  to  $85^\circ$  C for all packages

### LOGIC DIAGRAM

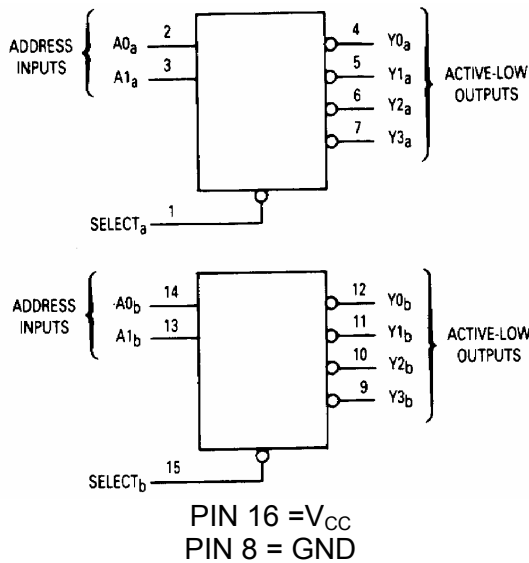

### PIN ASSIGNMENT

|                     |   |    |                     |
|---------------------|---|----|---------------------|
| SELECT <sub>a</sub> | 1 | 16 | $V_{CC}$            |
| A0 <sub>a</sub>     | 2 | 15 | SELECT <sub>b</sub> |
| A1 <sub>a</sub>     | 3 | 14 | A0 <sub>b</sub>     |
| Y0 <sub>a</sub>     | 4 | 13 | A1 <sub>b</sub>     |
| Y1 <sub>a</sub>     | 5 | 12 | Y0 <sub>b</sub>     |
| Y2 <sub>a</sub>     | 6 | 11 | Y1 <sub>b</sub>     |
| Y3 <sub>a</sub>     | 7 | 10 | Y2 <sub>b</sub>     |
| GND                 | 8 | 9  | Y3 <sub>b</sub>     |

### FUNCTION TABLE

| Inputs |    |    | Outputs |    |    |    |
|--------|----|----|---------|----|----|----|
| Select | A1 | A0 | Y0      | Y1 | Y2 | Y3 |
| H      | X  | X  | H       | H  | H  | H  |
| L      | L  | L  | L       | H  | H  | H  |
| L      | L  | H  | H       | L  | H  | H  |
| L      | H  | L  | H       | H  | L  | H  |
| L      | H  | H  | H       | H  | H  | L  |

X = don't care

# IN74ACT139

## MAXIMUM RATINGS\*

| Symbol    | Parameter                                                                           | Value                  | Unit |
|-----------|-------------------------------------------------------------------------------------|------------------------|------|
| $V_{CC}$  | DC Supply Voltage (Referenced to GND)                                               | -0.5 to +7.0           | V    |
| $V_{IN}$  | DC Input Voltage (Referenced to GND)                                                | -0.5 to $V_{CC} + 0.5$ | V    |
| $V_{OUT}$ | DC Output Voltage (Referenced to GND)                                               | -0.5 to $V_{CC} + 0.5$ | V    |
| $I_{IN}$  | DC Input Current, per Pin                                                           | $\pm 20$               | mA   |
| $I_{OUT}$ | DC Output Sink/Source Current, per Pin                                              | $\pm 50$               | mA   |
| $I_{CC}$  | DC Supply Current, $V_{CC}$ and GND Pins                                            | $\pm 50$               | mA   |
| $P_D$     | Power Dissipation in Still Air, Plastic DIP+<br>SOIC Package+                       | 750<br>500             | mW   |
| Tstg      | Storage Temperature                                                                 | -65 to +150            | °C   |
| $T_L$     | Lead Temperature, 1 mm from Case for 10<br>Seconds<br>(Plastic DIP or SOIC Package) | 260                    | °C   |

\*Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.

+Derating - Plastic DIP: - 10 mW/°C from 65° to 125°C

SOIC Package: - 7 mW/°C from 65° to 125°C

## RECOMMENDED OPERATING CONDITIONS

| Symbol            | Parameter                                                                               | Min    | Max       | Unit |
|-------------------|-----------------------------------------------------------------------------------------|--------|-----------|------|
| $V_{CC}$          | DC Supply Voltage (Referenced to GND)                                                   | 4.5    | 5.5       | V    |
| $V_{IN}, V_{OUT}$ | DC Input Voltage, Output Voltage (Referenced to GND)                                    | 0      | $V_{CC}$  | V    |
| $T_J$             | Junction Temperature (PDIP)                                                             |        | 140       | °C   |
| $T_A$             | Operating Temperature, All Package Types                                                | -40    | +85       | °C   |
| $I_{OH}$          | Output Current - High                                                                   |        | -24       | mA   |
| $I_{OL}$          | Output Current - Low                                                                    |        | 24        | mA   |
| $t_r, t_f$        | Input Rise and Fall Time * $V_{CC} = 4.5$ V<br>(except Schmitt Inputs) $V_{CC} = 5.5$ V | 0<br>0 | 10<br>8.0 | ns/V |

\*  $V_{IN}$  from 0.8 V to 2.0 V

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{IN}$  and  $V_{OUT}$  should be constrained to the range  $GND \leq (V_{IN} \text{ or } V_{OUT}) \leq V_{CC}$ .

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or  $V_{CC}$ ). Unused outputs must be left open.

## IN74ACT139

### DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

| Symbol            | Parameter                                      | Test Conditions                                                                                            | V <sub>CC</sub><br>V | Guaranteed Limits |               | Unit |
|-------------------|------------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------|-------------------|---------------|------|
|                   |                                                |                                                                                                            |                      | 25 °C             | -40°C to 85°C |      |
| V <sub>IH</sub>   | Minimum High-Level Input Voltage               | V <sub>OUT</sub> =0.1 V or V <sub>CC</sub> -0.1 V                                                          | 4.5<br>5.5           | 2.0<br>2.0        | 2.0<br>2.0    | V    |
| V <sub>IL</sub>   | Maximum Low-Level Input Voltage                | V <sub>OUT</sub> =0.1 V or V <sub>CC</sub> -0.1 V                                                          | 4.5<br>5.5           | 0.8<br>0.8        | 0.8<br>0.8    | V    |
| V <sub>OH</sub>   | Minimum High-Level Output Voltage              | I <sub>OUT</sub> ≤ -50 μA                                                                                  | 4.5<br>5.5           | 4.4<br>5.4        | 4.4<br>5.4    | V    |
|                   |                                                | *V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OH</sub> =-24 mA<br>I <sub>OH</sub> =-24 mA | 4.5<br>5.5           | 3.86<br>4.86      | 3.76<br>4.76  |      |
| V <sub>OL</sub>   | Maximum Low-Level Output Voltage               | I <sub>OUT</sub> ≤ 50 μA                                                                                   | 4.5<br>5.5           | 0.1<br>0.1        | 0.1<br>0.1    | V    |
|                   |                                                | *V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OL</sub> =24 mA<br>I <sub>OL</sub> =24 mA  | 4.5<br>5.5           | 0.36<br>0.36      | 0.44<br>0.44  |      |
| I <sub>IN</sub>   | Maximum Input Leakage Current                  | V <sub>IN</sub> =V <sub>CC</sub> or GND                                                                    | 5.5                  | ±0.1              | ±1.0          | μA   |
| ΔI <sub>CCT</sub> | Additional Max. I <sub>CC</sub> /Input         | V <sub>IN</sub> =V <sub>CC</sub> - 2.1 V                                                                   | 5.5                  |                   | 1.5           | mA   |
| I <sub>OLD</sub>  | +Minimum Dynamic Output Current                | V <sub>OLD</sub> =1.65 V Max                                                                               | 5.5                  |                   | 75            | mA   |
| I <sub>OHD</sub>  | +Minimum Dynamic Output Current                | V <sub>OHD</sub> =3.85 V Min                                                                               | 5.5                  |                   | -75           | mA   |
| I <sub>CC</sub>   | Maximum Quiescent Supply Current (per Package) | V <sub>IN</sub> =V <sub>CC</sub> or GND                                                                    | 5.5                  | 8.0               | 80            | μA   |

\* All outputs loaded; thresholds on input associated with output under test.

+Maximum test duration 2.0 ms, one output loaded at a time.

## IN74ACT139

### AC ELECTRICAL CHARACTERISTICS ( $V_{CC}=5.0\text{ V} \pm 10\%$ , $C_L=50\text{pF}$ , Input $t_r=t_f=3.0\text{ ns}$ )

| Symbol           | Parameter                                          | Guaranteed Limits |      |               |      | Unit |
|------------------|----------------------------------------------------|-------------------|------|---------------|------|------|
|                  |                                                    | 25 °C             |      | -40°C to 85°C |      |      |
|                  |                                                    | Min               | Max  | Min           | Max  |      |
| t <sub>PLH</sub> | Propagation Delay , Input A to Output Y (Figure 2) | 1.5               | 8.5  | 1.5           | 9.5  | ns   |
| t <sub>PHL</sub> | Propagation Delay , Input A to Output Y (Figure 2) | 1.5               | 9.5  | 1.5           | 10.5 | ns   |
| t <sub>PLH</sub> | Propagation Delay, Select to Output Y (Figure 1)   | 2.5               | 10.0 | 2.0           | 11.0 | ns   |
| t <sub>PHL</sub> | Propagation Delay, Select to Output Y (Figure 1)   | 2.0               | 9.5  | 1.5           | 10.5 | ns   |
| C <sub>IN</sub>  | Maximum Input Capacitance                          | 4.5               |      | 4.5           |      | pF   |

| C <sub>PD</sub> | Power Dissipation Capacitance | Typical @25°C,V <sub>CC</sub> =5.0 V | pF |
|-----------------|-------------------------------|--------------------------------------|----|
|                 |                               | 40                                   |    |

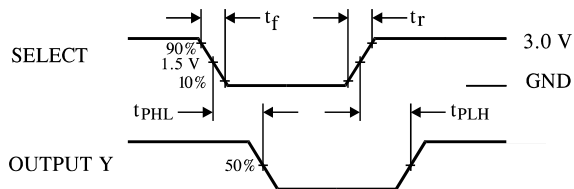


Figure 1. Switching Waveform

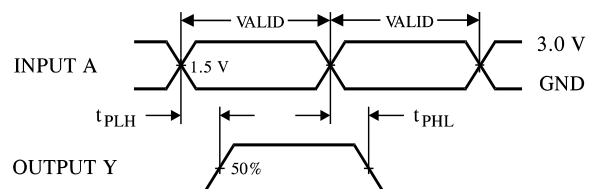


Figure 2. Switching Waveform

**EXPANDED LOGIC DIAGRAM**