


REV.	DESCRIPTION	DATE	APPROVED
#1	RELEASED FOR DEVELOPMENT	DPK 11/19/97	SWN
#2	ADDED ±.010 TOL TO DIM	DPK 12/8/97	SWN
#3	.49 WAS .490: REMOVE P/N STAMPING	DPK 8/24/98	SWN
#4	2.22 WAS 2.220: .40 WAS .400: ADDED 'O' TO .190 & .100	DPK 9/11/98	SWN
#5	ADDED NOTE 4, CRITICAL CHA.'O'	AK 10/5/99	SWN

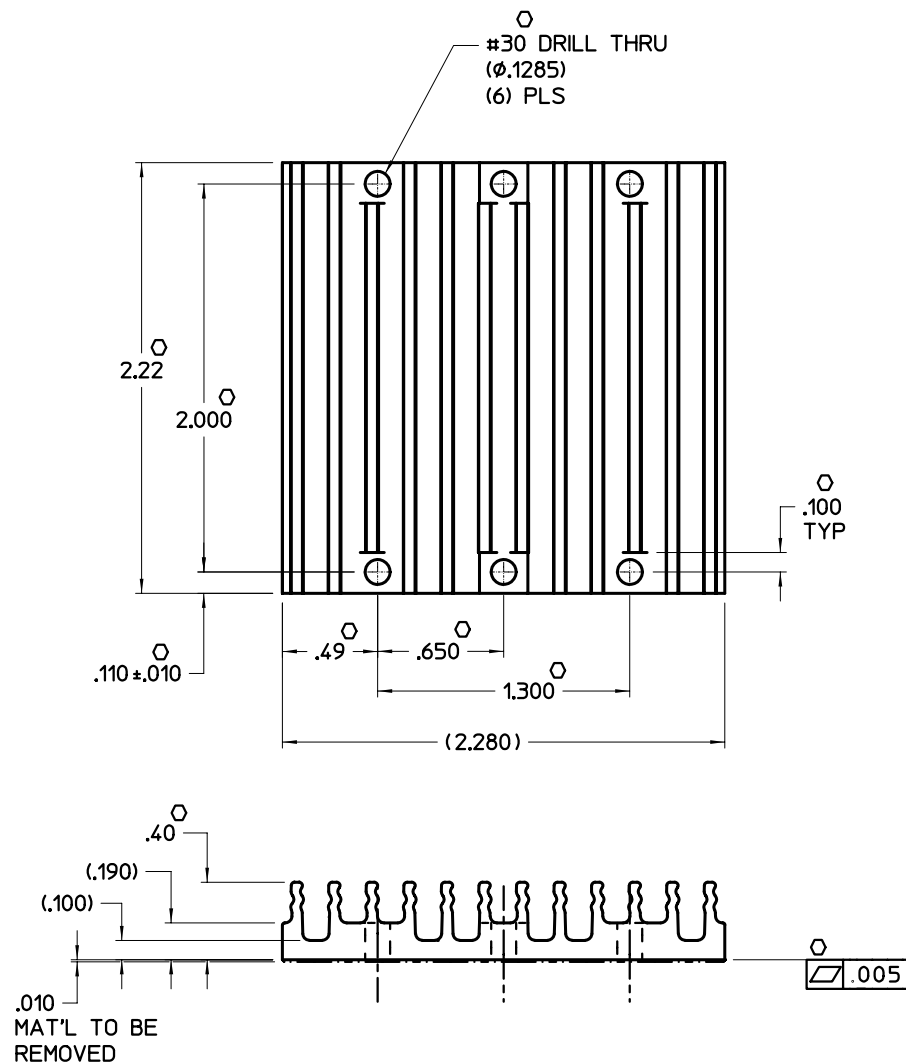

NOTES

1. MAKE FROM VICOR EXTRUSION P/N 16296.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINISH. CLEAR CHROMATE.
4. 'O' DENOTES CRITICAL CHARACTERISTICS FOR LOT INSPECTION.

DRAWN BY D.P. KELLY	DATE 11/97	VICOR	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES 1/64 ±.01 30° ±.005 90°		HTSNK, "B" X-FLOW, .4H LOW FLOW, THRU HOLE	
THIRD ANGLE PROJECTION	SIZE C	FSCH NO. 67131	DWG NO. 18073
DO NOT SCALE DRAWING	SCALE 2-1	SHEET 1	OF 1