


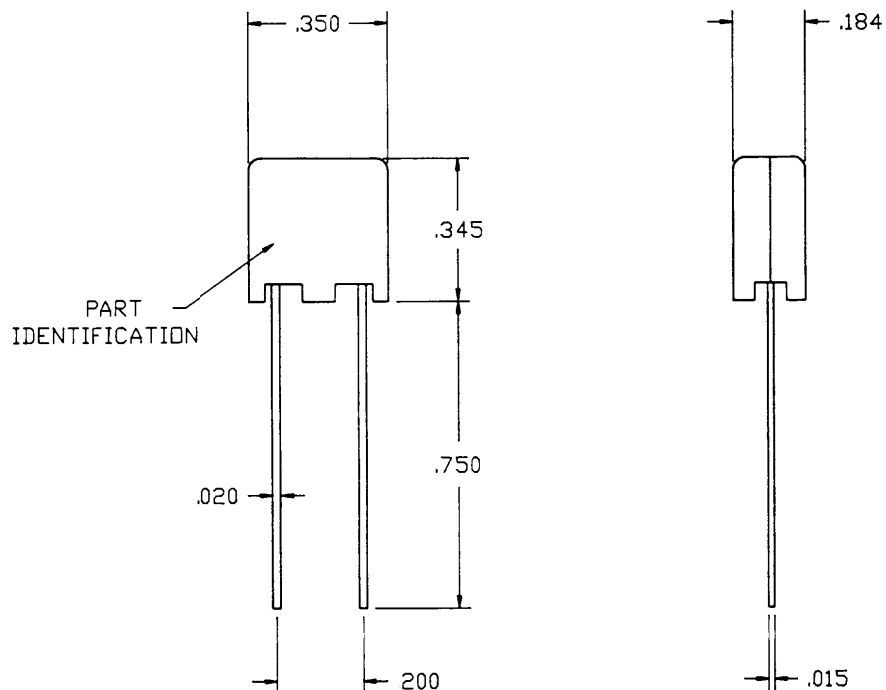

LTR.	DESCRIPTION	DATE	APP'D.
1	PRELIMINARY RELEASE PCD# 044 S.P.V.	2/18/88	10/24

SPECIFICATIONS:

INTERUPTING AND VOLTAGE RATINGS:

10,000 A @ 125V_{ac}

TIME-CURRENT CHARACTERISTICS:

CARRY 100% OF RATING FOR FOUR HOURS MINIMUM. OPEN AT 200% OF RATING IN TEN SECONDS MAXIMUM. (NON-TIME-DELAY).

AGENCY APPROVALS:

U.L. RECOGNIZED; FILE E19180

CSA CERTIFIED; FILE 42731, CLASS 1421-01

COLD RESISTANCE DATA (10% RATED CURRENT)

NOMINAL VALUE:

0.026 Ω

COPY

NOTES:

1. BUSS #PCD5-125 OR APPROVED EQUIVALENT.

VICOR ANDOVER, MA. U.S.A.

DRAWN: 2/88	FUSE, 5AMP, 125V, PCD5	
CHECKED: 15/88		
APP'D: 1		
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING	TOLERANCES (EXCEPT AS NOTED) .XX $\pm$.01 .XXX $\pm$.006 FRACT. $\pm$ 1/64 ANGLES $\pm$ 1°	DRAWING NO.
	SCALE: NONE	REV.
HEET ASST:	SHEET 1 OF 1	1