
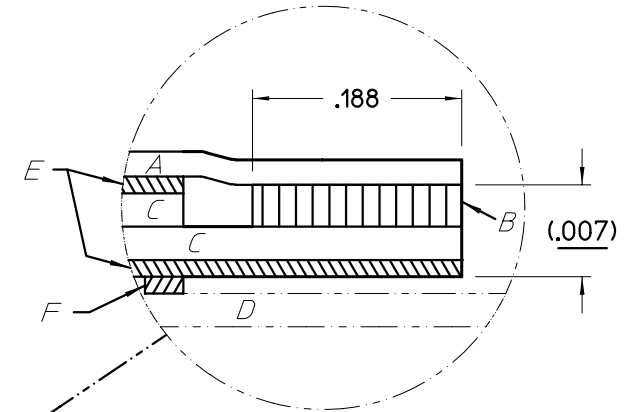


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
#5	MODIFY TO LOOK LIKE VENDOR'S DWG RCM	8/14/98	KGD
#6	ADDED ARTWORK AK	2/1/99	KGD
#7	ADDED NOTE 5 PEI	7/20/99	JMR


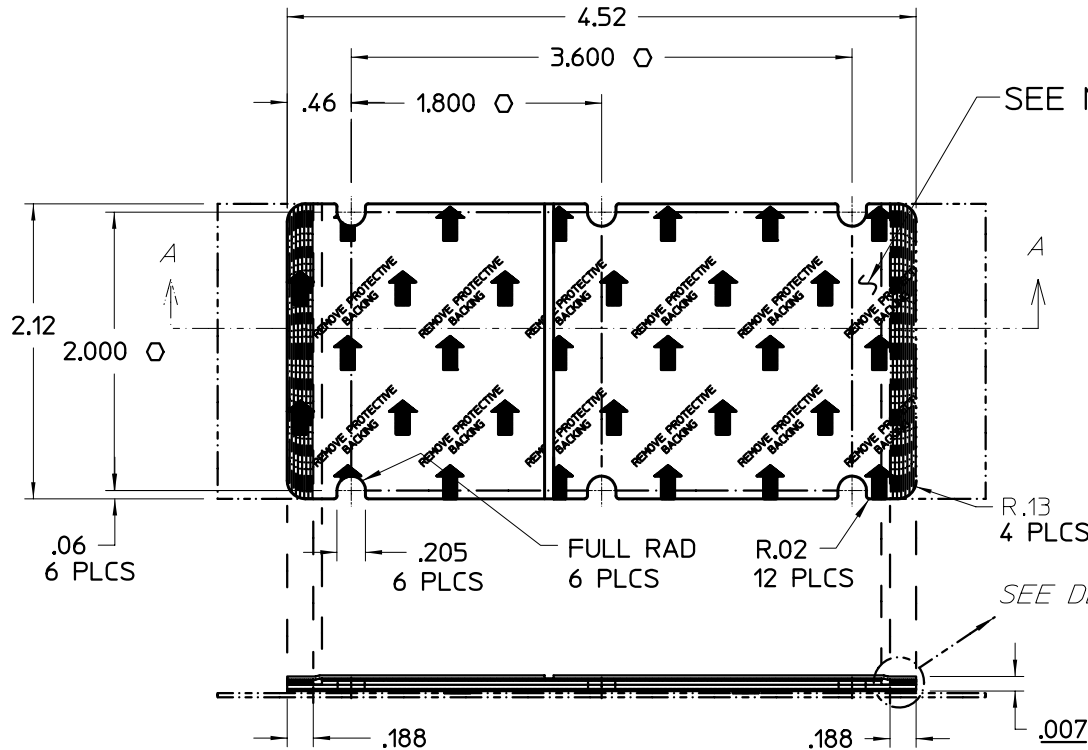


DETAIL :

- A. SPLIT RELEASE LINER.
- B. ADHESIVE STRIP; .0025 THICK .188 WIDE.
- C. ALUMINUM ALLOY 1145-0; .002 THICK.
- D. ROLL CARRIER WITH ADHESIVE STRIP BONDING.
- E. PHASE CHANGE THERMAL COMPOUND.
- F. ADHESIVE STRIPS ON ROLL CARRIER.

NOTES:

- 1. MATERIAL: MAKE FROM POWER DEVICES AL-2-45H-212
- 2. THICKNESS: .007±.001.
- 3. SEE DETAIL FOR ASSY ORDER.
- 4. FOR ARTWORK SHOWN HERE SEE DWG# 20200.
- 5. O DENOTE CRITICAL CHARACTERISTIC FOR LOT INSPECTION.

DRAWN BY		DATE					
J. RENAUD		2/13/97					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES 1/64 .XX=.01 1° XXX=.005				THERMAL INTERFACE PAD, ThermMate® (MAXI)			
THIRD ANGLE PROJECTION 							
DO NOT SCALE DRAWING				SIZE	FSCM NO.	DWG NO.	REV
				B	67131	16188	#7
				SCALE	FULL	SHEET 1	OF 1