

High Current Common Mode Choke



FEATURES

- SMD high current common mode choke for DC power line
- Base terminals are treated, allows for easy mounting on PCB
- Paired wire coil for high stability
- Optimized for transmission of high quality signals
- Operating Temperature: - 25 °C to + 85 °C
- Rated Current: Based on temp. rise; ΔT : 40 °C, typical
- Compliant to RoHS Directive 2002/95/EC


RoHS
COMPLIANT

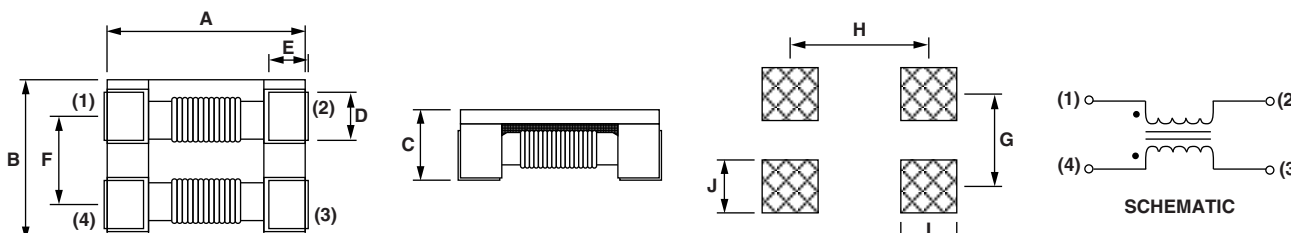
APPLICATIONS

- LAN's, telephones, personal computers
- CD-ROM drives, electronic games
- Other electronic devices

STANDARD ELECTRICAL SPECIFICATIONS

PART NUMBER	COMMON MODE IMPEDANCE AT 100 MHz $\pm$ 25 % (Ω)	RATED VOLTAGE MAX. (V _{DC})	RATED CURRENT MAX. (mA)	DC RESISTANCE MAX. (Ω)	INSULATION RESISTANCE MIN. (M Ω)
ICM2824ER301V	300	80	5000	0.01	10
ICM2824ER701V	700	80	4000	0.015	10
ICM3528ER701V	700	80	5000	0.01	10
ICM3528ER152V	1500	80	4500	0.015	10
ICM4743ER701V	700	80	8000	0.006	10
ICM4743ER102V	1000	80	6000	0.014	10

DIMENSIONS in inches [millimeters]

										
LAND PATTERN										
PART NUMBER	A	B	C	D	E	F	G	H	I	J
ICM-2824	0.276 $\pm$ 0.012 [7.0 $\pm$ 0.3]	0.236 $\pm$ 0.008 [6.0 $\pm$ 0.2]	0.157 [4.0] max.	0.063 $\pm$ 0.012 [1.6 $\pm$ 0.3]	0.071 $\pm$ 0.012 [1.8 $\pm$ 0.3]	0.118 [3.0] typ.	0.118 [3.0] ref.	0.256 [6.5] ref.	0.098 [2.5] ref.	0.063 [1.6] ref.
ICM-3528	0.354 $\pm$ 0.020 [9.0 $\pm$ 0.5]	0.276 $\pm$ 0.012 [7.0 $\pm$ 0.3]	0.197 [5.0] max.	0.060 $\pm$ 0.008 [1.5 $\pm$ 0.2]	0.060 $\pm$ 0.008 [1.5 $\pm$ 0.2]	0.138 [3.5] typ.	0.138 [3.5] ref.	0.335 [8.5] ref.	0.098 [2.5] ref.	0.071 [1.8] ref.
ICM-4743	0.472 $\pm$ 0.20 [12.0 $\pm$ 0.5]	0.433 $\pm$ 0.012 [11.0 $\pm$ 0.3]	0.248 [6.3] max.	0.106 $\pm$ 0.008 [2.7 $\pm$ 0.2]	0.091 $\pm$ 0.008 [2.3 $\pm$ 0.2]	0.205 [5.2] typ.	0.205 [5.2] ref.	0.374 [9.5] ref.	0.177 [4.5] ref.	0.106 [2.7] ref.

PART NUMBER	A	B	C	D	E	F	G	H	I	J
ICM-2824	0.276 $\pm$ 0.012 [7.0 $\pm$ 0.3]	0.236 $\pm$ 0.008 [6.0 $\pm$ 0.2]	0.157 [4.0] max.	0.063 $\pm$ 0.012 [1.6 $\pm$ 0.3]	0.071 $\pm$ 0.012 [1.8 $\pm$ 0.3]	0.118 [3.0] typ.	0.118 [3.0] ref.	0.256 [6.5] ref.	0.098 [2.5] ref.	0.063 [1.6] ref.
ICM-3528	0.354 $\pm$ 0.020 [9.0 $\pm$ 0.5]	0.276 $\pm$ 0.012 [7.0 $\pm$ 0.3]	0.197 [5.0] max.	0.060 $\pm$ 0.008 [1.5 $\pm$ 0.2]	0.060 $\pm$ 0.008 [1.5 $\pm$ 0.2]	0.138 [3.5] typ.	0.138 [3.5] ref.	0.335 [8.5] ref.	0.098 [2.5] ref.	0.071 [1.8] ref.
ICM-4743	0.472 $\pm$ 0.20 [12.0 $\pm$ 0.5]	0.433 $\pm$ 0.012 [11.0 $\pm$ 0.3]	0.248 [6.3] max.	0.106 $\pm$ 0.008 [2.7 $\pm$ 0.2]	0.091 $\pm$ 0.008 [2.3 $\pm$ 0.2]	0.205 [5.2] typ.	0.205 [5.2] ref.	0.374 [9.5] ref.	0.177 [4.5] ref.	0.106 [2.7] ref.

DESCRIPTION

ICM-3528	700	25 %	ER	e3
MODEL	IMPEDANCE VALUE	TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

I	C	M	3	5	2	8	E	R	7	0	1	V
MODEL			SIZE				PACKAGE CODE		IMPEDANCE			TOL.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.