



1. Mechanical Dimensions:

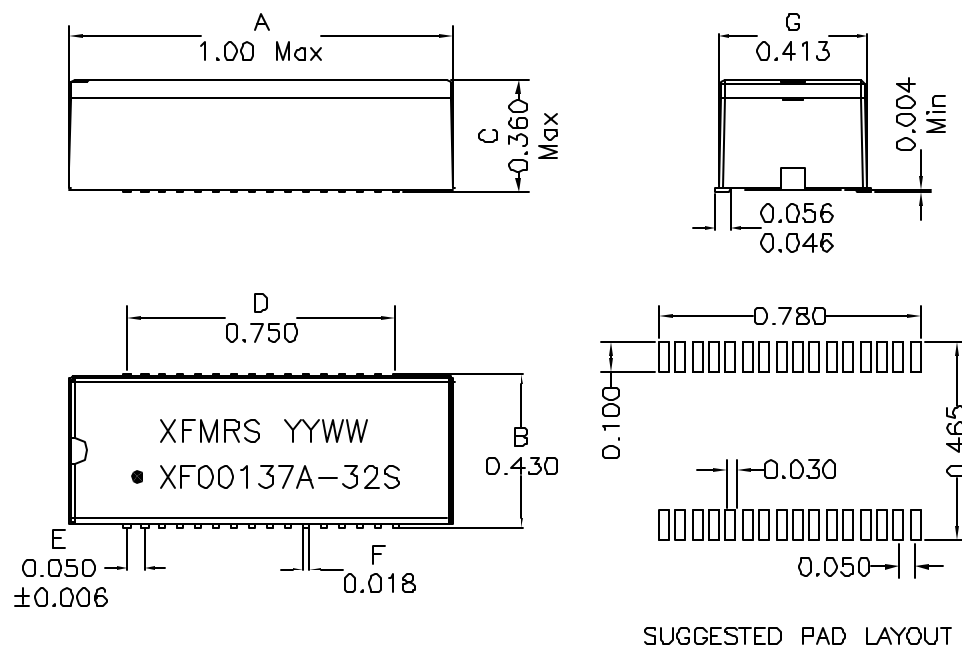

2. Schematic:

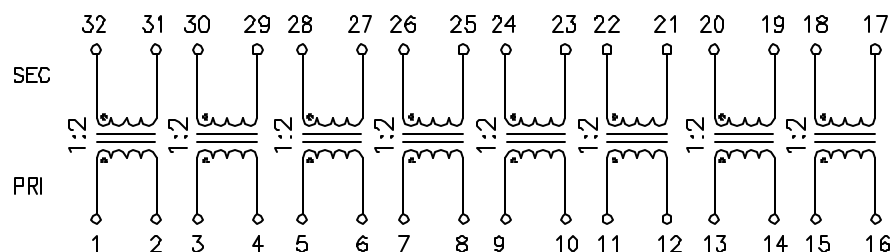

3. Electrical Specifications: @25°C

ISOLATION: 1500Vrms (PRI to SEC)

URNS RATIO: (PRI:SEC)=1:2±2%

SEC OCL: 1.20mH Min @10KHz 50mV

SEC Q: 8 Min @10KHz 50mV

Cw/w: 30pF Max @10KHz 50mV (PRI/SEC)

SEC LL: 0.6uH Max @100KHz 50mV, Short PRI

CROSSTALK: -60dB Typ

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004" (0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. Includes bottom lid.

DOC. REV: B/2

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com	Title: T1/E1/CEPT QUAD PORT	
	P/N: XF00137A-32S	REV. B
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	DWN. Feng Feb-06-12 CHK. YK Liao Feb-06-12
	SHEET 1 OF 1	APP. Joe Huff Feb-06-12