


Schottky PowerMod

FST10030 – FST10045

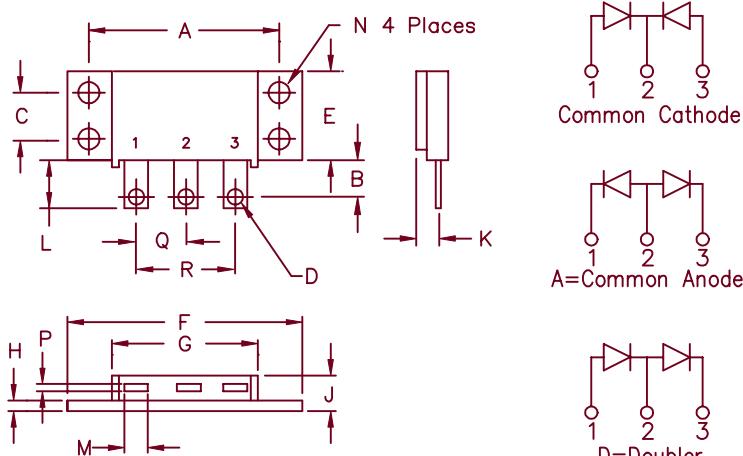

Dim. Inches		Millimeters		
Min.	Max.	Min.	Max.	Notes
A 1.995	2.005	50.67	50.93	
B 0.300	0.325	7.62	8.26	
C 0.495	0.505	12.57	12.83	
D 0.182	0.192	4.62	4.88	Dia.
E 0.990	1.010	25.15	25.65	
F 2.390	2.410	60.71	61.21	
G 1.500	1.525	38.10	38.70	
H 0.120	0.130	3.05	3.30	
J ---	0.400	---	10.16	
K 0.240	0.260	6.10	6.60 to Lead CL	
L 0.490	0.510	12.45	12.95	
M 0.330	0.350	8.38	6.90	
N 0.175	0.195	4.45	4.95	Dia.
P 0.035	0.045	0.89	1.14	
Q 0.445	0.455	11.30	11.56	
R 0.890	0.910	22.61	23.11	

T0-249

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST10030*	30V	30V	30V
FST10035*	35V	35V	35V
FST10040*	40V	40V	40V
FST10045*	45V	45V	45V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- Low forward voltage
- V_{RRM} 30 to 45 Volts
- Electrically isolated base
- Reverse Energy Tested
- Center tap

Electrical Characteristics

Average forward current per pkg	$I_{F(AV)}$ 100 Amps	$T_C = 85^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$
Average forward current per leg	$I_{F(AV)}$ 50 Amps	$T_C = 85^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$
Maximum surge current per leg	I_{FSM} 1000 Amps	8.3 ms, half sine $T_J = 175^\circ\text{C}$
Max repetitive peak reverse current per leg	$I_{R(OV)}$ 2 Amps	$f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec}$ Square wave
Max peak forward voltage per leg	V_{FM} .48 Volts	$I_{FM} = 50A: T_J = 125^\circ\text{C}^*$
Max peak forward voltage per leg	V_{FM} .53 Volts	$I_{FM} = 50A: T_J = 25^\circ\text{C}^*$
Max peak reverse current per leg	I_{RM} 600 mA	$V_{RRM}, T_J = 125^\circ\text{C}^*$
Max peak reverse current per leg	I_{RM} 2 mA	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical junction capacitance per leg	C_J 2700 pF	$V_R = 5.0V, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 125°C
Max thermal resistance per leg	$R_{\theta JC}$	$1.0^\circ\text{C}/\text{W}$ Junction to case
Max thermal resistance per pkg.	$R_{\theta JC}$	$0.5^\circ\text{C}/\text{W}$ Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	$0.1^\circ\text{C}/\text{W}$ Case to sink
Mounting torque		15–20 inch pounds
Weight		2.5 ounces (71 grams) typical

FST10030 – FST10045

Figure 1
Typical Forward Characteristics – Per Leg

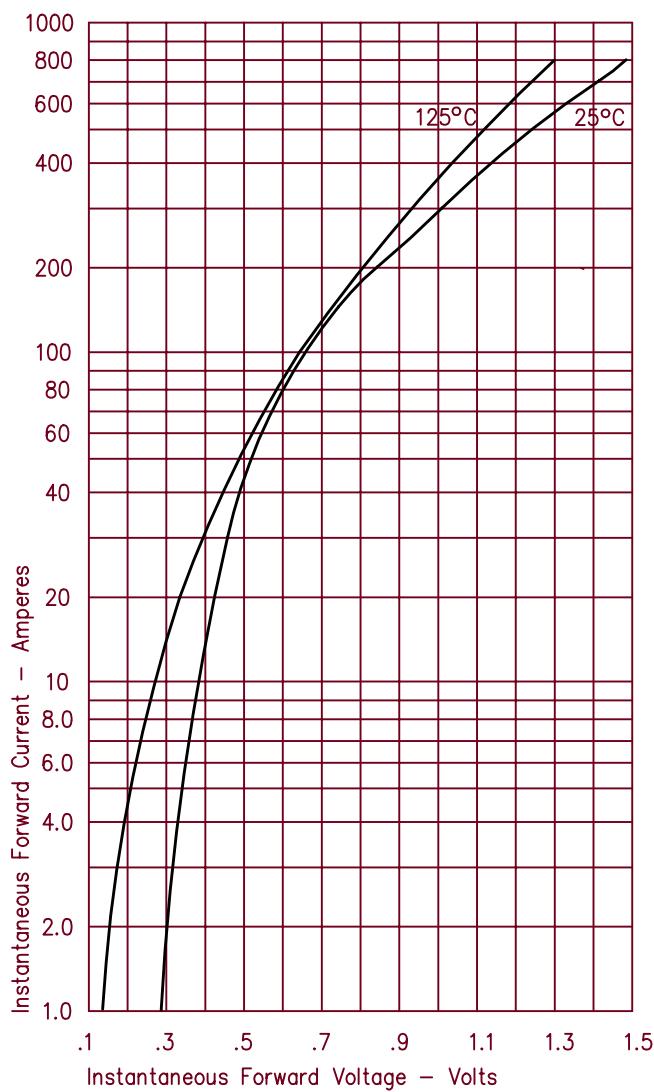


Figure 2
Typical Reverse Characteristics – Per Leg

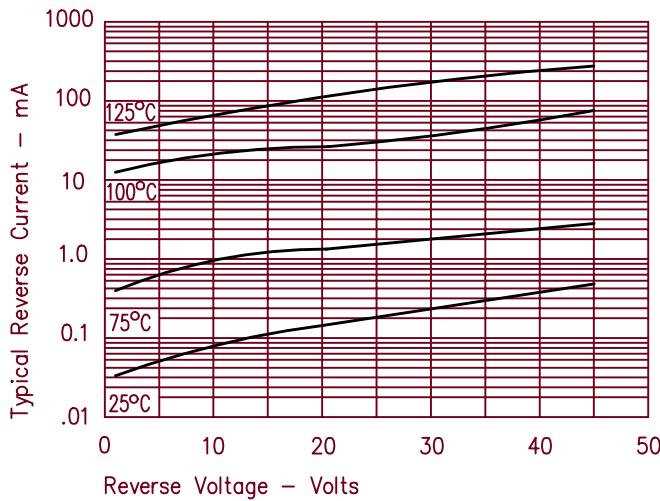


Figure 3
Typical Junction Capacitance – Per Leg

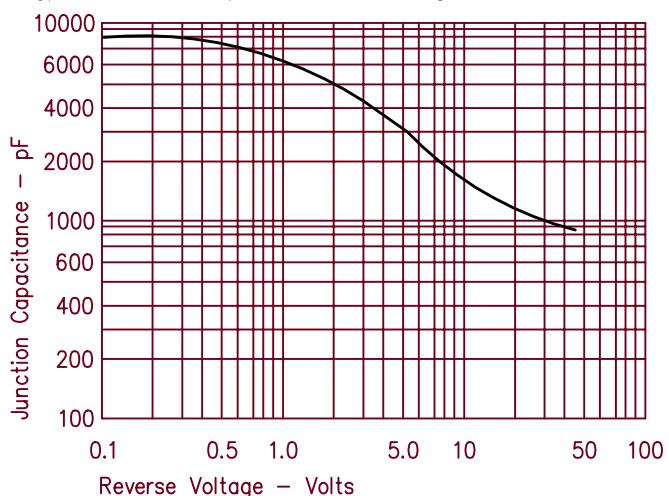


Figure 4
Forward Current Derating – Per Leg

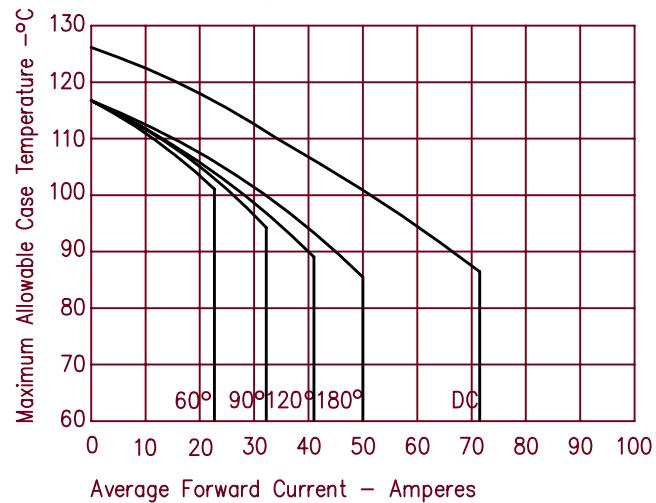


Figure 5
Maximum Forward Power Dissipation – Per Leg

