

**6N70**

Preliminary

Power MOSFET**6.0A, 700V N-CHANNEL
POWER MOSFET**

■ DESCRIPTION



The UTC **6N70** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with a minimum on-state resistance, high switching speed, low gate charge and low input capacitance.

The UTC **6N70** is universally applied in high efficiency switch mode power supply.

■ FEATURES

- * $R_{DS(ON)}=1.6\Omega$ @ $V_{GS}=10V$, $I_D=3A$
- * Low gate charge (Typically 51nC)
- * Low C_{RSS} (Typically 45pF)
- * High switching speed

■ SYMBOL

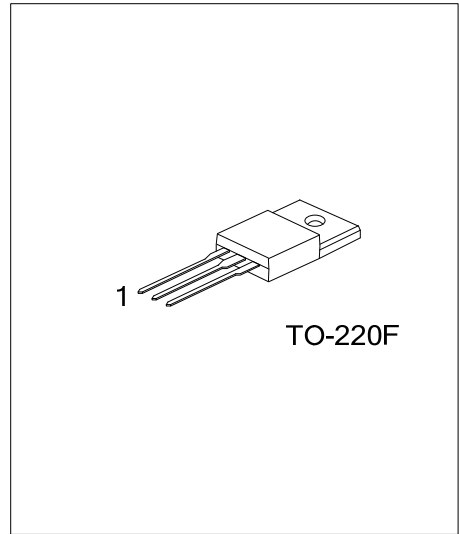

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
6N70L-TF3-T	6N70G-TF3-T	TO-220F	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

6N70L-TF3-T (1)Packing Type (2)Package Type (3)Lead Free		(1) T: Tube (2) TF3: TO-220F (3) G: Halogen Free, L: Lead Free
---	--	--

■ ABSOLUTE MAXIMUM RATINGS (unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT
Drain-Source Voltage			V _{DSS}	700	V
Gate-Source Voltage (Note 2)			V _{GSS}	±30	V
Drain Current	Continuous	T _C =25°C	I _D	6	A
		T _C =100°C		3.8	A
	Pulsed		I _{DM}	24	A
Avalanche Current (Note 2)			I _{AR}	6	A
Avalanche Energy	Single Pulsed (Note 3)		E _{AS}	582	mJ
	Repetitive (Note 2)		E _{AR}	13	mJ
Peak Diode Recovery dv/dt (Note 4)			dv/dt	2.5	V/ns
Power Dissipation			P _D	130	W
Linear Derating Factor				1.04	W/°C
Junction Temperature			T _J	+150	°C
Storage Temperature			T _{STG}	-55~+150	°C

- Notes:
1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
 2. Repetitive Rating: Pulse width limited by maximum junction temperature
 3. $L = 30\text{mH}$, $I_{AS} = 6\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 27\Omega$, Starting $T_J = 25^{\circ}\text{C}$
 4. $I_{SD} \leq 6\text{A}$, $di/dt \leq 140\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^{\circ}\text{C}$

■ THERMAL DATA


PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	62.5	$^{\circ}\text{C}/\text{W}$
Junction to Case	θ_{JC}	0.96	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise specified)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =0V	700			V
Breakdown Voltage Temperature Coefficient		ΔBV _{DSS} /ΔT _J	I _D =250μA		0.79		V/°C
Drain-Source Leakage Current		I _{DSS}	V _{DS} =700V			25	μA
			V _{DS} =560V, T _C =125°C			250	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+30V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-30V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA, V _{DS} =5V	2.0		4.0	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =3A (Note 1)		1.6	1.8	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1.0MHz (Note 1, 2)		920	1200	pF
Output Capacitance		C _{OSS}			100	115	pF
Reverse Transfer Capacitance		C _{RSS}			45	55	pF
SWITCHING PARAMETERS							
Total Gate Charge		Q _G	V _{GS} =10V, V _{DS} =560V, I _D =6A (Note 1, 2)		51	67	nC
Gate to Source Charge		Q _{GS}			8.3		nC
Gate to Drain Charge		Q _{GD}			23.1		nC
Turn-ON Delay Time		t _{D(ON)}	V _{DD} =350V, I _D =6A, R _G =11.5Ω		18	45	ns
Rise Time		t _R			23	55	ns
Turn-OFF Delay Time		t _{D(OFF)}			76	160	ns
Fall-Time		t _F			26	60	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S	Integral reverse pn-diode in the MOSFET			6	A
Maximum Body-Diode Pulsed Current (Note 3)		I _{SM}				24	A
Drain-Source Diode Forward Voltage (Note 2)		V _{SD}	I _S =6A, V _{GS} =0V, T _J = 25°C			1.4	V
Body Diode Reverse Recovery Time		t _{rr}	I _F =6A, dI _F /dt=100A/μs, T _J = 25°C		440		ns
Body Diode Reverse Recovery Charge		Q _{RR}			4.05		μC

- Notes: 1. Pulse Test: Pulse width $\leq 250\mu\text{s}$, Duty cycle $\leq 2\%$
2. Essentially independent of operating temperature
3. Repetitive Rating: Pulse width limited by maximum junction temperature


■ TEST CIRCUITS AND WAVEFORMS

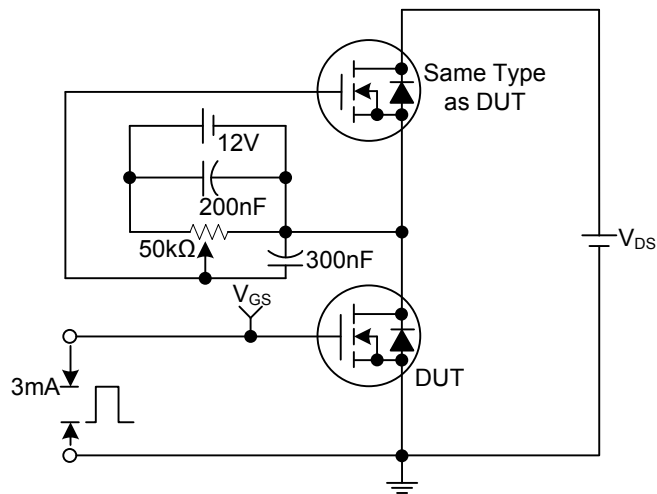


Gate Charge Test Circuit

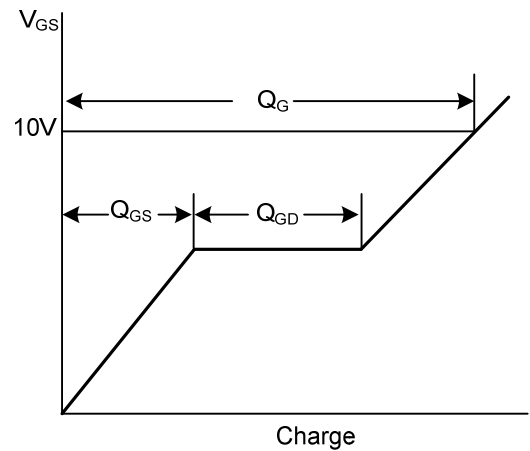


Gate Charge Waveforms

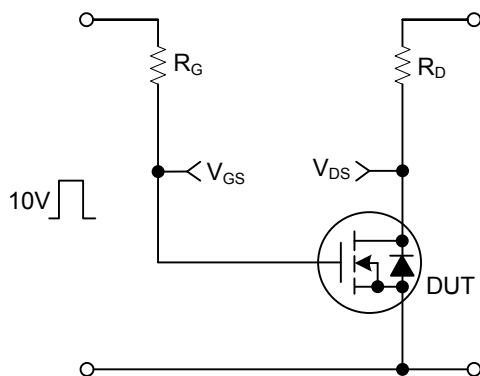


Resistive Switching Test Circuit

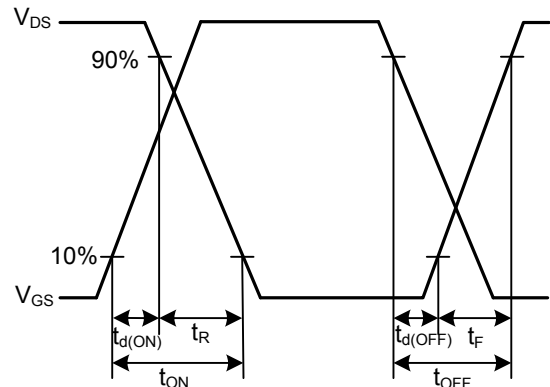

Resistive Switching Waveforms




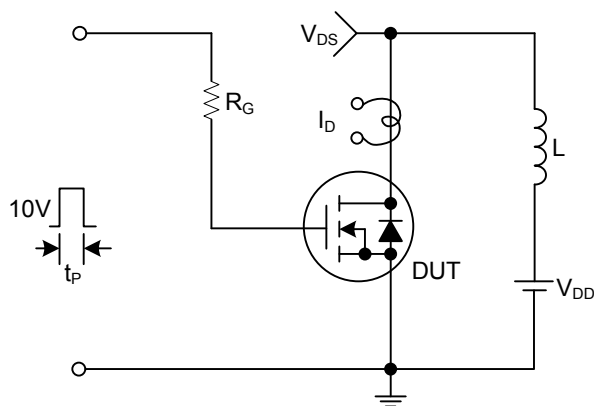


Unclamped Inductive Switching Test Circuit

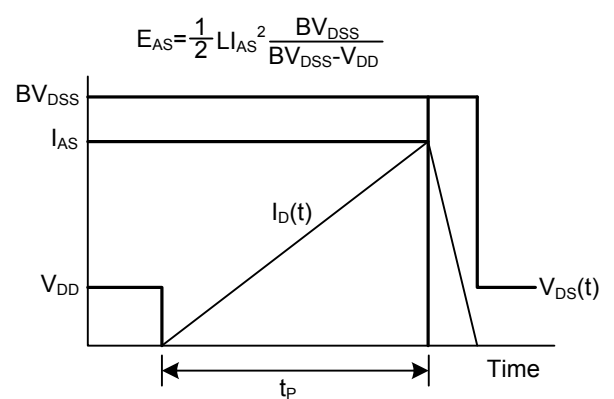

Unclamped Inductive Switching Waveforms

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

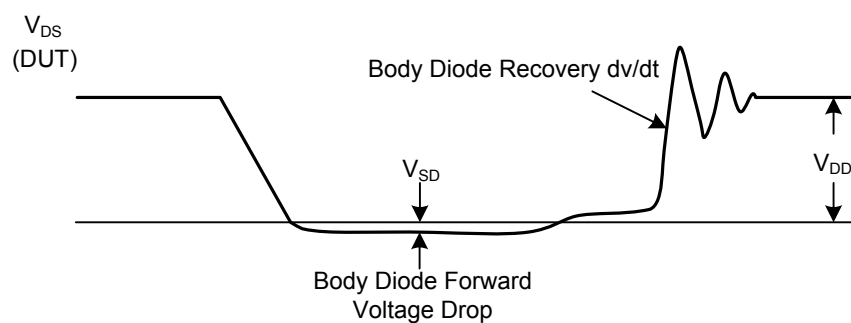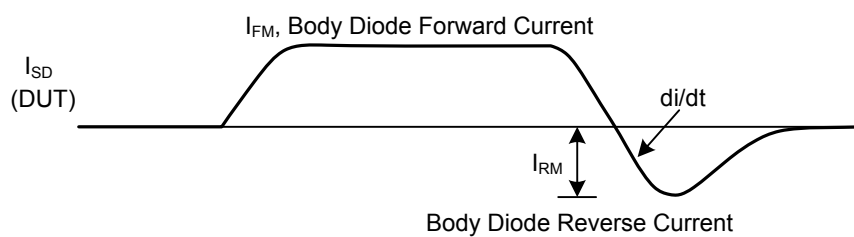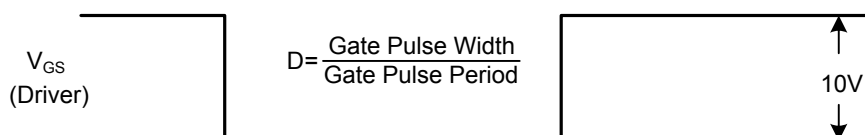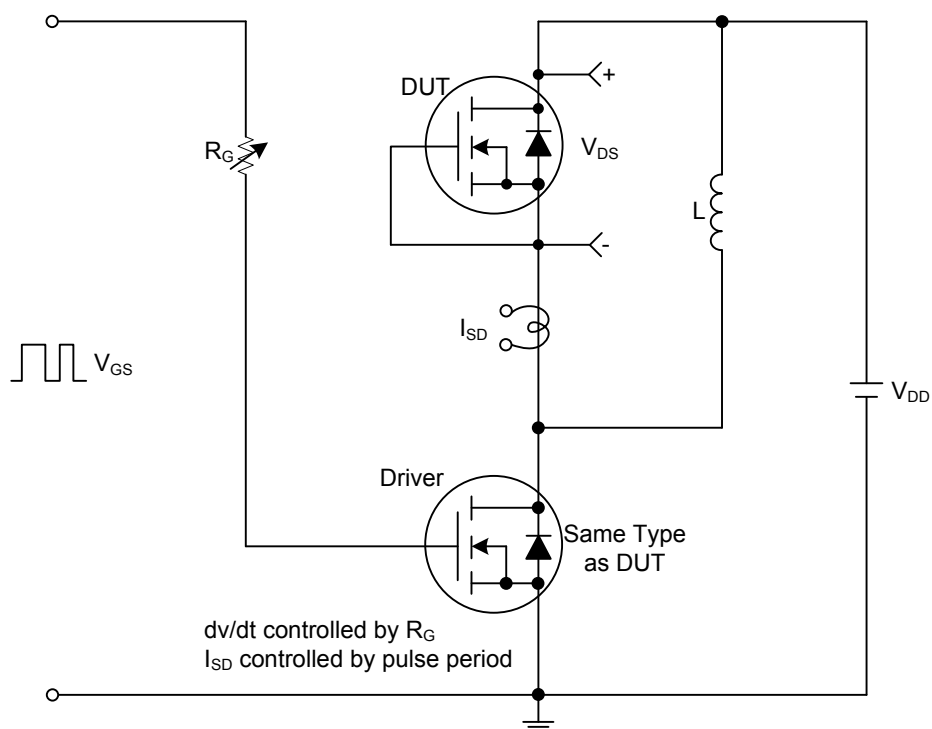

Peak Diode Recovery dv/dt Test Circuit and Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.