


FEPF6AT THRU FEPF6DT

FAST EFFICIENT PLASTIC RECTIFIER

Reverse Voltage - 50 to 200 Volts

Forward Current - 6.0 Amperes


ITO-220AB

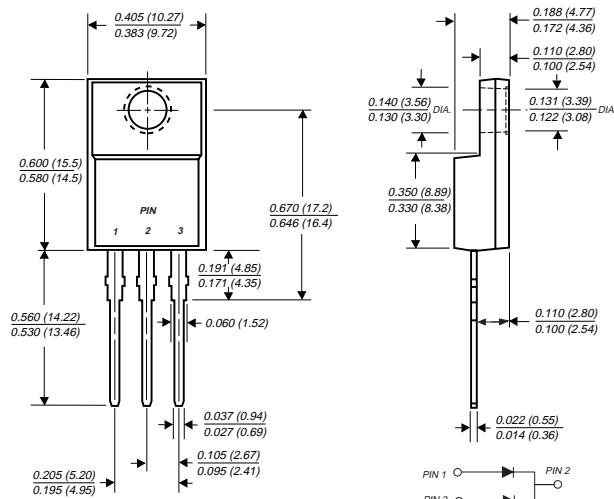

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Dual rectifier construction, positive center-tap
- ◆ Glass passivated chip junctions
- ◆ Superfast recovery times for high efficiency
- ◆ Low power loss
- ◆ Low forward voltage, high current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling and polarity protection applications
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds



MECHANICAL DATA

Case: JEDEC ITO-220AB molded plastic body over passivated chips

Terminals: Plated lead solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Weight: 0.08 ounce, 2.24 grams

Mounting Torque: 5 in. - lb. max.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	FEPF6AT	FEPF6BT	FEPF6CT	FEPF6DT	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	Volts
Maximum RMS voltage	V _{RMS}	35	70	105	140	Volts
Maximum DC blocking voltage	V _{DC}	50	100	150	200	Volts
Maximum average forward rectified current T _C =100°C	I _(AV)			6.0		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}			100.0		Amps
Maximum instantaneous forward voltage per leg at 3.0A	V _F		0.975			Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage	I _R		5.0	50.0		μA
Maximum reverse recovery time per leg (NOTE 1)	t _{rr}		35.0			ns
Typical thermal resistance (NOTE 2)	R _{θJC}		5.4			°C/W
Typical junction capacitance per leg (NOTE 3)	C _J		28.0			pF
Operating junction and storage temperature range	T _J , T _{STG}		-55 to +150			°C

NOTES:

(1) Reverse recovery test conditions: I_F=0.5A, I_r=1.0A, I_{rr}=0.25A

(2) Thermal resistance from junction to case per leg mounted on heatsink

(3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

RATINGS AND CHARACTERISTICS CURVES FEPF6AT THRU FEPF6DT

