



IMT2A

PNP EPITAXIAL SILICON TRANSISTOR

GENERAL PURPOSE DUAL TRANSISTOR



DESCRIPTION

The UTC **IMT2A** is a general purpose dual transistor within two chips in a SMT package.

FEATURES

* Two Chips in a SMT Package

EQUIVALENT CIRCUITS

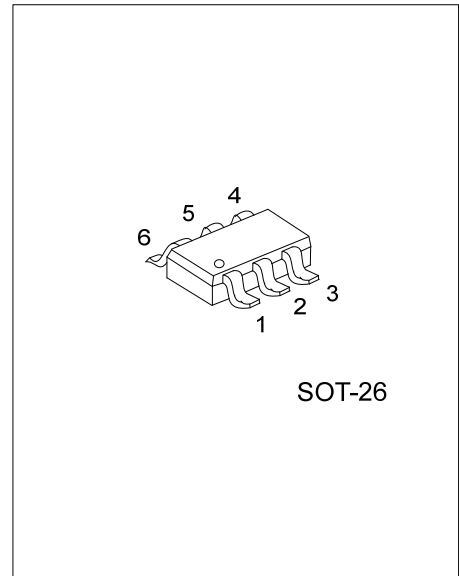


SOT-26

ORDERING INFORMATION

Order Number		Package	Pin Description						Packing
Lead Free	Halogen Free		1	2	3	4	5	6	
IMT2AL-AG6-R	IMT2AG-AG6-R	SOT-26	C2	B1	C1	E1	E2	B2	Tape Reel

IMT2AL-AG6-T (1) Packing Type (2) Package Type (3) Lead Free	(1) R: Tape Reel (2) AG6: SOT-26 (3) G: Halogen Free, L: Lead Free
--	---

MARKING



■ ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter voltage	V_{CEO}	-50	
Emitter to Base Voltage	V_{EBO}	-6	
Collector Current	I_C	-150	mA
Collector Power Dissipation (total)	P_C	300(Note)	mW
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~ +150	

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.






2. 200mW per element must not be exceeded.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector to Base Breakdown Voltage	BV_{CBO}	$I_C = -50 \mu\text{A}$	-60			V
Collector to Emitter Breakdown Voltage	BV_{CEO}	$I_C = -1\text{mA}$	-50			
Emitter to Base Breakdown Voltage	BV_{EBO}	$I_E = -50 \mu\text{A}$	-6			
Collector Cut Off Current	I_{CBO}	$V_{CB} = -60 \text{ V}$			-0.1	μA
Emitter Cut Off Current	I_{EBO}	$V_{EB} = -6 \text{ V}$			-0.1	
Collector to Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = -50 \text{ mA}, I_B = -5 \text{ mA}$			-0.5	V
DC Forward Current Gain	h_{FE}	$V_{CE} = -6 \text{ V}, I_C = -1\text{mA}$	120		560	
Transition Frequency	f_T	$V_{CE} = -12\text{V}, I_E = 2\text{mA}, f = 100\text{MHz}$ (Note)		140		MHz
Output Capacitance	C_{OB}	$V_{CB} = -12\text{V}, I_E = 0\text{mA}, f = 1\text{MHz}$		4	5	pF

Note: Transition frequency of the device.

■ TYPICAL CHARACTERISTICS

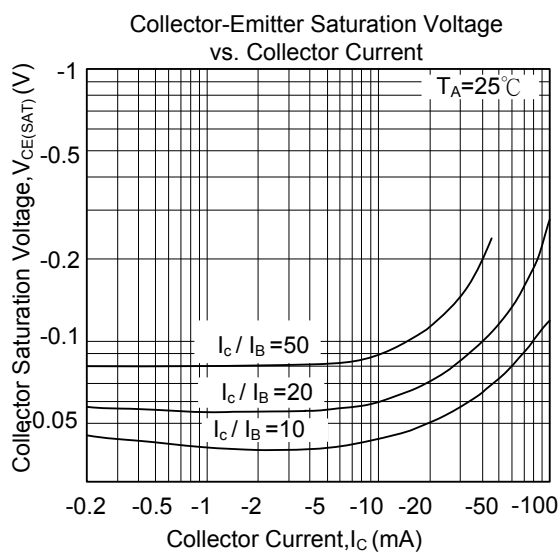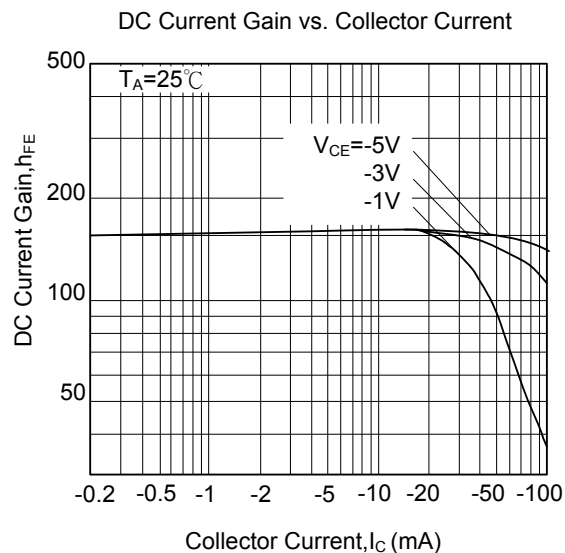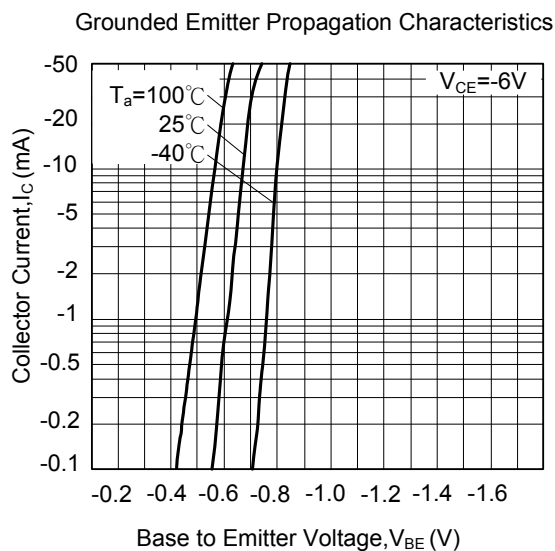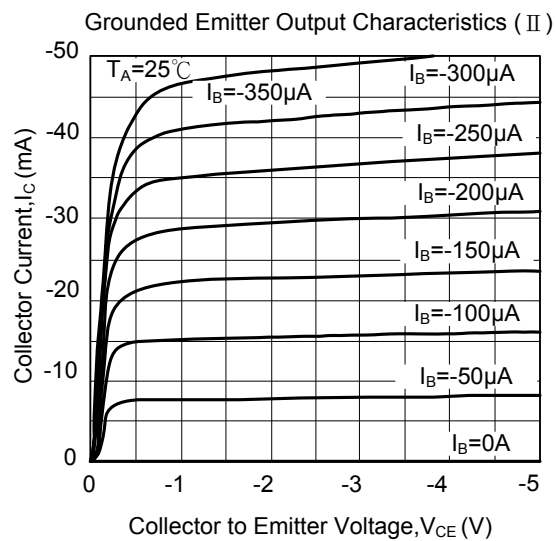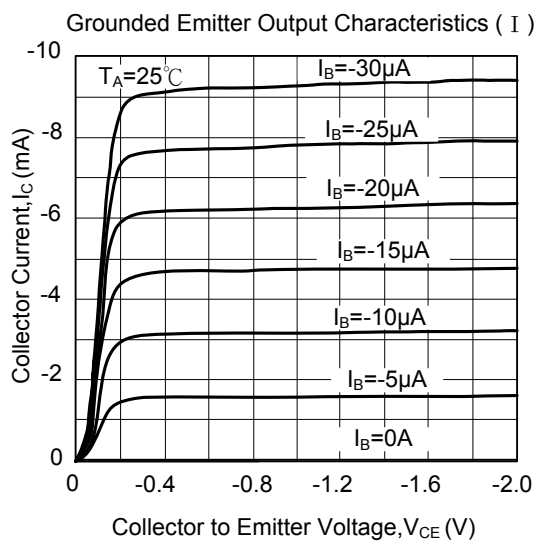

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.