

MAZ1000 Series

Silicon planar type

For stabilization of power supply

■ Features

- High reliability, achieved by the combination the planar type and the glass seal
- Large power dissipation: $P_D = 500$ mW (With a printed-circuit board)
- Wide voltage range: $V_Z = 2.0$ V to 39 V
- Easy-to-use because of the finely divided zener voltage ranks, such as L, M, and H ranks
- Sharp rising performance

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Average forward current	$I_{F(AV)}$	250	mA
Repetitive peak forward current	I_{FRM}	250	mA
Total power dissipation ^{*1}	P_{tot}	500	mW
Non-repetitive reverse surge power dissipation ^{*2}	P_{ZSM}	30	W
Junction temperature	T_j	200	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 to +200	$^\circ\text{C}$

Note) *1 : With a printed-circuit board

*2 : $t = 100$ μs , $T_j = 150^\circ\text{C}$

■ Common Electrical Characteristics $T_a = 25^\circ\text{C}$ ^{*1}


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage (DC)	V_F	$I_F = 10$ mA		0.8	0.9	V
Zener voltage ^{*2}	V_Z	I_Z Specified value				V
Operating resistance	R_{ZK}	I_Z Specified value	Refer to the list of the electrical characteristics within part numbers			Ω
	R_Z	I_Z Specified value				Ω
Reverse current	I_R	V_R Specified value				μA
Temperature coefficient of zener voltage ^{*3}	S_Z	I_Z Specified value				mV/ $^\circ\text{C}$
Terminal capacitance	C_t	V_R Specified value				pF

Note) 1. Rated input/output frequency: 5 MHz

2. *1 : The V_Z value is for the temperature of 25°C . In other cases, carry out the temperature compensation.

*2 : Guaranteed at 20 ms after power application.

*3 : $T_j = 25^\circ\text{C}$ to 150°C

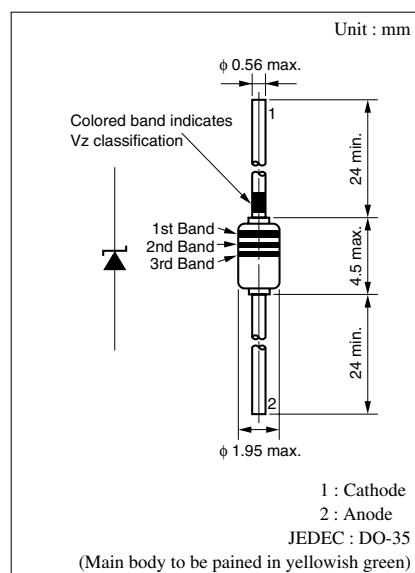

•Color indication of V_Z rank classification

L rank	M rank	H rank
Black	Blue	Red

■ Electrical characteristics within part numbers $T_a = 25^\circ\text{C}$

- $V_Z = 2.0 \text{ V to } 6.8 \text{ V}$ ($I_Z = 5 \text{ mA}$)

Part Number	Zener voltage			Reverse current			Operating resistance				Temperature coefficient of zener voltage			Terminal capacitance		Marking (Color indication) Main body: Yellowish green			
	V _Z (V) I _Z = 5 mA			I _{R1} (μA) V _R (V)	I _{R2} (μA) V _R (V)	R _Z (Ω) I _Z = 5 mA	R _{ZK} (Ω) I _Z (mA)	S _Z (mV/°C) I _Z = 5 mA	C _t (pF) (V _R = 0 V) f = 1 MHz										
	Min	Nom	Max	Max	Max	Typ	Max	Min	Typ	Max	Typ	Max	1st.	2nd.	3rd.				
MAZ1020	1.88	—	2.24	0.5	120	—	—	5	100	1	2000	−3.5	−1.5	0	375	450	Red	Black	Black
MAZ1020-L	1.88	—	2.12																
MAZ1020-H	2.01	—	2.24																
MAZ1022	2.08	—	2.45	0.7	120	—	—	5	100	1	2000	−3.5	−1.5	0	375	450	Red	Red	Red
MAZ1022-L	2.08	—	2.33																
MAZ1022-H	2.20	—	2.45																
MAZ1024	2.28	2.4	2.7	1	120	—	—	—	100	1	2000	−3.5	−1.6	0	375	450	Red	Yellow	Yellow
MAZ1024-L	2.28	—	2.56																
MAZ1024-H	2.4	—	2.7																
MAZ1027	2.5	2.7	2.9	1	100	—	—	—	100	1	1000	−3.5	−2	0	350	450	Red	Purple	Purple
MAZ1027-L	2.5	2.6	2.75																
MAZ1027-H	2.65	2.8	2.9																
MAZ1030	2.8	3.0	3.2	1	50	—	—	85	100	1	1000	−3.5	−2.1	0	350	450	Orange	Black	Black
MAZ1030-L	2.83	2.9	2.97																
MAZ1030-M	2.93	3.0	3.08																
MAZ1030-H	3.02	3.1	3.18	1	20	—	—	83	100	1	1000	−3.5	−2.4	0	325	450	Orange	Orange	Orange
MAZ1033	3.1	3.3	3.5																
MAZ1033-L	3.12	3.2	3.28																
MAZ1033-M	3.22	3.3	3.38	1	10	—	—	81	100	1	1000	−3.5	−2.4	0	300	450	Orange	Blue	Blue
MAZ1033-H	3.32	3.4	3.49																
MAZ1036	3.4	3.6	3.8																
MAZ1036-L	3.41	3.5	3.59	1	10	—	—	79	100	1	1000	−3.5	−2.5	0	300	450	Orange	White	White
MAZ1036-M	3.51	3.6	3.69																
MAZ1036-H	3.61	3.7	3.79																
MAZ1039	3.7	3.9	4.1	1	10	—	—	75	100	1	1000	−3.5	−2.5	0	275	450	Yellow	Orange	Orange
MAZ1039-L	3.71	3.8	3.9																
MAZ1039-M	3.8	3.9	4.0																
MAZ1039-H	3.9	4.0	4.1	1	3	—	—	50	80	1	900	−3.5	−1.4	0.2	130	180	Yellow	Purple	Purple
MAZ1043	4.0	4.3	4.6																
MAZ1043-L	4.03	4.1	4.26																
MAZ1043-M	4.17	4.3	4.4	2	2	—	—	40	60	1	800	−2.7	−0.8	1.2	110	160	Green	Brown	Brown
MAZ1043-H	4.31	4.4	4.54																
MAZ1047	4.4	4.7	5.0																
MAZ1047-L	4.45	4.6	4.69	2	1	—	—	15	40	1	500	−2	1.2	2.5	95	140	Green	Blue	Blue
MAZ1047-M	4.59	4.7	4.83																
MAZ1047-H	4.74	4.9	4.99																
MAZ1051	4.8	5.1	5.4	4	3	5.3	60	6	20	0.5	300	0.4	2.3	3.7	90	130	Blue	Red	Red
MAZ1051-L	4.87	5.0	5.12																
MAZ1051-M	5.0	5.1	5.26																
MAZ1051-H	5.14	5.3	5.4	4	2	5.9	60	6	15	0.5	140	1.2	3	4.5	85	110	Blue	Gray	Gray
MAZ1056	5.3	5.6	6.0																
MAZ1056-L	5.3	5.4	5.58																
MAZ1056-M	5.48	5.6	5.76	4	2	6.1	60	6	15	0.5	140	1.2	3	4.5	85	110	Blue	Gray	Gray
MAZ1056-H	5.66	5.8	5.95																
MAZ1062	5.8	6.2	6.6																
MAZ1062-L	5.85	6.0	6.15	4	2	6.3	60	6	15	0.5	140	1.2	3	4.5	85	110	Blue	Gray	Gray
MAZ1062-M	6.05	6.2	6.36																
MAZ1062-H	6.24	6.4	6.56																
MAZ1068	6.4	6.8	7.2	4	2	6.3	60	6	15	0.5	140	1.2	3	4.5	85	110	Blue	Gray	Gray
MAZ1068-L	6.44	6.6	6.77																
MAZ1068-M	6.64	6.8	6.98																
MAZ1068-H	6.85	7.0	7.2	4	2	6.3	60	6	15	0.5	140	1.2	3	4.5	85	110	Blue	Gray	Gray
MAZ1068-L	6.44	6.6	6.77																
MAZ1068-M	6.64	6.8	6.98																
MAZ1068-H	6.85	7.0	7.2																

■ Electrical characteristics within part numbers (continued) $T_a = 25^\circ\text{C}$

• $V_Z = 7.5\text{ V to }22\text{ V}$ ($I_Z = 5\text{ mA}$)

Part Number	Zener voltage			Reverse current			Operating resistance				Temperature coefficient of zener voltage			Terminal capacitance		Marking (Color indication) Main body: Yellowish green			
	V _Z (V)			I _{R1} (μA)	I _{R2} (μA)	R _Z (Ω)		R _{ZK} (Ω)		S _Z (mV/°C)			C _t (pF)						
	I _Z = 5 mA					I _Z = 5 mA		I _Z		I _Z = 5 mA			(V _R = 0 V) f = 1 MHz						
	Min	Mom	Max	V _R (V)	Max	V _R (V)	Max	Typ	Max	(mA)	Max	Min	Typ	Max	Typ	Max	1st.	2nd.	3rd.
MAZ1075	7.0	7.5	7.9	5	1	6.5	60	6	15	0.5	120	2.5	4	5.3	80	100	Purple	Green	Green
MAZ1075-L	7.07	7.3	7.43			6.5													
MAZ1075-M	7.29	7.5	7.67			6.7													
MAZ1075-H	7.51	7.7	7.89			7.0													
MAZ1082	7.7	8.2	8.7	5	0.5	7.2	60	6	15	0.5	120	3.2	4.6	6.2	75	95	Gray	Red	Red
MAZ1082-L	7.77	7.9	8.17			7.2													
MAZ1082-M	8.03	8.2	8.43			7.5													
MAZ1082-H	8.29	8.5	8.7			7.7													
MAZ1091	8.5	9.1	9.6	6	0.2	8	60	6	15	0.5	130	3.8	5.5	7	70	90	White	Brown	Brown
MAZ1091-L	8.58	8.8	9.02			8													
MAZ1091-M	8.87	9.1	9.33			8.3													
MAZ1091-H	9.14	9.4	9.6			8.6													
MAZ1100	9.4	10	10.6	7	0.2	8.9	60	8	20	0.5	130	4.5	6.4	8	70	90	Brown	Black	—
MAZ1100-L	9.44	9.7	9.92			8.9													
MAZ1100-M	9.75	10	10.25			9.2													
MAZ1100-H	10.07	10.3	10.59			9.5													
MAZ1110	10.4	11	11.6	7	0.1	9.9	60	10	20	0.5	170	5.4	7.4	9	65	85	Brown	Brown	—
MAZ1110-L	10.4	10.7	10.94			9.9													
MAZ1110-M	10.73	11	11.28			10.2													
MAZ1110-H	11.05	11.3	11.6			10.5													
MAZ1120	11.4	12	12.7	8	0.1	10.9	60	10	25	0.5	170	6	8.4	10	65	85	Brown	Red	—
MAZ1120-L	11.4	11.7	11.96			10.9													
MAZ1120-M	11.73	12	12.33			11.2													
MAZ1120-H	12.06	12.3	12.68			11.5													
MAZ1130	12.4	13	14.1	9	0.1	11.9	60	10	30	0.5	170	7	9.4	11	60	80	Brown	Orange	—
MAZ1130-L	12.4	12.7	12.99			11.9													
MAZ1130-M	12.73	13	13.4			12.2													
MAZ1130-H	13.25	13.7	14.08			12.7													
MAZ1140-M	13.65	14	14.35	9	0.1	13.1	60	10	30	0.5	170	7	10	13	60	80	Brown	Yellow	—
MAZ1150	13.9	15	15.6	10	0.05	13.4	60	10	30	0.5	170	9.2	11.4	13	55	75	Brown	Green	—
MAZ1150-L	13.9	14.3	14.76			13.4													
MAZ1150-M	14.6	15	15.35			14.1													
MAZ1150-H	14.95	15.3	15.6			14.4													
MAZ1160	15.3	16	17.1	11	0.05	14.8	60	10	40	0.5	170	10.4	12.4	14	52	75	Brown	Blue	—
MAZ1160-L	15.3	15.7	16.09			14.8													
MAZ1160-M	15.7	16	16.5			15.2													
MAZ1160-H	16.26	16.7	17.1			15.7													
MAZ1180	16.9	18	19.1	13	0.05	16.4	60	10	45	0.5	170	12.4	14.4	16	47	70	Brown	Gray	—
MAZ1180-L	16.9	17.3	17.76			16.4													
MAZ1180-M	17.55	18	18.45			17													
MAZ1180-H	18.2	18.7	19.1			17.7													
MAZ1200	18.8	20	21.2	14	0.05	18.3	60	15	55	0.5	180	14.4	16.4	18	36	60	Red	Black	—
MAZ1200-L	18.85	19.3	19.81			18.3													
MAZ1200-M	19.50	20	20.5			19													
MAZ1200-H	20.15	20.7	21.19			19.6													
MAZ1220	20.8	22	23.3	15	0.05	20.3	60	20	55	0.5	180	16.4	18.4	20	34	60	Red	Red	—
MAZ1220-L	20.8	21.3	21.86			20.3													
MAZ1220-M	21.45	22	22.55			20.9													
MAZ1220-H	22.1	22.7	23.24			21.6													

■ Electrical characteristics within part numbers (continued) $T_a = 25^\circ\text{C}$

• $V_Z = 24\text{ V}$ ($I_Z = 5\text{ mA}$)

Part Number	Zener voltage			Reverse current				Operating resistance				Temperature coefficient of zener voltage			Terminal capacitance		Marking (Color indication) Main body: Yellowish green		
	V _Z (V)			I _{R1} (μA)		I _{R2} (μA)	R _Z (Ω)		R _{ZK} (Ω)		S _Z (mV/°C)			C _t (pF)					
	I _Z = 5 mA			V _R		V _R		I _Z = 5 mA	I _Z		I _Z = 5 mA			(V _R = 0 V) f = 1 MHz					
	Min	Nom	Max	(V)	Max	(V)	Max	Typ	Max	(mA)	Max	Min	Typ	Max	Typ	Max	1st.	2nd.	3rd.
MAZ1240	22.8	24	25.6	17	0.05	22.3	60	25	70	0.5	180	18.4	20.4	22	33	55	Red	Yellow	—
MAZ1240-L	22.8	23.3	23.97			22.3													
MAZ1240-M	23.5	24	24.7			23.8													
MAZ1240-H	24.35	25	25.6			23.8													

• $V_Z = 27\text{ V}$ to 39 V ($I_Z = 2\text{ mA}$)

Part Number	Zener voltage			Reverse current				Operating resistance				Temperature coefficient of zener voltage			Terminal capacitance		Marking (Color indication) Main body: Yellowish green		
	V _Z (V) I _Z = 2 mA			I _{R1} (μA) V _R		I _{R2} (μA) V _R		R _Z (Ω) I _Z = 2 mA		R _{ZK} (Ω) I _Z		S _Z (mV/°C) I _Z = 2 mA			C _t (pF) (V _R = 0 V) f = 1 MHz				
	Min	Nom	Max	(V)	Max	(V)	Max	Typ	Max	(mA)	Max	Min	Typ	Max	Typ	Max			
																		1st.	2nd.
MAZ1270	25.1	27	28.9	19	0.05	24.8	60	25	80	0.5	200	21.4	23.4	25.3	30	50	Red	Purple	—
MAZ1270-L	25.3	26	26.7			24.8													
MAZ1270-M	26.3	27	27.7			25.8													
MAZ1270-H	27.3	28	28.7			26.8													
MAZ1300	28	30	32	21	0.05	27.8	60	30	80	0.5	200	24.4	26.6	29.4	27	50	Orange	Black	—
MAZ1300-L	28.3	29	29.7			27.8													
MAZ1300-M	29.3	30	30.8			28.8													
MAZ1300-H	30.2	31	31.8			29.7													
MAZ1330	31	33	35	23	0.05	30.7	60	35	80	0.5	200	27.4	29.7	33.4	25	45	Orange	Orange	—
MAZ1330-L	31.2	32	32.8			30.7													
MAZ1330-M	32.2	33	33.8			31.7													
MAZ1330-H	33.2	34	34.9			32.7													
MAZ1360	34	36	38	25	0.05	33.6	60	35	90	0.5	200	30.4	33	37.4	23	45	Orange	Blue	—
MAZ1360-L	34.1	35	35.9			33.6													
MAZ1360-M	35.1	36	36.9			34.6													
MAZ1360-H	36.1	37	37.9			35.6													
MAZ1390	37	—	41	27	0.05	36	60	—	130	0.5	250	33.4	36.4	41.2	21	45	Orange	White	—
MAZ1390-L	37.1	—	39			36													
MAZ1390-M	38	—	40			36													
MAZ1390-H	39	—	41			36													

Note) 1. The V_Z value is the one after power application for 20 ms at $T_a = 25^\circ\text{C}$.

2. The zener voltage temperature coefficient is the one for $T_j = 25^\circ\text{C}$ to 150°C .

