



15N06

Power MOSFET

15A, 60V N-CHANNEL POWER MOSFET



DESCRIPTION

The UTC **15N06** uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

FEATURES

- * $R_{DS(ON)} < 100m\Omega$ @ $V_{GS}=5V$, $I_D=7.5A$
- * Low capacitance
- * Low gate charge
- * Fast switching capability
- * Avalanche energy specified

SYMBOL

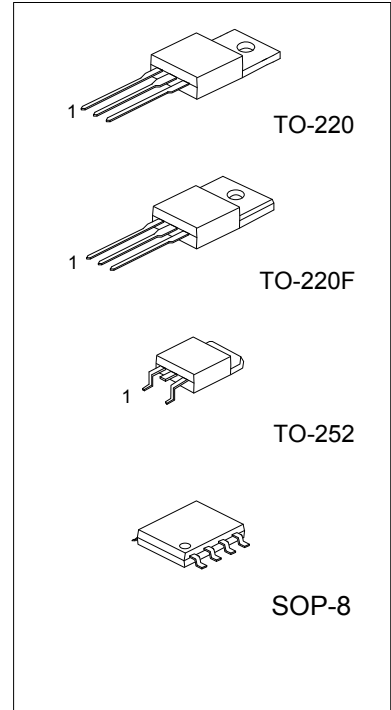

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
15N06L-TA3-T	15N06G-TA3-T	TO-220	G	D	S	-	-	-	-	-	Tube
15N06L-TF3-T	15N06G-TF3-T	TO-220F	G	D	S	-	-	-	-	-	Tube
15N06L-TN3-R	15N06G-TN3-R	TO-252	G	D	S	-	-	-	-	-	Tape Reel
15N06L-TN3-T	15N06G-TN3-T	TO-252	G	D	S	-	-	-	-	-	Tube
15N06L-S08-R	15N06G-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel
15N06L-S08-T	15N06G-S08-T	SOP-8	S	S	S	G	D	D	D	D	Tube

15N06L-TA3-T		(1)Packing Type	(1) R: Tape Reel, T: Tube
		(2)Package Type	(2) TA3: TO-220, TF3: TO-220F, TN3: TO-252
		(3)Lead Plating	(3) G: Halogen Free, L: Lead Free

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DS}	60	V
Drain-Gate Voltage ($R_G=20\text{k}\Omega$)		V_{DGR}	60	V
Gate-Source Voltage		V_{GSS}	± 15	V
Continuous Drain Current ($T_C=25^\circ\text{C}$)		I_D	15	A
Pulsed Drain Current (Note 2)		I_{DM}	60	A
Avalanche Current (Note 3)		I_{AR}	15	A
Avalanche Energy	Single Pulsed (Note 4)	E_{AS}	50	mJ
	Repetitive (Note 3)	E_{AR}	12	mJ
Power Dissipation ($T_A=25^\circ\text{C}$)	TO-220	P_D	40	W
	TO-220F		21	
	TO-252		28	
	SOP-8		2.0	
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Pulse width limited by safe operating area.

3. Pulse width limited by $T_{J(\text{MAX})}$, $\delta < 1\%$

4. Starting $T_J=25^\circ\text{C}$, $I_D=I_{AR}$, $V_{DD}=25\text{V}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/ TO-220F	θ_{JA}	62.5	$^\circ\text{C/W}$
	TO-252		110	
	SOP-8		125	
Junction to Case	TO-220	θ_{JC}	3.13	$^\circ\text{C/W}$
	TO-220F		5.95	
	TO-252		4.53	
	SOP-8		62.5	

■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0\text{V}$, $I_D=250\mu\text{A}$	60			V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=\text{Max Rating}$			250	μA
Gate-Source Leakage Current	I_{GSS}	$V_{DS}=0\text{V}$, $V_{GS}=\pm 15\text{V}$			± 100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(\text{TH})}$	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$	1	1.7	2.5	V
On State Drain Current	$I_{D(\text{ON})}$	$V_{DS}>I_{D(\text{ON})}\times R_{DS(\text{ON})\text{MAX}}$, $V_{GS}=10\text{V}$	15			A
Static Drain-Source On-Resistance	$R_{DS(\text{ON})}$	$V_{GS}=5\text{V}$, $I_D=7.5\text{A}$		75	100	m Ω
Forward Transconductance (Note 1)	g_{FS}	$V_{DS}>I_{D(\text{ON})}\times R_{DS(\text{ON})\text{MAX}}$, $I_D=7.5\text{A}$	3	5		S
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{DS}=25\text{V}$, $V_{GS}=0\text{V}$, $f=1\text{MHz}$		700	950	pF
Output Capacitance	C_{OSS}			230	310	pF
Reverse Transfer Capacitance	C_{RSS}			80	110	pF


■ ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SWITCHING PARAMETERS						
Total Gate Charge	Q _G	V _{DD} =40V, V _{GS} =5V, I _D =15A		18	30	nC
Gate Source Charge	Q _{GS}			8		
Gate Drain Charge	Q _{GD}			9		
Turn-ON Delay Time	t _{D(ON)}	V _{GS} =5V, V _{DD} =30V, R _G =4.7Ω, I _D =7.5A		15	60	ns
Turn-ON Rise Time	t _R			160	200	
Turn-OFF Delay Time	t _{D(OFF)}	V _{GS} =10V, V _{DD} =48V, R _G =47Ω, I _D =15A		52	80	ns
Turn-OFF Fall-Time	t _F			100	140	
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Diode Forward Voltage	V _{SD}	I _{SD} =15 A,V _{GS} =0V(Note 1)			1.5	V
Source-Drain Current	I _{SD}				15	A
Source-Drain Current (Pulse)	I _{SDM}	(Note 2)			60	A


Note: 1. Pulse width=300 μ s, duty cycle=1.5%

2. Pulse width limited by safe operating area

■ TEST CIRCUITS AND WAVEFORMS

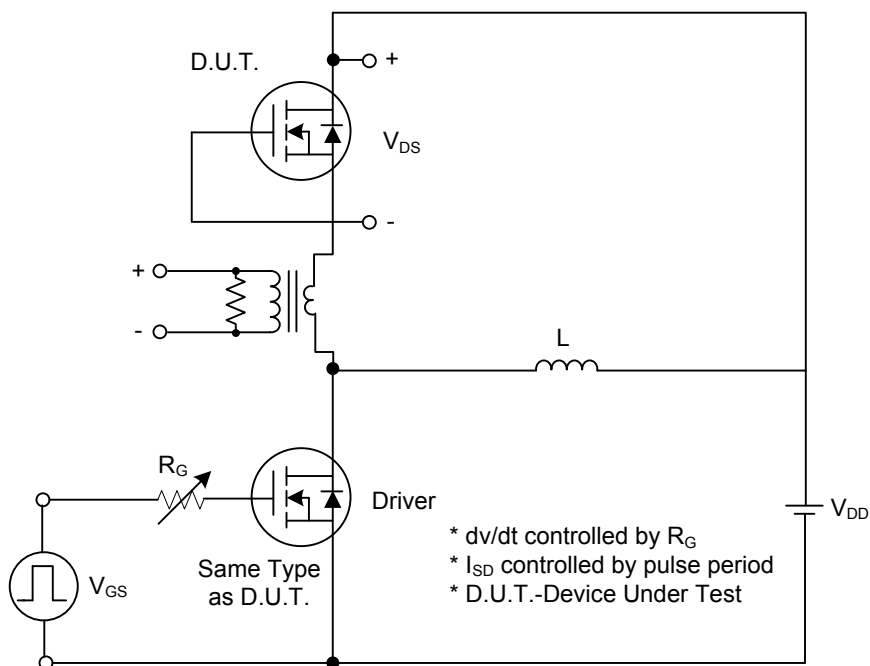


Peak Diode Recovery dv/dt Test Circuit

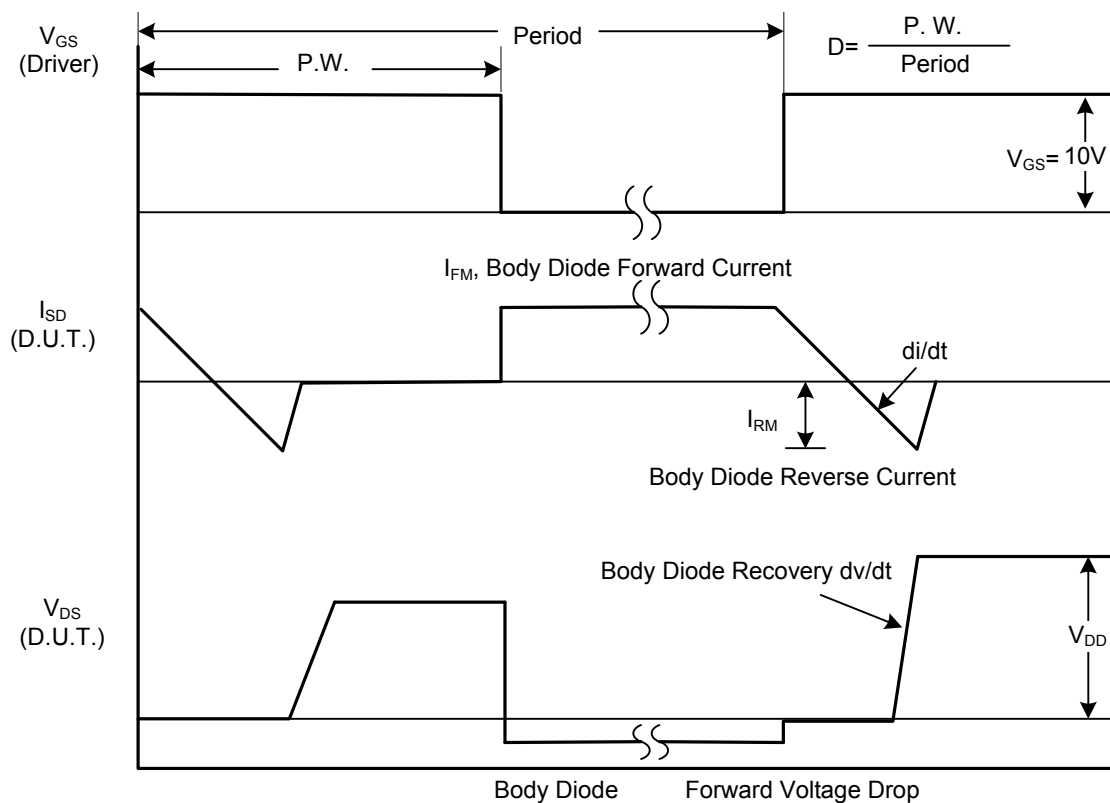


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS (Cont.)

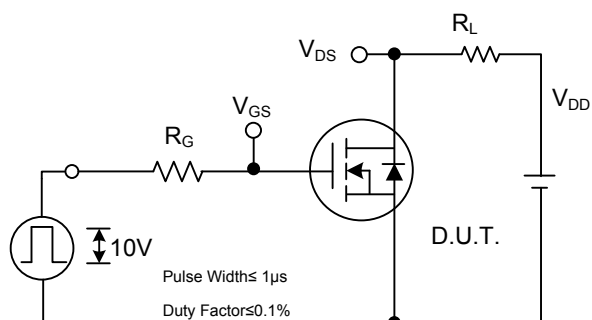


Switching Test Circuit

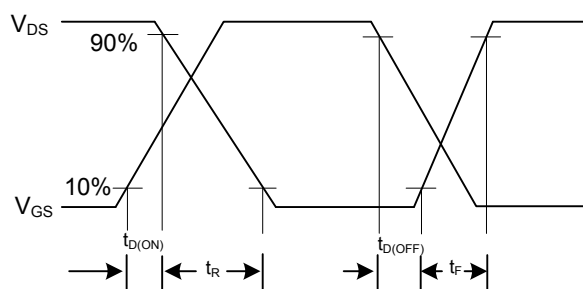


Switching Waveforms

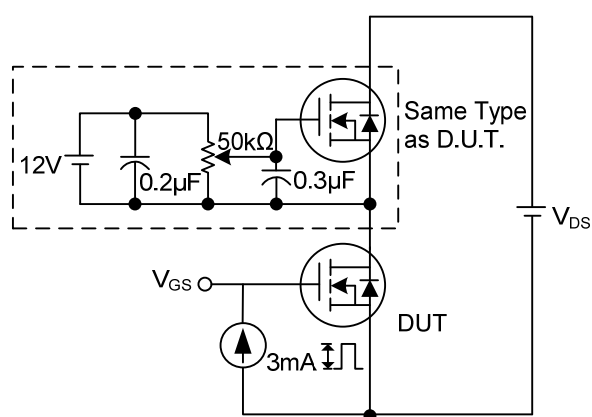


Gate Charge Test Circuit

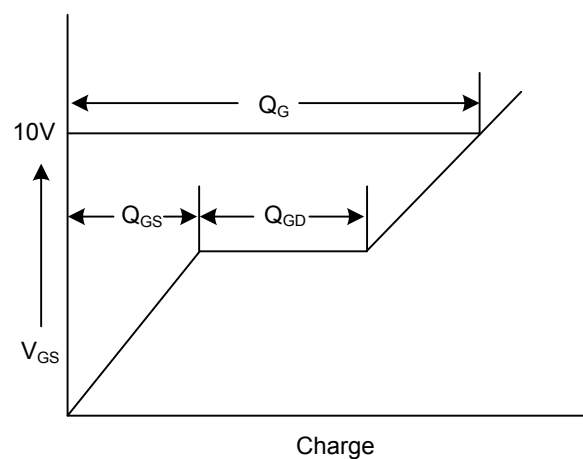

Gate Charge Waveform




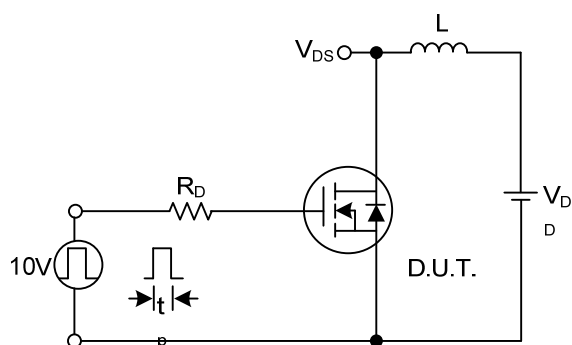


Unclamped Inductive Switching Test Circuit

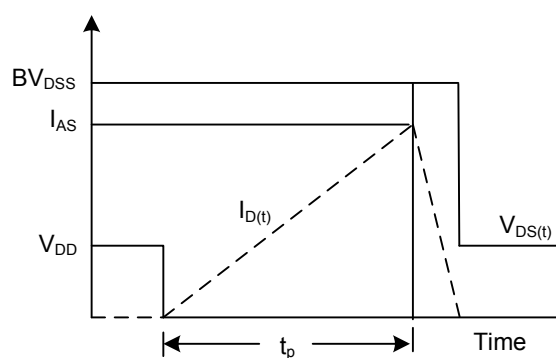

Unclamped Inductive Switching Waveforms

■ TYPICAL CHARACTERISTICS

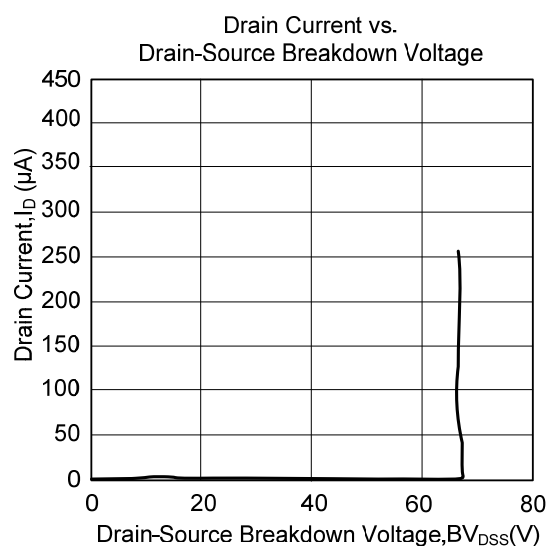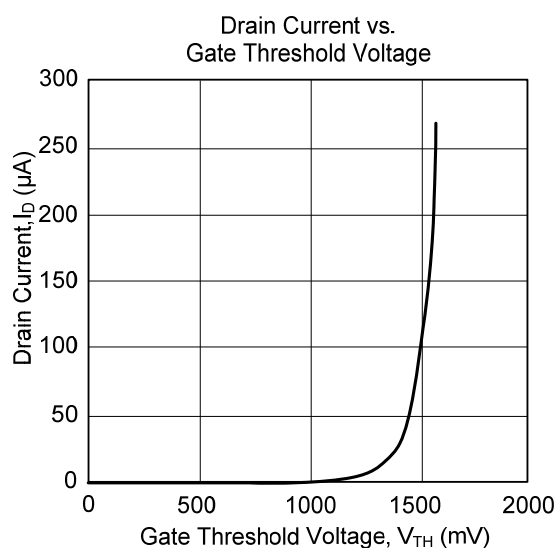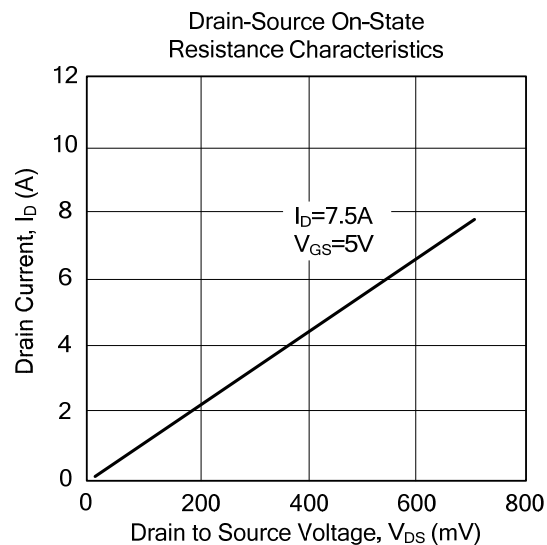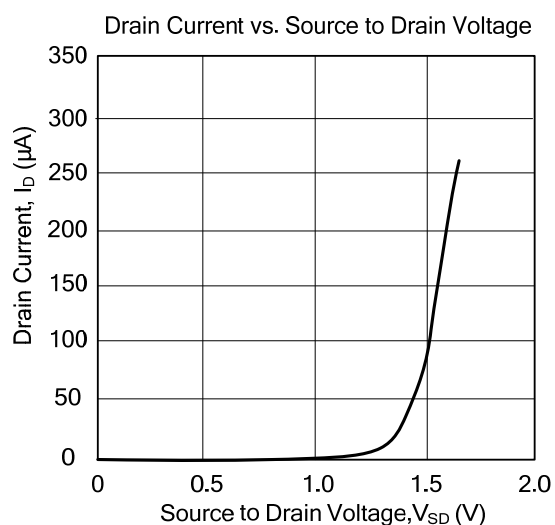

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.